


## 45mm Compact Hex Instructions 1.5mx1.5m & 3mx3m

**WARNING READ INSTRUCTIONS CAREFULLY BEFORE USE**

### Attaching Roof to Frame

Recommended procedure below. For safety reasons it is recommended that 2 persons set up any marquee.

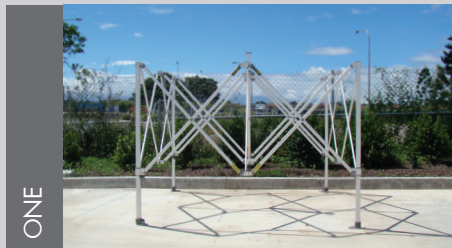

ONE

Open frame 75% of full extension.



TWO

Position the roof on frame.



THREE

After fitting the roof on the frame connect the velcro around the legs at the top of the frame.



ROOF CAP

Fit the center of the roof on top of the center pole. If your marquee has a cap pull strings until tight.



TRANSPORTATION

**Transportation of marquees.** The marquee must be stood upright during transit. If your marquee needs to be positioned horizontally you **MUST** remove the roof to prevent damage.



### Set Up Instructions



ONE

Grasp marquee truss bars (2 people). Open frame 75% of full extension. (Ensure there are no trip hazards).



TWO

Fold the roof back exposing the centre pole, extend the pole and lock into position.



THREE

Walk backwards and open frame fully.



FOUR

Lift all four roof connectors until pin locks into position.



FIVE

Extend the lower section of the legs and lock into position. Repeat other side.



SIX

Extend the upper section of the legs and lock into position. Repeat other side.

SEVEN



Attach roof straps by looping straps around frame and engaging clip.

EIGHT



View of marquee set up.

NINE



Fit sandbags or steel pins to anchor into position.

## Pack Down Instructions

Recommended procedure below. For safety reasons it is recommended that 2 persons pack down any marquee.

ONE



Remove sandbags or steel pins.

TWO



Unclip roof straps.

THREE



With the frame fully up, pull all roof connector pins.

FOUR



Pull upper leg pins and retract back legs. Repeat on other side.

FIVE



Pull lower leg pins and fully retract front legs. Repeat on other side

SIX



Walk marquee inwards until frame is 75% of full extension.

SEVEN



Fold the roof back exposing the centre pole, retract the centre pole and lock into position.

EIGHT



Walk marquee inwards until completely folded.

NINE



Release velcro straps and remove roof for transportation.

ROOF CAP



IF marquee has roof cap release string until loose.

TEN



Fit the protective cover to frame and store roof in protective cover.

TRANSPORTATION



### Transportation of marquees.

The marquee must be stood upright during transit. If your marquee needs to be positioned horizontally you **MUST** remove the roof to prevent damage.



# EXTREME TENT ACCESSORY INSTRUCTIONS

## Half Wall Instructions

ONE

Attach half wall display connector to marquee leg. Repeat on other side.

TWO

Insert half wall display bar through half wall sleeve.

THREE

Tighten half wall display connector. Attach velcro tabs to marquee legs.

## Half Wall Support Instructions

ONE

Attach the half wall support to the display bar.

TWO

Adjust the height of the support leg until securely in position.

THREE

Completed Half Wall with Support.

## Full Wall Instructions



Put wall hooks through eyelets in roof flap (face hooks inwards).



Attach velcro tabs to marquee legs.



Completed Wall.

## Awning Instructions - 32mm Mate / 30mm Explorer / 37mm K2 / 40mm Summit



Attach awning leg connector to marquee frame.



Attach centre support pole to the truss bar of the marquee.



Insert the awning poles (2) into the awning sleeve. Attach the awning to the awning leg connector.



Attach awning clips to inner flap on marquee roof.

## Rain Gutter Instructions



Position marquees side by side and attach leg connector and tighten.



Put gutter hooks through eyelets in roof flap (face hooks inwards).



Attach rain gutter strip to marquee wall.

## Banner Instructions



Fix marquee banner connector to marquee leg.



Insert banner pole into rotary bearing.



Push down to lock into position.

## Marquee Locking System



Position the marquee lock connector on marquee leg. Repeat on all four legs.



Insert the steel lock bar into the lock connector. Repeat on all four sides.



Along the bottom edge of wall attach velcro to the steel lock bar.



Attach padlocks through zip and eyelets.