



Prime Consulting Engineers Pty. Ltd.

Design Report:

4m X 6m Inflatable Marquee

For



Ref: R-22-253-1

Date: 01/07/2022

Amendment: -

Prepared by: KZ

Checked by: BG

CONTENTS

1	Introduction and Scope:	3
1.1	Project Description	3
1.2	References	3
1.3	Notation	3
2	Design Overview	4
2.1	Geometry Data	4
2.2	Assumptions & Limitations	5
2.3	Exclusions	5
2.4	Design Parameters and Inputs	5
2.4.1	Load Cases	5
2.4.2	Load Combinations	5
3	Design Loads	6
4	Wind Analysis	7
4.1	Ultimate	7
4.1.1	Summary Forces	13
5	Load Diagrams	14
5.1	Wind Load	14
5.1.1	Wind Direction 1 (min)	14
5.1.2	Wind Direction 1 (max)	15
5.1.3	Wind Direction 2 (min)	16
5.1.4	Wind Direction 2 (max)	17
5.1.5	Wind Load Internal Suction ($W_{l,suction}$)	18
5.1.6	Wind Load Internal Suction ($W_{l,pressure}$)	19
6	Analysis	20
6.1	3D model	20
6.2	Results	21
6.2.1	Maximum Reactions	21
7	Holding Down	22
8	Summary and Recommendations	23
9	Appendix A – Detail Drawings	24

1 Introduction and Scope:

The report and certification are the sole property of Prime Consulting Engineers Pty. Ltd.

Prime Consulting Engineers have been engaged by Extreme Marquees Pty. Ltd. to carry out a wind analysis on 4m X 6m Inflatable marquee for various wind speeds (region A, non-cyclonic). It should be noted that the outcome of our analysis is limited to the selected items as outlined in this report.

This report shall be read in conjunction with the documents listed in the references (Section 1.2)

1.1 Project Description

The report examines the effect of 3s gust wind of various wind speeds (**refer to summary**) positioned for the worst effect on the 4m X 6m Marque structure to determine holding down weight requirements. The relevant Australian Standards AS1170.0:2002 General principles, AS1170.1:2002 Permanent, imposed and other actions and AS1170.2:2021 Wind are used.

1.2 References


- The documents referred to in this report are as follows:
 - Report of results produced through SAP2000 V24 software & excel spreadsheets.
 - Detail drawing provided by manufacturer. Refer to appendix 'A'.
- The basic standards used in this report are as follows:
 - AS 1170.0:2002 – Structural Design Actions (Part 0: General principles)
 - AS 1170.1:2002 – Structural Design Actions (Part 1: Permanent, imposed, and other actions)
 - AS 1170.2:2021 – Structural Design Actions (Part 2: Wind Actions)
- The program(s) used for this analysis are as follows:
 - SAP2000 V24
 - Microsoft Excel

1.3 Notation

<i>AS/NZS</i>	Australian Standard/New Zealand Standard
<i>FEM/FEA</i>	Finite Element Method/Finite Element Analysis
<i>SLS</i>	Serviceability Limit State
<i>ULS</i>	Ultimate Limit State

2 Design Overview

2.1 Geometry Data

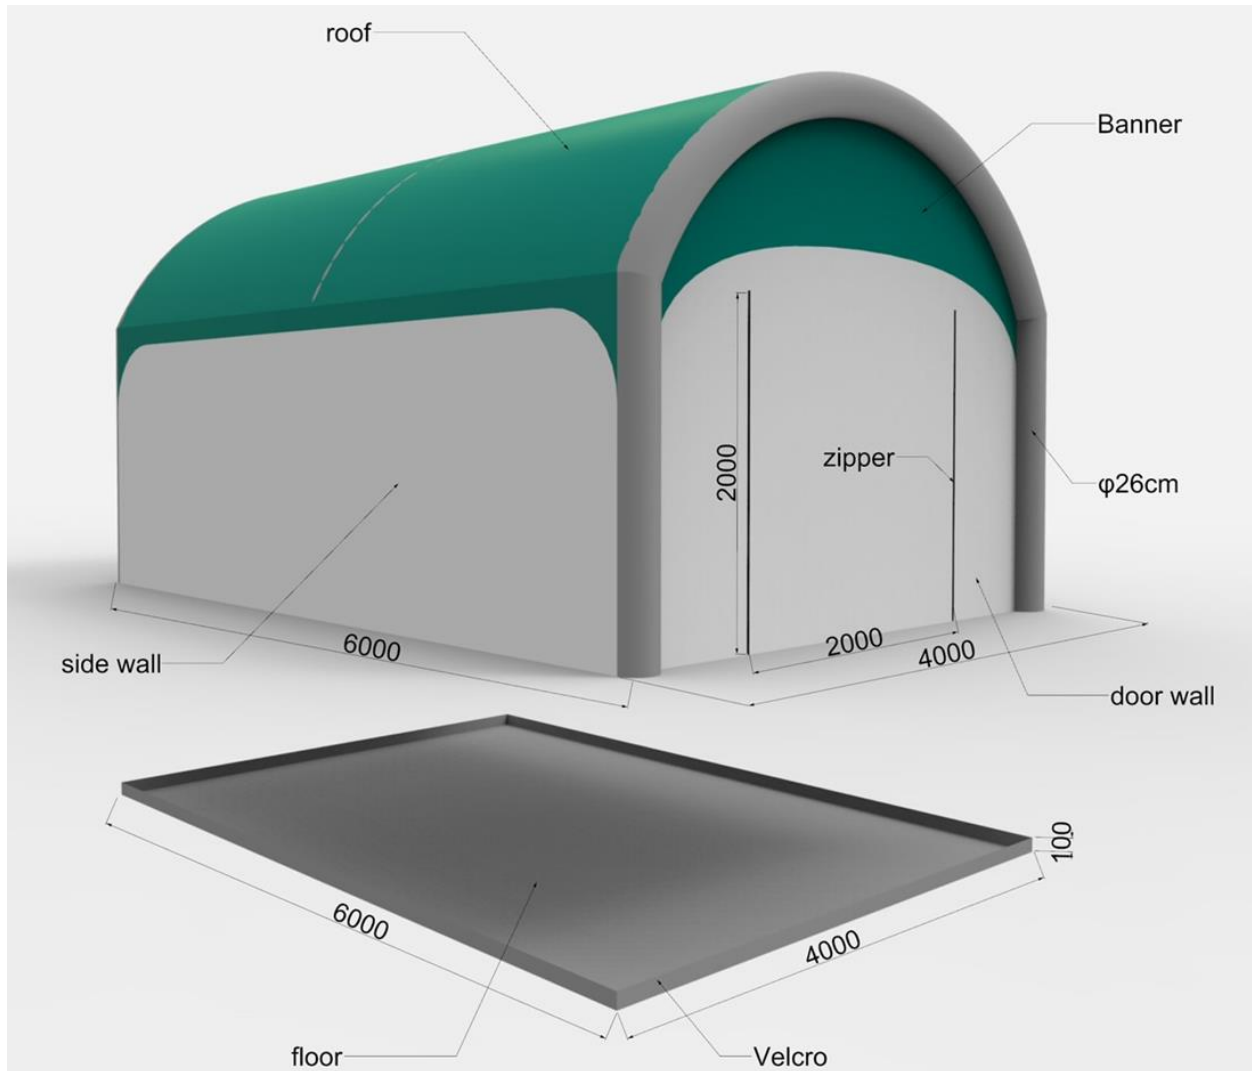

Isometric view of structures

2.2 Assumptions & Limitations

- The erected structure is for temporary use only.
- For forecast winds in excess of **(refer to summary)** the inflatable structure should be completely deflated.
- The structure may only be used in regions with classifications no greater than the limits specified in cl. 4 of this report.
- Parameters used for wind & snow calculations:
 - TC 2
 - Wind Region A
- Topographical factors such as erecting the structure on the crest of a hill or on the top of an escarpment may result in a higher wind speed classification. Thus, special considerations should be taken to the topographical location of the installation site.
- Shall the site conditions/wind parameters exceed prescribed design wind actions (refer to Cl.4), Prime Consulting Engineers Pty. Ltd. should be informed to determine appropriate wind classifications and amend computations accordingly.
- It is assumed that the structure is fully enclosed with equally permeable side walls or completely sealed walls to calculate Wind Internal Forces.
- The structure has the total self-weight of 40kg.

2.3 Exclusions

- Design of PVC members & fabric
- Wind actions due to tropical or severe tropical cyclonic areas.
- Snow actions
- Super imposed loads such as live load.

2.4 Design Parameters and Inputs

2.4.1 Load Cases

- | | | |
|----|----|----------------------------------|
| 1. | G | Permanent actions (Dead load) |
| 2. | Wu | Ultimate wind action (ULS) |
| 3. | Ws | Serviceability wind action (SLS) |

2.4.2 Load Combinations

Strength (ULS):

-
- | | | |
|----|-------------------|----------------------------|
| 1. | $1.35G$ | Permanent action only |
| 2. | $0.9G+W_u$ | Permanent and wind actions |
| 3. | $1.2G+W_u$ | Permanent and wind actions |
| 4. | $1.2G+W_u+W_{IS}$ | Permanent and wind actions |
| 5. | $0.9G+W_u+W_{IP}$ | Permanent and wind actions |

Serviceability (SLS):

- | | | |
|----|---------|----------------------|
| 1. | $G+W_s$ | Wind service actions |
|----|---------|----------------------|

3 Design Loads

Self weight	G	self weight
3s 80km/hr gust	W_u	$0.242 C_{fig} \text{ (kPa)}$



4 Wind Analysis

4.1 Ultimate



Project: 4m x 6m inflatable Tent

Jon no. 22-253-1

Designer: KZ

Date: 01/07/2022

Amendment: -

Name	Symbol	Value	Unit	Notes	Ref.
General					
Importance level		2			Table 3.1 - Table 3.2 (AS1170.0)
Annual probability of exceedance		Temporary			Table 3.3
Regional gust wind speed		80.00	Km/hr		
Regional gust wind speed	V_R	22.222	m/s		
Wind Direction Multipliers	M_d	1			Table 3.2 (AS1170.2)
Terrain Category	TC	2			
Terrain Category Multiplier	$M_{Z,Cat}$	0.91			
Shield Multiplier	M_S	1			4.3 (AS1170.2)
Topographic Multiplier	M_t	1			4.4 (AS1170.2)
Site Wind Speed	$V_{Site,\beta}$	20.22	m/s	$V_{Site,\beta} = V_R * M_d * M_{Z,Cat} * M_S * M_t$	
Width	B	4	m		
Width Span	S_w	4	m		
Length	D	6	m		
Height	Z	2.7	m		
Bay Span		3	m		
	h/d	0.45			
	h/b	0.68			
Wind Pressure					
ρ_{air}	ρ	1.2	Kg/m ³		
dynamic response factor	C_{dyn}	1			
Wind Pressure	$\rho * C_{fig}$	0.245	Kg/m ²	$\rho = 0.5 \rho_{air} * (V_{des,\beta})^2 * C_{fig} * C_{dyn}$	2.4 (AS1170.2)

WIND DIRECTION 1 (Perpendicular to Length)				
Internal Pressure				
Opening Assumption				
		Without Dominant Opening		
Internal Pressure Coefficient (Without Dominant) MIN		-0.3		
Internal Pressure Coefficient (Without Dominant) MAX		0.2		
Internal Pressure Coefficient (With Dominant) MIN				
Internal Pressure Coefficient (With Dominant) MAX				
N				Cpi= N*Cpe
Combination Factor	KC,i	1		
Internal Pressure Coefficient MIN	Cp,i	-0.30		
Internal Pressure Coefficient MAX	Cp,i	0.20		
External Pressure				
1. Windward Wall				
External Pressure Coefficient	CP,e	0.7		Table 5.4
Area Reduction Factor	Ka	1		
combination factor applied to internal pressures	KC,e	0.8		
local pressure factor	Kl	1		
porous cladding reduction factor	Kp	1		
aerodynamic shape factor	Cfig,e	0.56		
Wind Wall Pressure	P	0.14	kPa	
Edge Column Force	F	0.21	kN/m	
Intermediate Column Force	F	0.41	kN/m	
2. Leeward Wall				
External Pressure Coefficient	CP,e	-0.5		Table 5.4
Area Reduction Factor	Ka	1		
combination factor applied to internal pressures	KC,e	0.8		
local pressure factor	Kl	1		
porous cladding reduction factor	Kp	1		
aerodynamic shape factor	Cfig,e	-0.4		

Leeward Wall Pressure	P	-0.10	kPa		
Edge Column Force	F	-0.15	kN/m		
Intermediate Column Force	F	-0.29	kN/m		
3. Side Wall					
Area Reduction Factor	K _a	1			Table 5.4
combination factor applied to internal pressures	K _{C,e}	0.8			
local pressure factor	K _l	1			
porous cladding reduction factor	K _p	1			
External Pressure Coefficient	C _{P,e}	-0.65		0 to 1h	
External Pressure Coefficient	C _{P,e}	-0.5		1h to 2h	
External Pressure Coefficient	C _{P,e}	-0.3		2h to 3h	
External Pressure Coefficient	C _{P,e}	-0.2		>3h	
aerodynamic shape factor	C _{fig,e}	-0.52		0 to 1h	
aerodynamic shape factor	C _{fig,e}	-0.4		1h to 2h	
aerodynamic shape factor	C _{fig,e}	-0.24		2h to 3h	
aerodynamic shape factor	C _{fig,e}	-0.16		>3h	
Side Wall Pressure	P	-0.13	kPa	0 to 1h	
Side Wall Pressure	P	-0.10	kPa	1h to 2h	
Side Wall Pressure	P	-0.06	kPa	2h to 3h	
Side Wall Pressure	P	-0.04	kPa	>3h	
4. Roof					
r (rise)	r	1.4	m		
h/r	h/r	1.93			
Breadth Effect		1.11		(b/d) ^{0.25} >1	
Rise-to-span ratio	r/d	0.23			
4.1 Roof Windward Quarter					
U	U	1	m		Table C3
Area Reduction Factor	K _a	1			
combination factor applied to internal pressures	K _{C,e}	0.8			
local pressure factor	K _l	1			
porous cladding reduction factor	K _p	1			
External Pressure Coefficient	C _{P,e}	-0.47			
Factored External Pressure Coefficient	C _{P,e}	-0.52			
aerodynamic shape factor	C _{fig,e}	-0.42			

Pressure	P	-0.10	kPa		
4.2 Roof Centre Half					
T	T	2	m		Table C3
Area Reduction Factor	K _a	1			
combination factor applied to internal pressures	K _{C,e}	0.8			
local pressure factor	K _l	1			
porous cladding reduction factor	K _p	1			
External Pressure Coefficient	C _{P,e}	-0.94			
Factored External Pressure Coefficient	C _{P,e}	-1.04			
aerodynamic shape factor	C _{fig,e}	-0.83			
Pressure	P	-0.20	kPa		
4.2 Roof Centre Half					
D	D	1	m		Table C3
Area Reduction Factor	K _a	1			
combination factor applied to internal pressures	K _{C,e}	0.8			
local pressure factor	K _l	1			
porous cladding reduction factor	K _p	1			
External Pressure Coefficient	C _{P,e}	-0.64			
Factored External Pressure Coefficient	C _{P,e}	-0.71			
aerodynamic shape factor	C _{fig,e}	-0.57			
Pressure	P	-0.14	kPa		
WIND DIRECTION 2 (Parallel to Length)					
Internal Pressure					
Opening Assumption	Without Dominant Opening				
Internal Pressure Coefficient (Without Dominant) MIN		-0.3			
Internal Pressure Coefficient (Without Dominant) MAX		0.2			
Internal Pressure Coefficient (With Dominant) MIN					
Internal Pressure Coefficient (With Dominant) MAX					

N				$C_{pi} = N \cdot C_{pe}$	
Combination Factor	$K_{C,i}$	1			
Internal Pressure Coefficient MIN	$C_{p,i}$	-0.30			
Internal Pressure Coefficient MAX	$C_{p,i}$	0.20			
External Pressure					
1. Windward Wall					
External Pressure Coefficient	$C_{P,e}$	0.7			Table 5.4
Area Reduction Factor	K_a	1			
combination factor applied to internal pressures	$K_{C,e}$	0.8			
local pressure factor	K_l	1			
porous cladding reduction factor	K_p	1			
aerodynamic shape factor	$C_{fig,e}$	0.56			
Wind Wall Pressure	P	0.14	kPa		
Edge Column Force	F	0.27	kN/m		
Intermediate Column Force	F	0.55	kN/m		
2. Leeward Wall					
External Pressure Coefficient	$C_{P,e}$	-0.4			Table 5.4
Area Reduction Factor	K_a	1			
combination factor applied to internal pressures	$K_{C,e}$	0.8			
local pressure factor	K_l	1			
porous cladding reduction factor	K_p	1			
aerodynamic shape factor	$C_{fig,e}$	-0.32			
Lee Wall Pressure	P	-0.08	kPa		
Edge Column Force	F	-0.64	kN/m		
Intermediate Column Force	F	-1.28	kN/m		
3. Side Wall					
Area Reduction Factor	K_a	1			Table 5.4
combination factor applied to internal pressures	$K_{C,e}$	0.8			
local pressure factor	K_l	1			
porous cladding reduction factor	K_p	1			
External Pressure Coefficient	$C_{P,e}$	-0.65		0 to 1h	
External Pressure Coefficient	$C_{P,e}$	-0.5		1h to 2h	
External Pressure Coefficient	$C_{P,e}$	-0.3		2h to 3h	
External Pressure Coefficient	$C_{P,e}$	-0.2		>3h	
aerodynamic shape factor	$C_{fig,e}$	-0.52		0 to 1h	
aerodynamic shape factor	$C_{fig,e}$	-0.4		1h to 2h	
aerodynamic shape factor	$C_{fig,e}$	-0.24		2h to 3h	

aerodynamic shape factor	$C_{fig,e}$	-0.16		$>3h$	
Side Wall Pressure	P	-0.13	kPa	<i>0 to 1h</i>	
Side Wall Pressure	P	-0.10	kPa	<i>1h to 2h</i>	
Side Wall Pressure	P	-0.06	kPa		
Side Wall Pressure	P	-0.04	kPa		
4. Roof				$\alpha < 10^\circ$	
Area Reduction Factor	K_a	1			
combination factor applied to internal pressures	$K_{C,e}$	0.8			
local pressure factor	K_l	1			
porous cladding reduction factor	K_p	1			
External Pressure Coefficient MIN	$C_{P,e}$	-0.9		<i>0 to 0.5h</i>	
External Pressure Coefficient MIN	$C_{P,e}$	-0.9		<i>0.5 to 1h</i>	
External Pressure Coefficient MIN	$C_{P,e}$	-0.5		<i>1h to 2h</i>	
External Pressure Coefficient MIN	$C_{P,e}$	-0.3		<i>2h to 3h</i>	
External Pressure Coefficient MIN	$C_{P,e}$	-0.2		<i>>3h</i>	
External Pressure Coefficient MAX	$C_{P,e}$	-0.4		<i>0 to 0.5h</i>	
External Pressure Coefficient MAX	$C_{P,e}$	-0.4		<i>0.5 to 1h</i>	
External Pressure Coefficient MAX	$C_{P,e}$	0		<i>1h to 2h</i>	
External Pressure Coefficient MAX	$C_{P,e}$	0.1		<i>2h to 3h</i>	
External Pressure Coefficient MAX	$C_{P,e}$	0.2		<i>>3h</i>	
aerodynamic shape factor MIN	$C_{fig,e}$	-0.72		<i>0 to 0.5h</i>	
aerodynamic shape factor MIN	$C_{fig,e}$	-0.72		<i>0.5 to 1h</i>	
aerodynamic shape factor MIN	$C_{fig,e}$	-0.4		<i>1h to 2h</i>	
aerodynamic shape factor MIN	$C_{fig,e}$	-0.24		<i>2h to 3h</i>	
aerodynamic shape factor MIN	$C_{fig,e}$	-0.16		<i>>3h</i>	
aerodynamic shape factor MAX	$C_{fig,e}$	-0.32		<i>0 to 0.5h</i>	
aerodynamic shape factor MAX	$C_{fig,e}$	-0.32		<i>0.5 to 1h</i>	
aerodynamic shape factor MAX	$C_{fig,e}$	0		<i>1h to 2h</i>	
aerodynamic shape factor MAX	$C_{fig,e}$	0.08		<i>2h to 3h</i>	
aerodynamic shape factor MAX	$C_{fig,e}$	0.16		<i>>3h</i>	
Pressure MIN	P	-0.18	kPa	<i>0 to 0.5h</i>	
Pressure MIN	P	-0.18	kPa	<i>0.5 to 1h</i>	

Pressure MIN	P	-0.10	kPa	1h to 2h	
Pressure MIN	P	-0.06	kPa	2h to 3h	
Pressure MIN	P	-0.04	kPa	>3h	
Pressure MAX	P	-0.08	kPa	0 to 0.5h	
Pressure MAX	P	-0.08	kPa	0.5 to 1h	
Pressure MAX	P	0.00	kPa	1h to 2h	
Pressure MAX	P	0.02	kPa	2h to 3h	
Pressure MAX	P	0.04	kPa	>3h	


4.1.1 Summary Forces

WIND EXTERNAL PRESSURE							
				Wind Direction1 (Perpendicular to Length)		Wind Direction2 (Parallel to Length)	
Windward				0.14		0.14	
Leeward				-0.10		-0.08	
Sidewall	0m - 2.7m			-0.13		-0.13	
	2.7m - 5.4m			-0.10		-0.10	
	5.4m - 8.1m			-0.06		-0.06	
	> 8.1m			-0.04		-0.04	
Roof				0m - 1.35m		-0.18	-0.08
	Windward Quarter (U)	1m	-0.10	1.35m - 2.7m		-0.18	-0.08
	Centre Half (T)	2m	-0.20	2.7m - 5.4m		-0.10	0.00
	Leeward Quarter (D)	1m	-0.14	5.4m - 8.1m		-0.06	0.02
				>8.1m		-0.04	0.04
Wind Internal Pressure (kPa)							
				-0.07	0.05	-0.07	0.05


5 Load Diagrams

5.1 Wind Load


5.1.1 Wind Direction 1 (min)

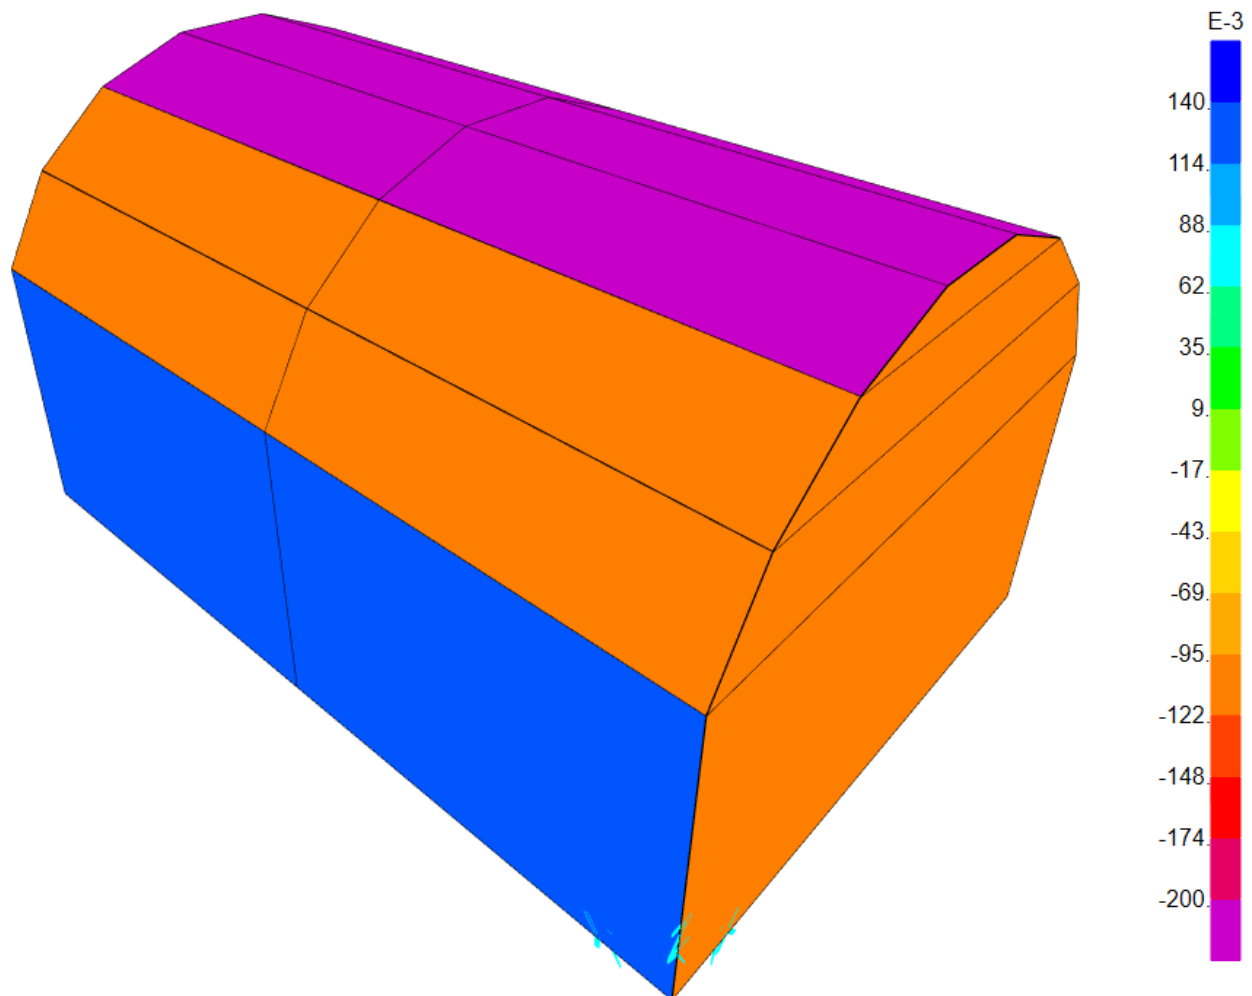


5.1.2 Wind Direction 1 (max)

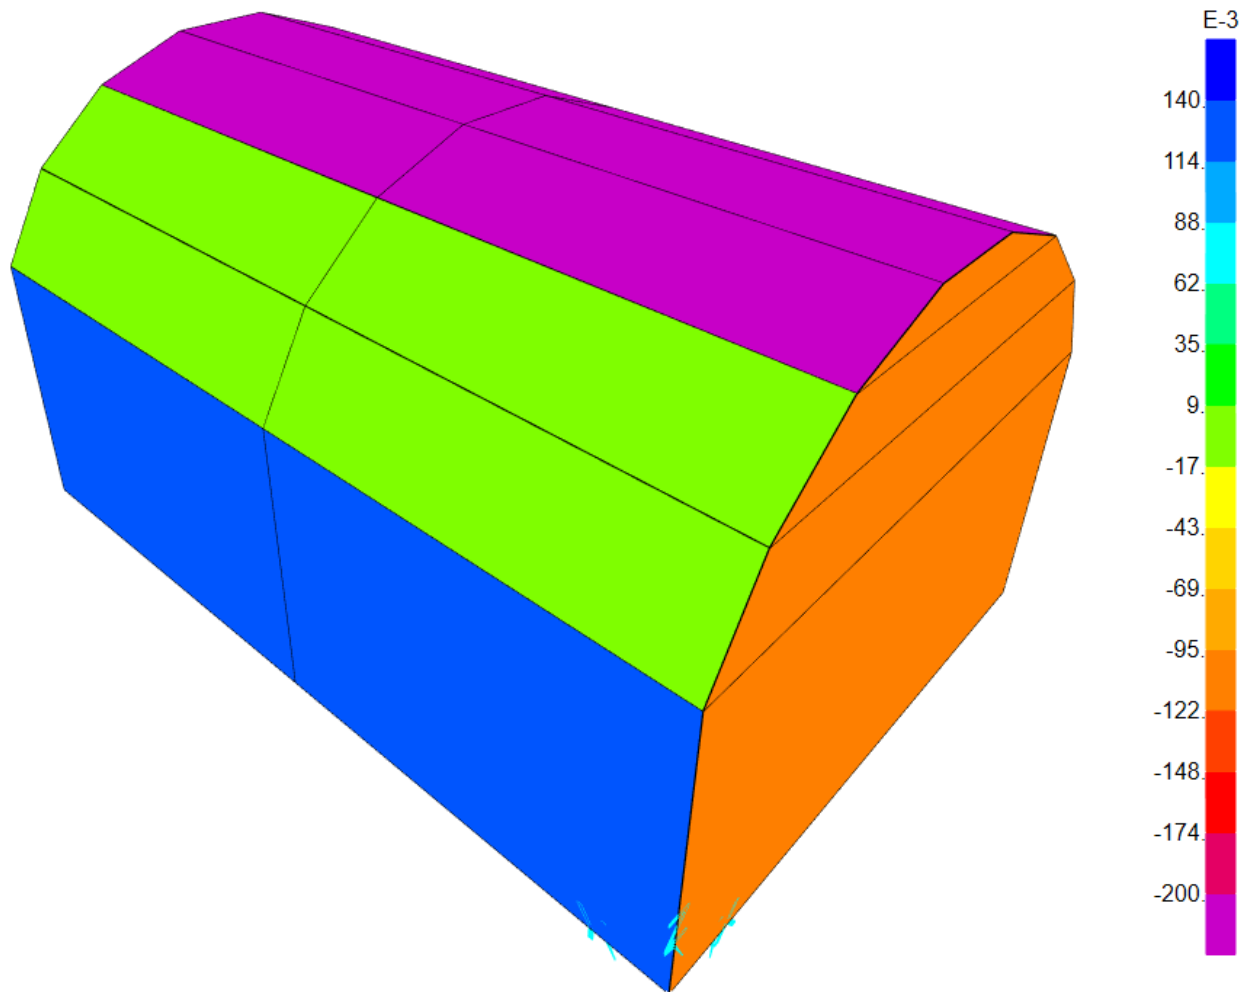


5.1.3 Wind Direction 2 (min)

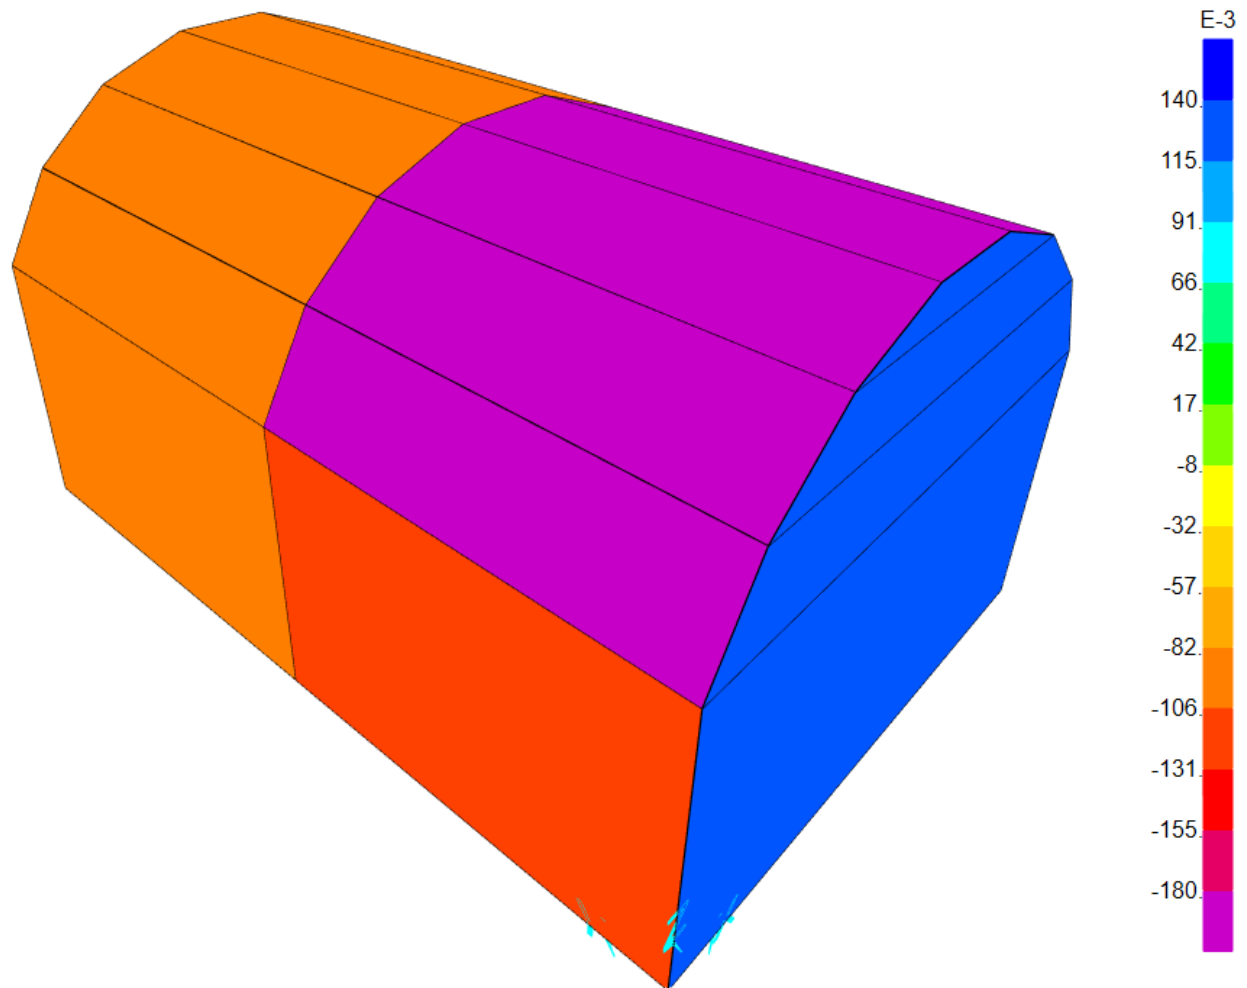


5.1.4 Wind Direction 2 (max)

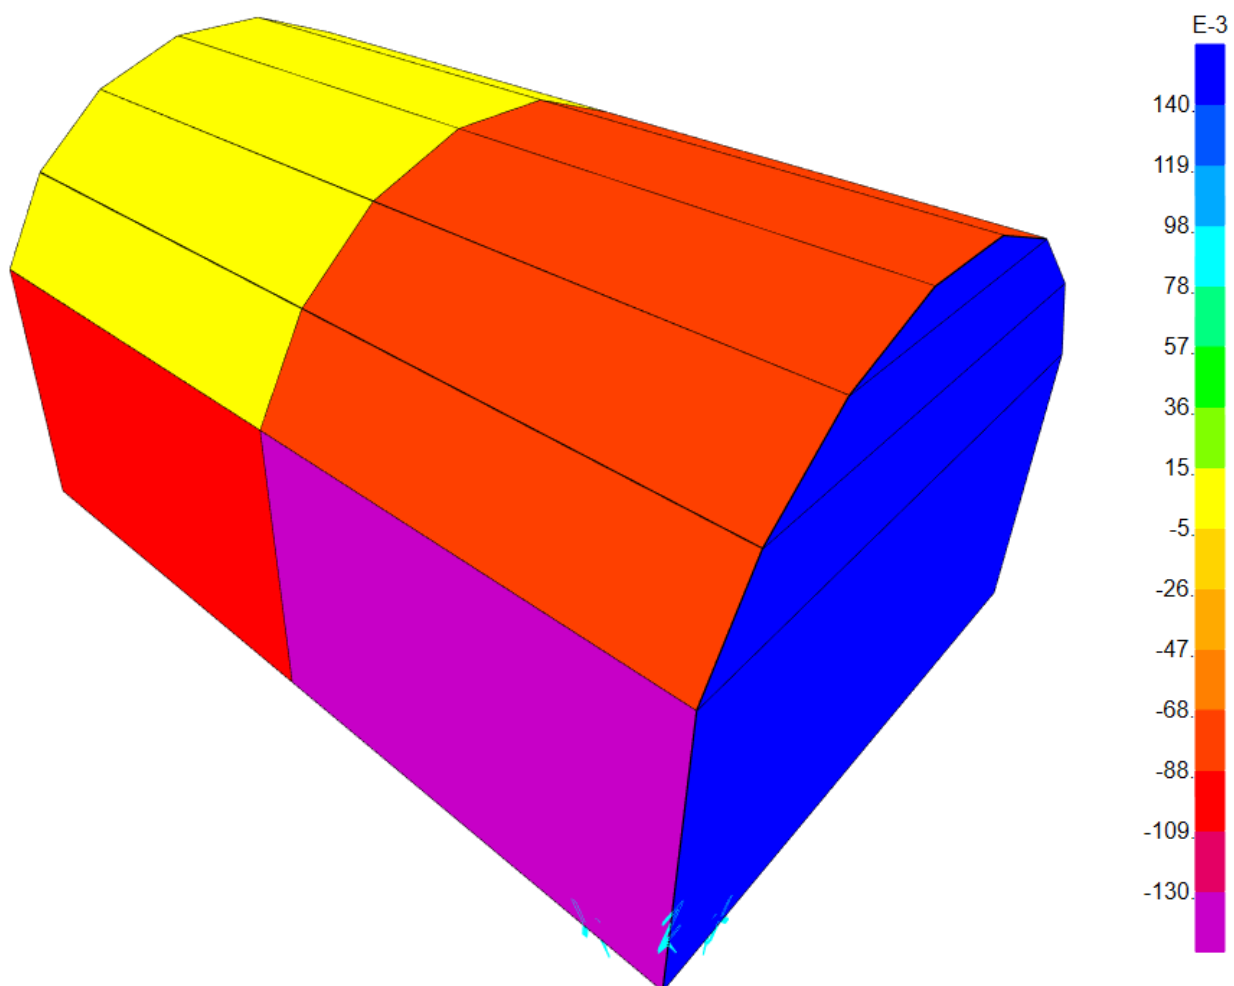

5.1.5 Wind Load Internal Suction ($W_{I,suction}$)

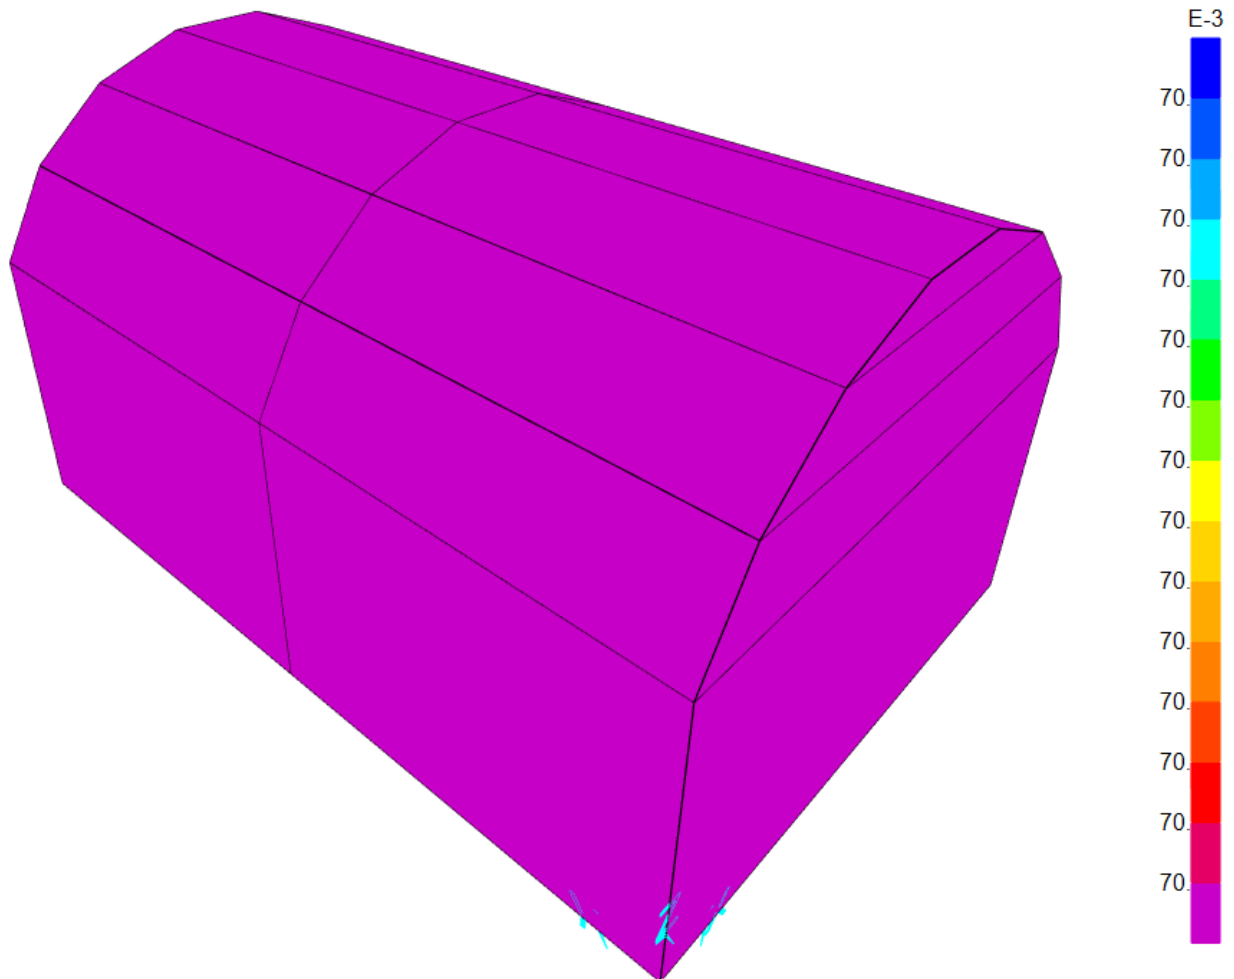


5.1.6 Wind Load Internal Suction ($W_{I,pressure}$)

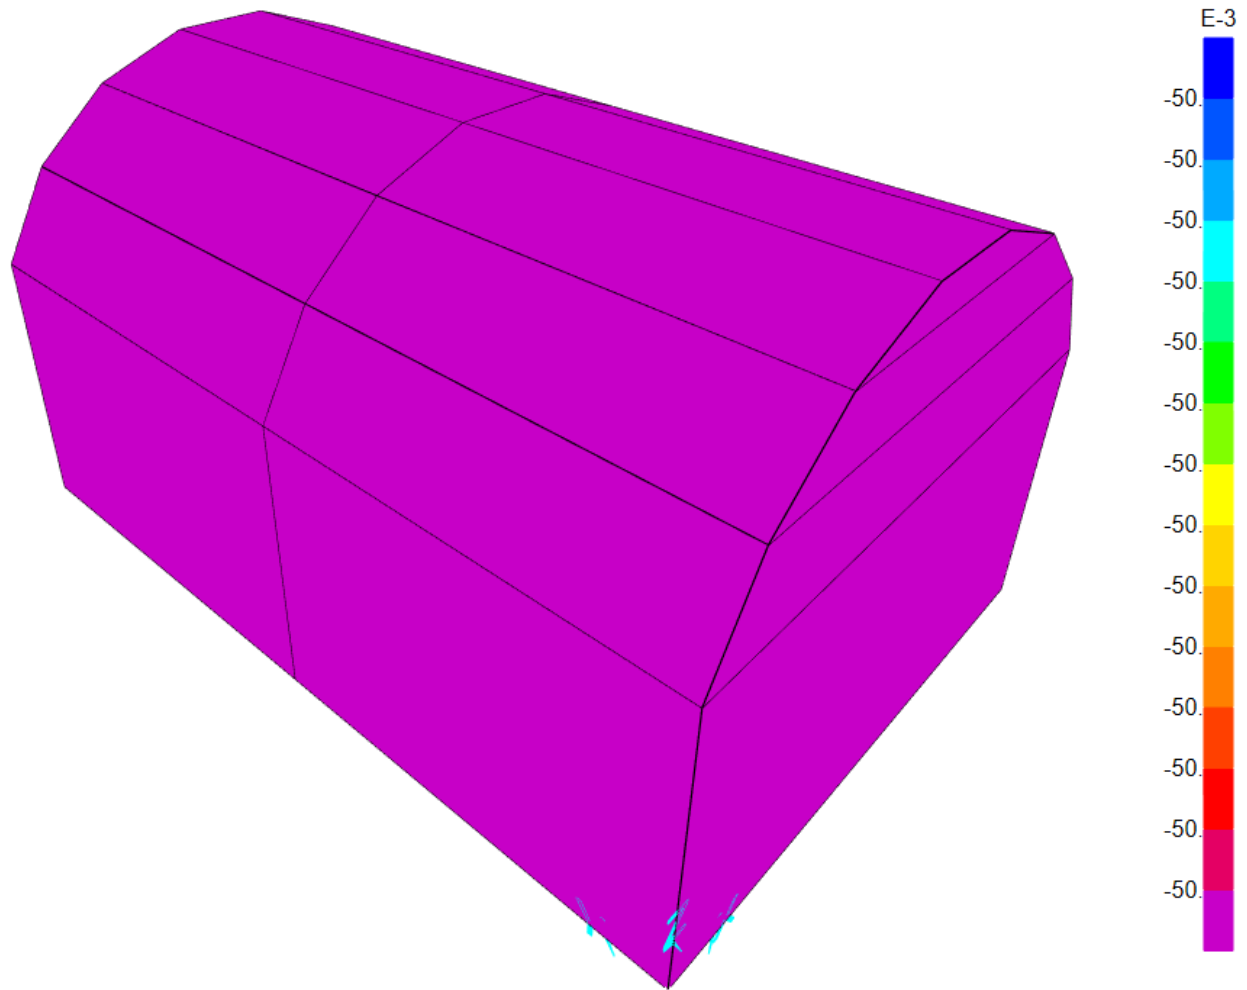


6 Analysis

6.1 3D model

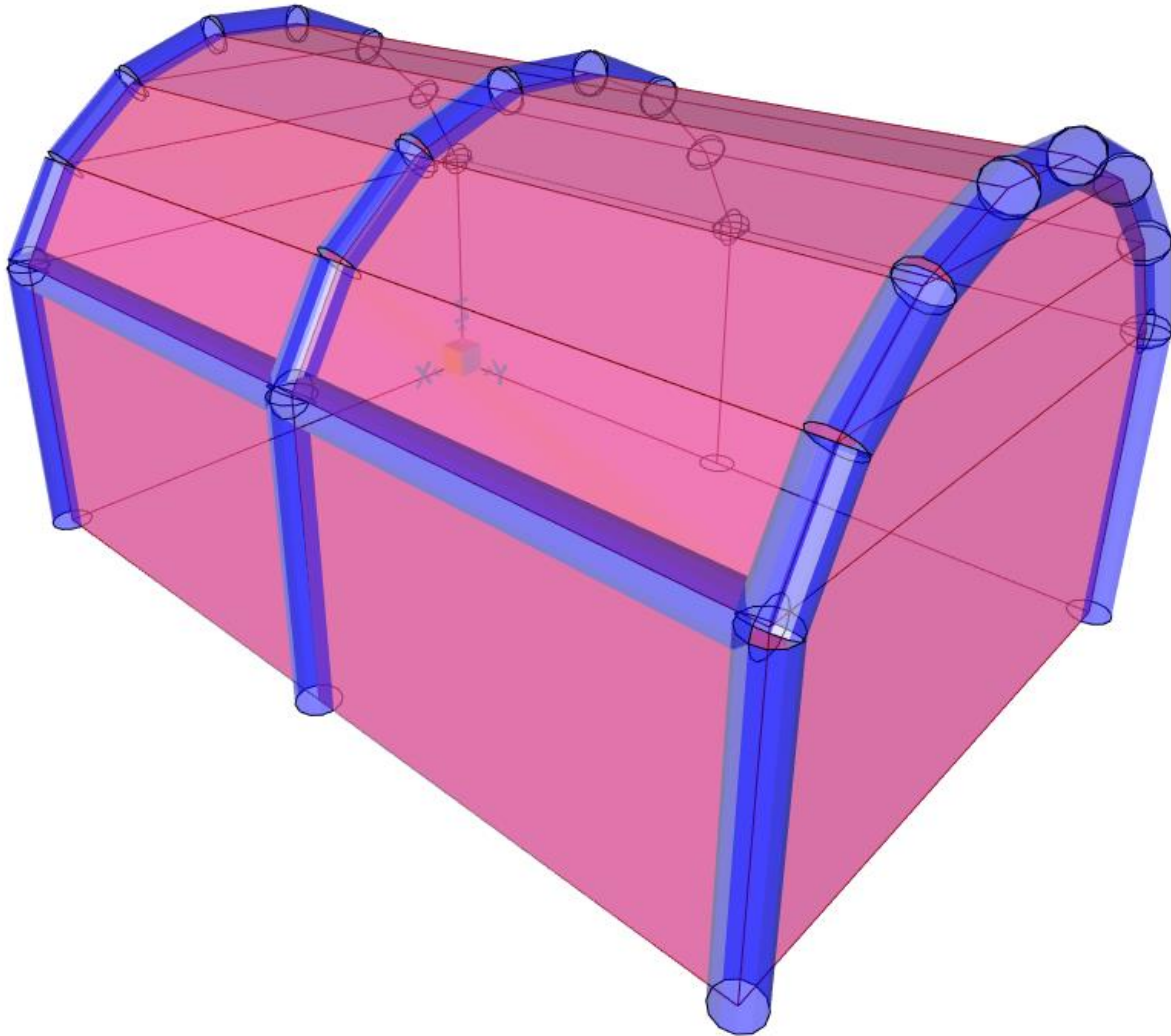

6.2 Results

6.2.1 Maximum Reactions

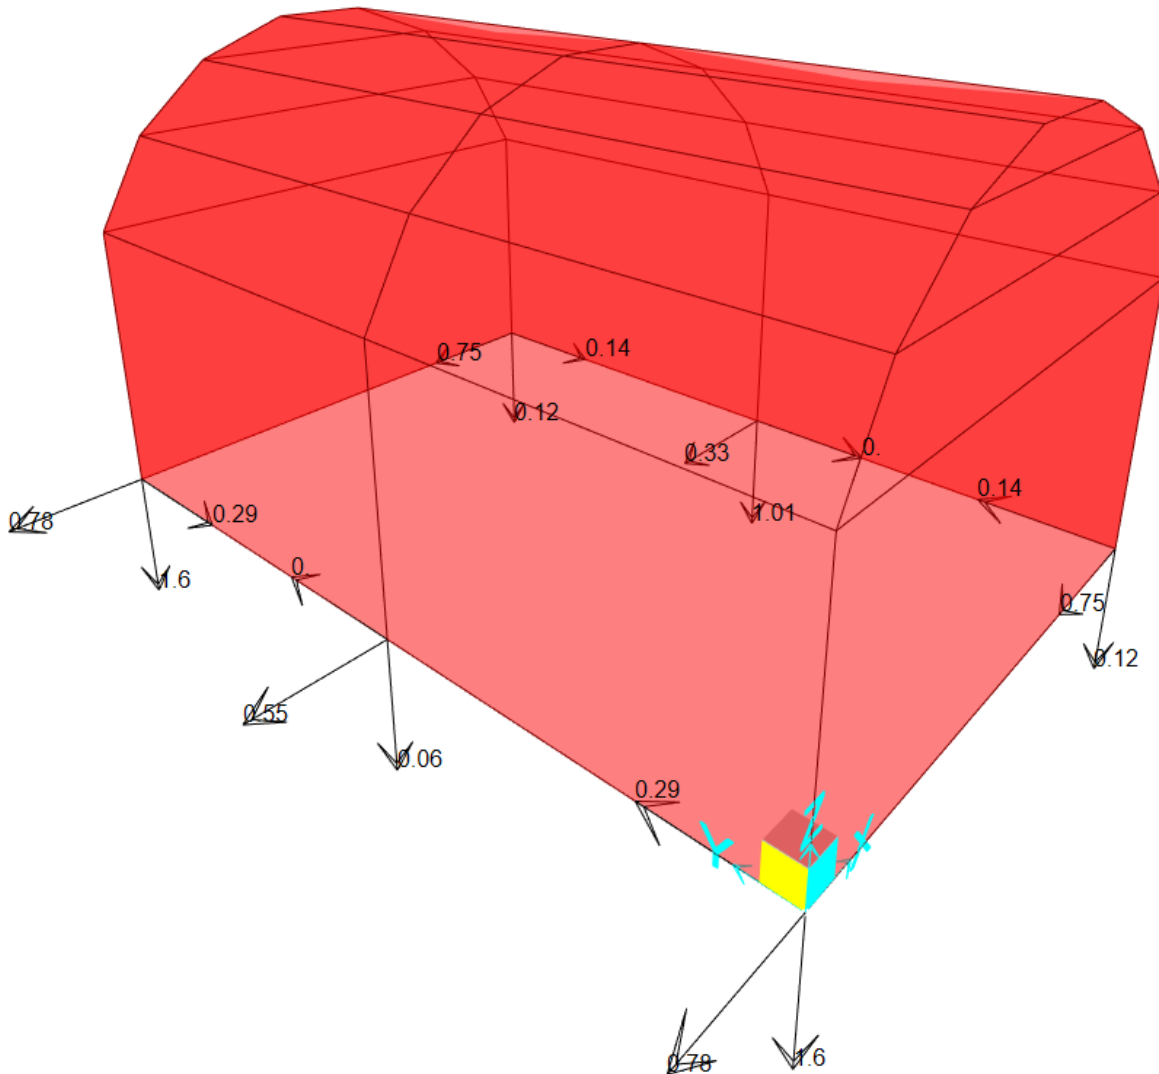

Max. $F_x = 0.78$ kN
 Max. $F_y = 0.73$ kN
 Max. $F_{z, \text{Bearing}} = 0.88$ kN
 Max. $F_{z, \text{uplift}} = 1.6$ kN

7 Holding Down Requirements

Refer table below for holding down weight requirements for various wind speeds

Wind Speed (km/hr)	Wind Speed (m/s)	Weight Per leg (kg)	Total Weigh for 6 legs (kg)
80	22.22	165	990
60	16.67	95	570
40	11.11	55	330

8 Summary and Recommendations

- The 4m x 6m Inflatable Marquee is required to be deflated for forecast winds in excess of 80, 60 & 40km/hr based on provided weights per leg as per Cl.7.
- For uplift due to 80, 60 & 40km/hr wind speeds, holding down weight per leg is required as tabulated in Cl. 7 and shown below.
- Design of fabric is by others.


Wind Speed (km/hr)	Wind Speed (m/s)	Weight Per leg (kg)	Total Weigh for 6 legs (kg)
80	22.22	165	990
60	16.67	95	570
40	11.11	55	330

Yours faithfully,

Prime Consulting Engineers Pty. Ltd.

Kevin Zia, BEng, Meng, MIEAust, CPENG NER

9 Appendix A – Detail Drawings

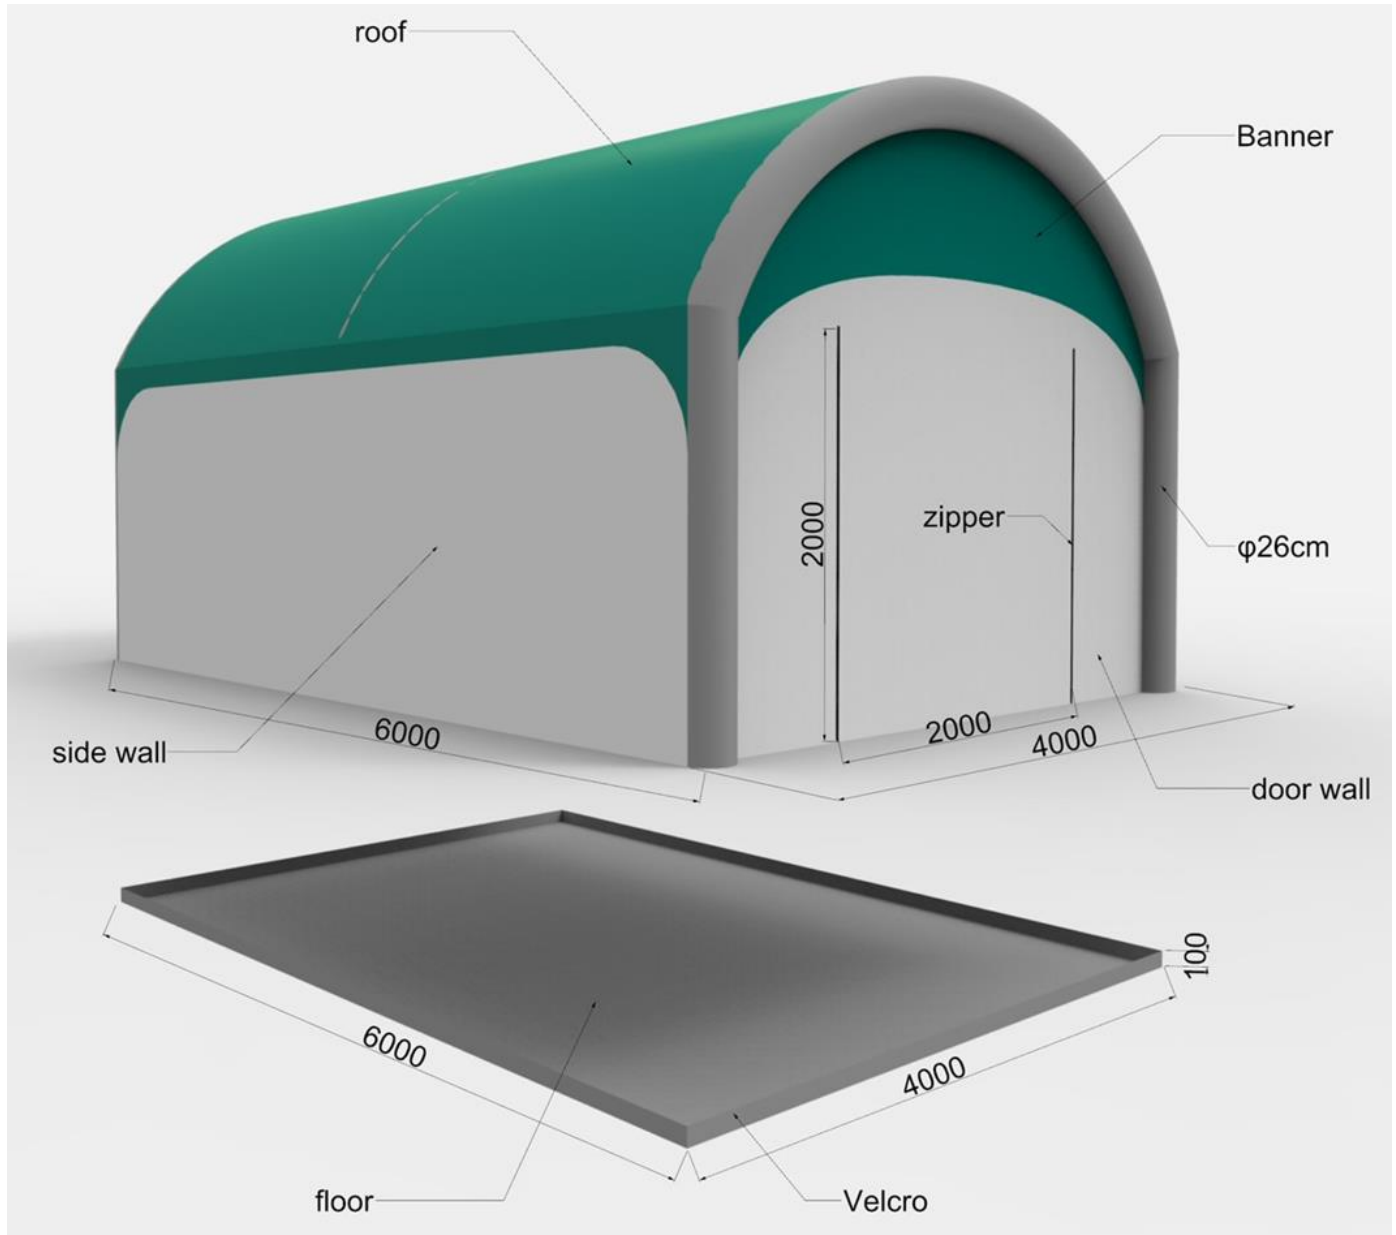

Size: 4m x 6m
Height: 3.4 m
Clearance: 19 m²
Frame Profile: 260 mm Diameter
Weight: 40kg

Size: 5m x 10m
Height: 3.8m
Clearance: 40m
Frame Profile: 330 mm Diameter
Weight: 60kg

Fabric:
400D PU Coated Polyester

Warranty:
TPU Frame: 6 months
Fabric: Polyester
Plain & Printed 1 Year