



Civil & Structural Engineering Design Services Pty. Ltd.

Client: Extreme Marquees Pty Ltd
Project: Design check – 3m × 3m Pavilion Marquees Structure for 60km/hr Wind Speed
Reference: Extreme Marquees Technical Data

Report by: KZ
Checked by: EAB
Date: 22/03/2017

JOB NO: E-11-265231-4



Civil & Structural Engineering Design Services Pty. Ltd.

Table of Contents

1	Introduction.....	3
2	Design Restrictions and Limitations.....	4
3	Specifications.....	5
3.1	General.....	5
3.2	Section Properties.....	6
4	Design Loads.....	6
4.1	Ultimate.....	6
4.2	Load Combinations.....	6
4.2.1	Serviceability	6
4.2.2	Ultimate	6
5	Wind Analysis.....	6
5.1	Parameters	6
5.2	Pressure Coefficients (C_{fig}).....	7
5.2.1	Pressure summary.....	8
5.3	Wind Load Diagrams.....	9
5.3.1	Wind 1(case 1)	9
5.3.2	Wind 1(case 2)	9
5.3.3	Wind 2(Case1)	10
5.3.4	Wind 2(case 2)	10
5.3.5	Max Bending Moment due to critical load combination in major axis	11
5.3.6	Max Bending Moment in minor axis due to critical load combination	11
5.3.7	Max Shear in due to critical load combination.....	12
5.3.8	Max Axial force in upright support and roof beam due to critical load combination.....	12
5.3.9	Max reactions	13
6	Checking Members Based on AS1664.1 ALUMINIUM LSD.....	13
6.1	Upright Support.....	13
6.2	Rafter	17
6.3	Gable Beam.....	21
6.4	Summary Forces	25
7	Summary.....	26
7.1	Conclusions	26
8	Appendix A – Base Anchorage Requirements	27
9	Appendix "B" – Hold Down Method Details.....	28



Civil & Structural Engineering Design Services Pty. Ltd.

1 Introduction

This Certification is the sole property for copyright of Mr. Ted Bennett of Civil & Structural Engineering Design Services Pty. Ltd. and the license holder for the exclusive use of this Certification, Extreme Marquees Pty Ltd.

The following structural drawings and calculations are for the applicable transportable tents supplied by Extreme Marquees Pty Ltd.

The report examines the effect of 3s gust wind of 60 km/hr on 3m x 3m Pavilion Marquees as the worst case scenario.

The relevant Australian Standards AS1170.0:2002 General principles, AS1170.1:2002 Permanent, imposed and other actions and AS1170.2:2011 Wind actions are used. The design check is in accordance with AS/NZS AS1664.1

ALUMINIUM LIMIT STATE DESIGN.



2 Design Restrictions and Limitations

- 2.1 The erected structure is for temporary use only.
- 2.2 It should be noted that if high gust wind speeds are anticipated or forecast in the locality of the tent, the temporary erected structure should be folded.
- 2.3 For forecast winds in excess of **(refer to summary)** the structure should be completely dismantled.
(Please note that the locality squall or gust wind speed is affected by factors such as terrain exposure and site elevations.)
- 2.4 The structure may only be erected in regions with wind classifications no greater than the limits specified on the attached wind analysis.
- 2.5 The wind classifications are based upon category 2 in AS. Considerations have also been made to the regional wind terrain category, topographical location and site shielding from adjacent structures. Please note that in many instances topographical factors such as a location on the crest of a hill or on top of an escarpment may yield a higher wind speed classification than that derived for a higher wind terrain category in a level topographical region. For this reason, particular regard shall be paid to the topographical location of the structure. For localities which do not conform to the standard prescribed descriptions for wind classes as defined above, a qualified Structural Engineer may be employed to determine an appropriate wind class for that the particular site.
- 2.6 The structures in no circumstances shall ever be erected in tropical or severe tropical cyclonic condition.
- 2.7 The tent structure has not been designed to withstand snow and ice loadings such as when erected in alpine regions.
- 2.8 For the projects, where the site conditions approach the design limits, extra consideration should be given to pullout tests of the stakes and professional assessment of the appropriate wind classification for the site.
- 2.9 Design of fabric by others.
- 2.10 **No Fabrics or doors should be used for covering the sides of unbraced Pavilion Marquees due to the lack of bracing within the system and insufficient out-of-plane stiffness of framing.**





3 Specifications

3.1 General

Tent category	
Material	Aluminum 6061 – T6

Size	Model
3m x 3m	Pavilion Marquees

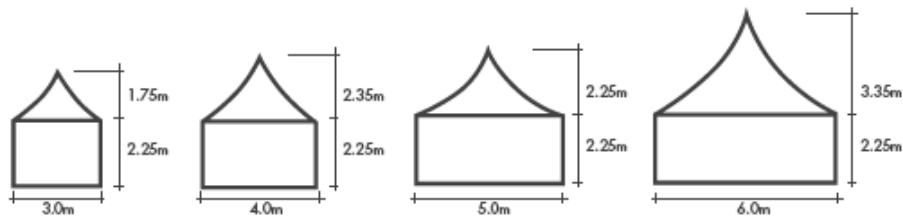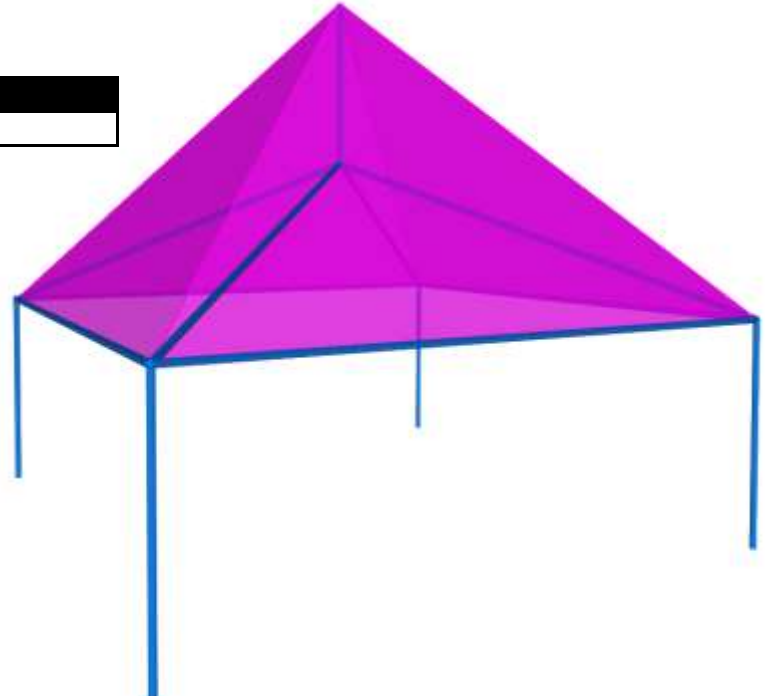

Size	3x3m	4x4m	5x5m	6x6m
Height	4m	4.6m	4.5m	5.6m
Clearance	2.25m			
Roof Tension System	Turn buckle tension system			
Main Profile	Dia. 63mm, 2.5mm Thickness Aluminium			
Feet	Aluminium			
Connectors	Steel			
Framework Material	Aluminium - 6063 T5			
Cover Material	580GSM Imported Belgian PVC			
Engineer Certification	Engineer Structural Certificate, Resistance of Fabrics to Water Penetration Test, Ultra Violet Protection Test, Fire Action Analysis			



Civil & Structural Engineering Design Services Pty. Ltd.

3.2 Section Properties

MEMBER(S)	Section	d	t	y _c	A _g	Z _x	Z _y	S _x	S _y	I _x	I _y	J	r _x	r _y
		mm	mm	mm	mm ²	mm ³	mm ³	mm ³	mm ³	mm ⁴	mm ⁴	mm ⁴	mm	mm
Rafter	D63x2.5	63	2.5	31.5	475.2	6913.5	6913.5	9155.8	9155.8	217774.5	217774.5	435548.9	21.4	21.4
Upright Support	D63x2.5	63	2.5	31.5	475.2	6913.5	6913.5	9155.8	9155.8	217774.5	217774.5	435548.9	21.4	21.4
Gable Beam	D63x2.5	63	2.5	31.5	475.2	6913.5	6913.5	9155.8	9155.8	217774.5	217774.5	435548.9	21.4	21.4

4 Design Loads

4.1 Ultimate

		Distributed load (kPa)	Design load factor (-)	Factored imposed load (kPa)
Live	Q	-	1.5	-
Self weight	G	self weight	1.35, 1.2, 0.9	1.2 self weight, 0.9 self weight
3s 60km/hr gust	W	0.138 C _{fig}	1.0	0.138

4.2 Load Combinations

4.2.1 Serviceability

Gravity = $1.0 \times G$

Wind = $1.0 \times G + 1.0 \times W$

4.2.2 Ultimate

Downward = $1.35 \times G$
= $1.2 \times G + W_u$

Upward = $0.9 \times G + W_u$

5 Wind Analysis

Wind towards surface (+ve), away from surface (-ve)

5.1 Parameters

Terrain category = 2

Site wind speed ($V_{sit,\beta}$) = $V_R M_d (M_{z,cat} M_s M_t)$

$V_R = 16.67 \text{ m/s (60 km/hr)}$

(regional 3 s gust wind speed)

$M_d = 1$



Civil & Structural Engineering Design Services Pty. Ltd.

$$M_s = 1$$

$$M_t = 1$$

$$M_{z,cat} = 0.91$$

$$V_{sit,\beta} = 15.17 \text{ m/s}$$

(Table 4.1(B) AS1170.2)

$$\text{Height of structure (h)} = 3.3 \text{ m}$$

$$\text{Width of structure (w)} = 3 \text{ m}$$

$$\text{Length of structure (l)} = 3 \text{ m}$$

$$\text{Pressure (P)} = 0.5\rho_{air} (V_{sit,\beta})^2 C_{fig} C_{dyn}$$

$$= 0.138C_{fig} \text{ kPa}$$

(mid of peak and eave)

5.2 Pressure Coefficients (C_{fig})

Name	Symbol	Value	Unit	Notes	Ref.
Input					
Importance level		2			Table 3.1 - Table 3.2 (AS1170.0)
Annual probability of exceedance		Temporary			Table 3.3
Regional gust wind speed		60	Km/hr		Table 3.1 (AS1170.2)
Regional gust wind speed	V_R	16.67	m/s		
Wind Direction Multipliers	M_d	1			Table 3.2 (AS1170.2)
Terrain Category Multiplier	$M_{Z,Cat}$	0.91			Table 4.1 (AS1170.2)
Shield Multiplier	M_s	1			4.3 (AS1170.2)
Topographic Multiplier	M_t	1			4.4 (AS1170.2)
Site Wind Speed	$V_{Site,\beta}$	15.17	m/s	$V_{Site,\beta} = V_R * M_d * M_{Z,Cat} * M_s * M_t$	
Pitch	α	45	Deg		
Pitch	α	0.79	rad		
Width	B	3	m		
Length	D	3	m		
Height	Z	3.3	m		
Wind Pressure					
ρ_{air}	ρ	1.2	Kg/m ³		
dynamic response factor	C_{dyn}	1			
Wind Pressure	$\rho * C_{fig}$	0.138	Kg/m ²	$\rho = 0.5\rho_{air} * (V_{des,\beta})^2 * C_{fig} * C_{dyn}$	2.4 (AS1170.2)
WIND DIRECTION 1 & 2					



4. Free Roof

Area Reduction Factor	K_a	1	
local pressure factor	K_l	1	
porous cladding reduction factor	K_p	1	
External Pressure Coefficient MIN	$C_{P,w}$	-0.3	
External Pressure Coefficient MAX	$C_{P,w}$	0.8	
External Pressure Coefficient MIN	$C_{P,l}$	-0.7	
External Pressure Coefficient MAX	$C_{P,l}$	0	
aerodynamic shape factor MIN	$C_{fig,w}$	-0.30	
aerodynamic shape factor MAX	$C_{fig,w}$	0.80	
aerodynamic shape factor MIN	$C_{fig,l}$	-0.70	
aerodynamic shape factor MAX	$C_{fig,l}$	0.00	
Pressure Windward MIN	P	-0.04	kPa
Pressure Windward MAX	P	0.11	kPa
Pressure Leeward MIN	P	-0.10	kPa
Pressure Leeward MAX	P	0.00	kPa

$\alpha = 0^\circ$

D7

5.2.1 Pressure summary

WIND EXTERNAL PRESSURE	Direction 1&2	
	Min (Kpa)	Max (Kpa)
W	-0.041	0.110
L	-0.097	0.000



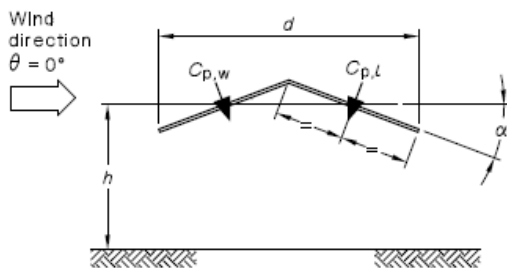


FIGURE D3 PITCHED FREE ROOFS

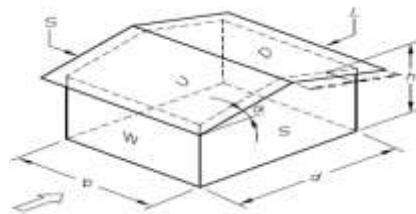

AS1170.2
Direction 1

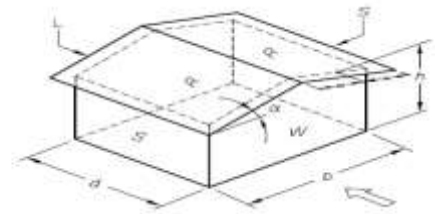


Direction 2




5.3 Wind Load Diagrams

5.3.1 Wind 1(case 1)

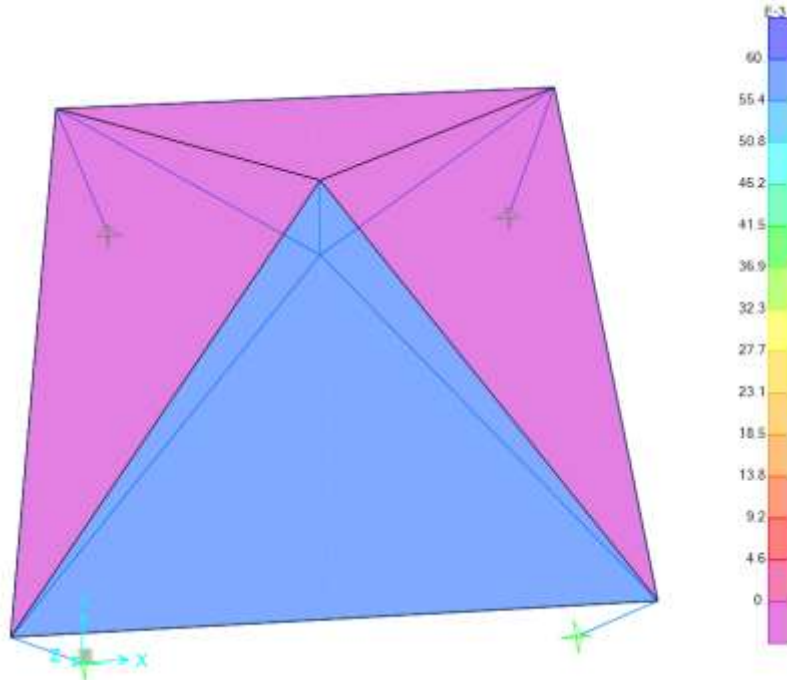


5.3.2 Wind 1(case 2)

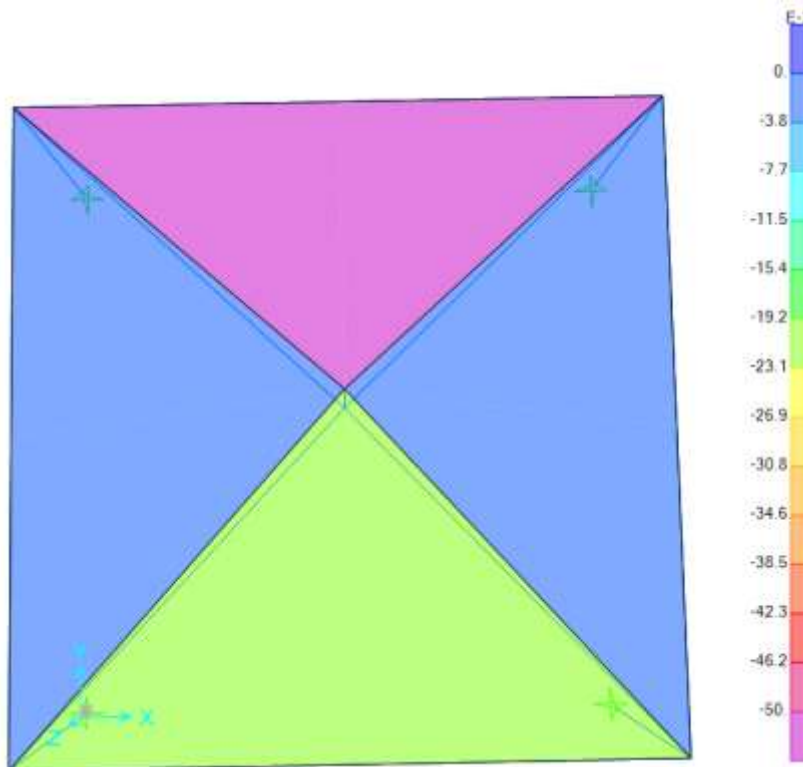




Civil & Structural Engineering Design Services Pty. Ltd.

5.3.3 Wind 2(Case1)

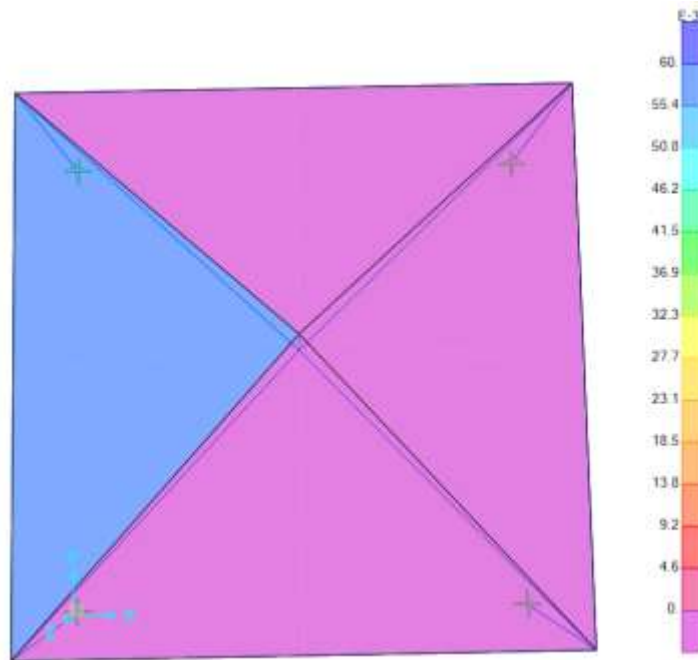


5.3.4 Wind 2(case 2)

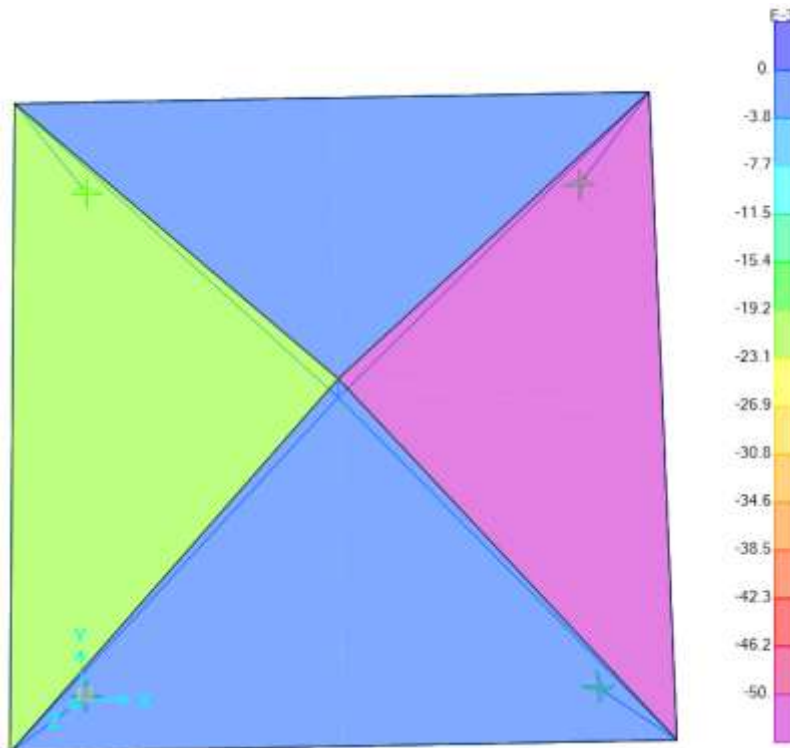


After 3D model analysis, each member is checked based on adverse load combination. In this regard the maximum bending moment, shear and axial force due to adverse load combinations for each member are presented as below:



5.3.5 Max Bending Moment due to critical load combination in major axis

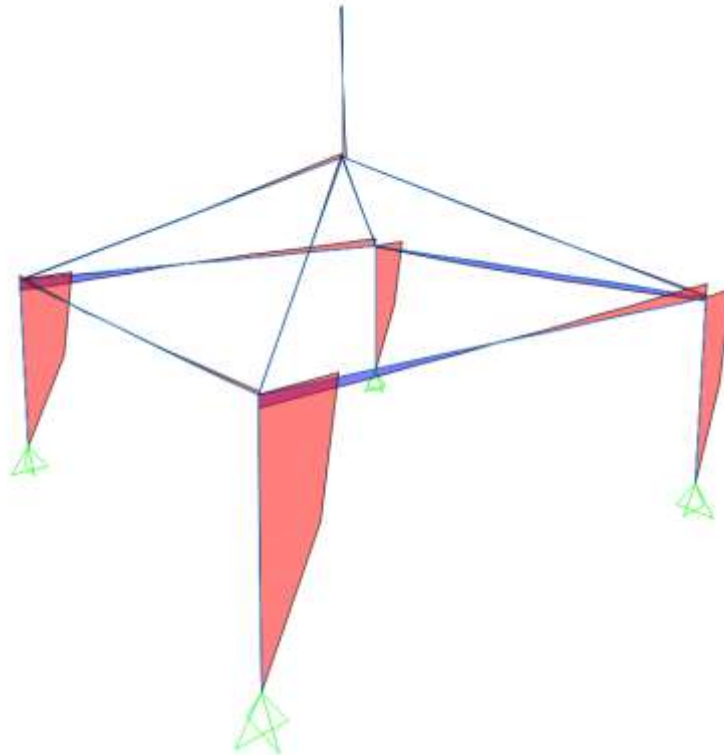


5.3.6 Max Bending Moment in minor axis due to critical load combination

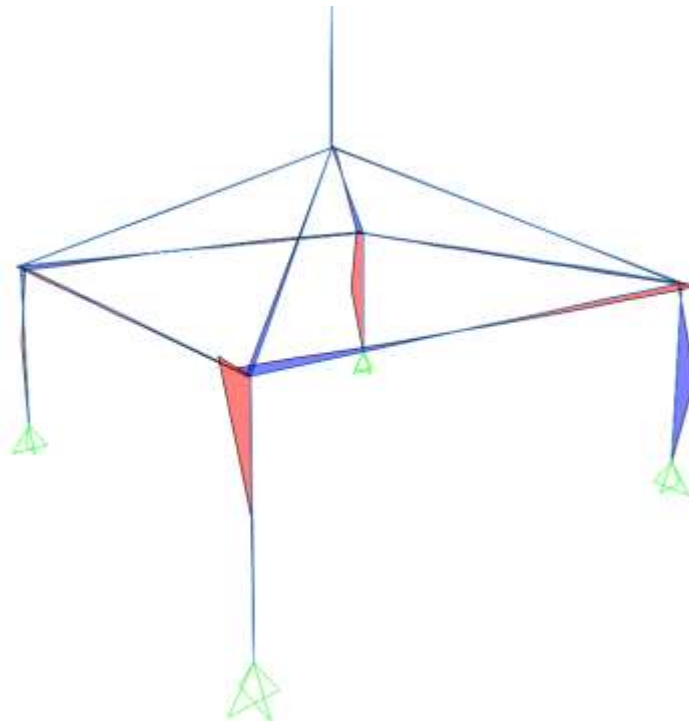




Civil & Structural Engineering Design Services Pty. Ltd.

5.3.7 Max Shear in due to critical load combination

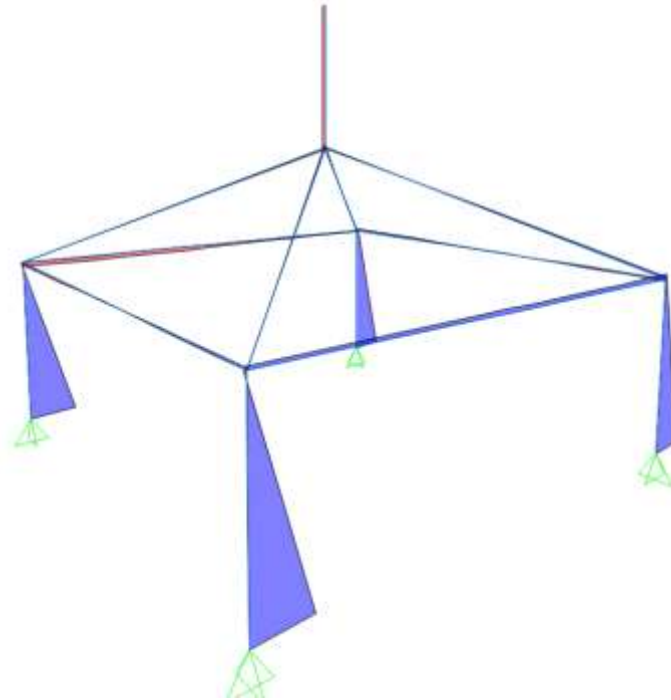


5.3.8 Max Axial force in upright support and roof beam due to critical load combination

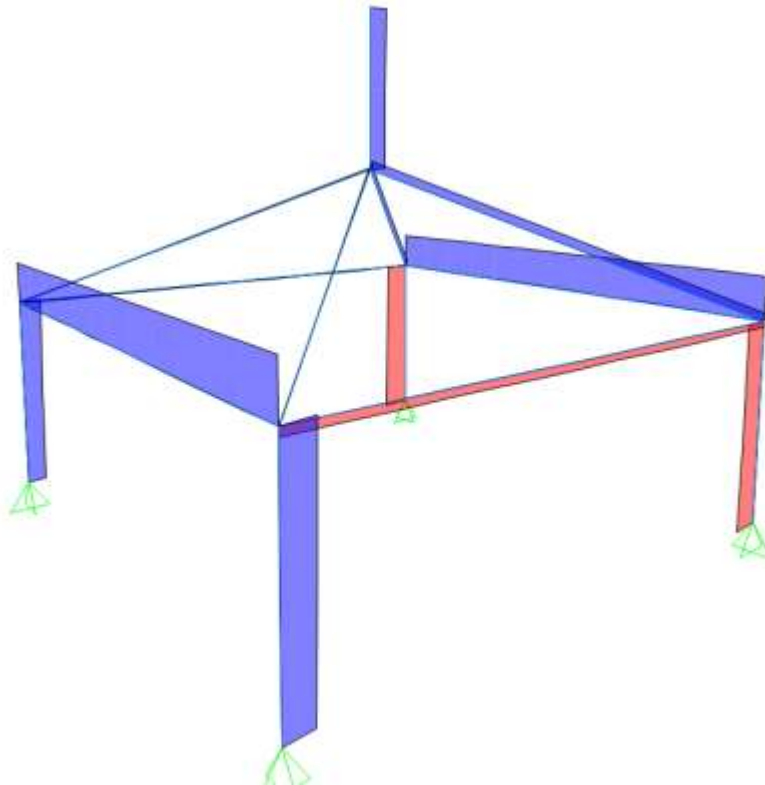



Civil & Structural Engineering Design Services Pty. Ltd.

5.3.9 Max reactions

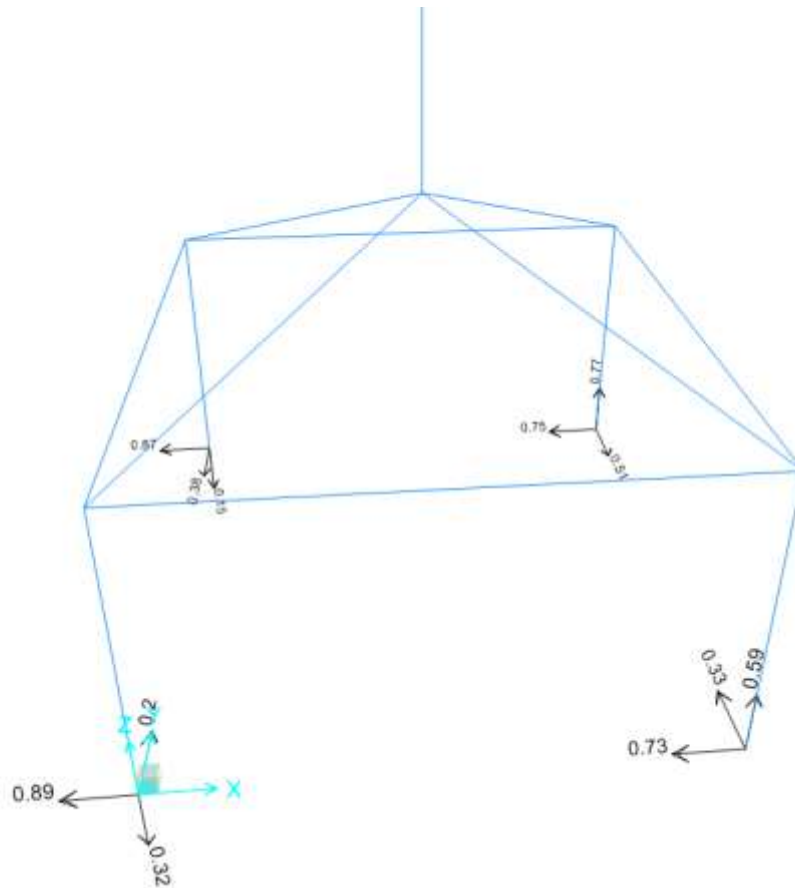

Max Reaction $N^* = 0.91\text{kN}$

6 Checking Members Based on AS1664.1 ALUMINIUM LSD

6.1 Upright Support

NAME	SYMBOL	VALUE	UNIT	NOTES	REF
D63x2.5	Upright Support				
Alloy and temper	6061-T6				AS1664.1
Tension	F_{tu}	= 262	MPa	Ultimate	T3.3(A)
	F_{ty}	= 241	MPa	Yield	
Compression	F_{cy}	= 241	MPa		
Shear	F_{su}	= 165	MPa	Ultimate	
	F_{sy}	= 138	MPa	Yield	
Bearing	F_{bu}	= 551	MPa	Ultimate	
	F_{by}	= 386	MPa	Yield	



Civil & Structural Engineering Design Services Pty. Ltd.

Modulus of elasticity	E	=	70000	MPa	Compressive	
	k_t	=	1.0			T3.4(B)
	k_c	=	1.0			
FEM ANALYSIS RESULTS						
Axial force	P	=	0	kN	compression	
	P	=	0.606	kN	Tension	
In plane moment	M_x	=	0.9187	kNm		
Out of plane moment	M_y	=	0.4713	kNm		
DESIGN STRESSES						
Gross cross section area	A_g	=	475.16589	mm ²		
In-plane elastic section modulus	Z_x	=	6913.4751	mm ³		
Out-of-plane elastic section mod.	Z_y	=	6913.4751	mm ³		
Stress from axial force	f_a	=	P/ A_g			
		=	0.00	MPa	compression	
		=	1.28	MPa	Tension	
Stress from in-plane bending	f_{bx}	=	M_x/Z_x			
		=	132.89	MPa	compression	
Stress from out-of-plane bending	f_{by}	=	M_y/Z_y			
		=	68.17	MPa	compression	
Tension						
3.4.3 Tension in round or oval tubes						3.4.3
	ϕF_L	=	267.87	MPa		
		OR				
	ϕF_L	=	276.15	MPa		
COMPRESSION						
3.4.8 Compression in columns, axial, gross section						
1. General						3.4.8.1
Unsupported length of member	L	=	2250	mm		
Effective length factor	k	=	1			
Radius of gyration about buckling axis (Y)	r_y	=	21.41	mm		
Radius of gyration about buckling axis (X)	r_x	=	21.41	mm		
Slenderness ratio	kLb/r_y	=	105.10			
Slenderness ratio	kL/r_x	=	105.10			



Slenderness parameter	λ	=	1.96		
	D_c^*	=	90.3		
	S_1^*	=	0.33		
	S_2^*	=	1.23		
	ϕ_{cc}	=	0.855		
Factored limit state stress	ϕF_L	=	53.46	MPa	
2. Sections not subject to torsional or torsional-flexural buckling					3.4.8.2
Largest slenderness ratio for flexural buckling	kL/r	=	105.10		
3.4.11 Uniform compression in components of columns, gross section					
Uniform compression in components of columns, gross section - curved plates with both edges, walls of round or oval tube					3.4.11
					T3.3(D)
mid-thickness radius of round tubular column or maximum mid-thickness radius	R_m	=	30.25		
	t	=	2.5	mm	
Slenderness	R_m/t	=	12.1		
Limit 1	S_1	=	0.24		
Limit 2	S_2	=	672.46		
Factored limit state stress	ϕF_L	=	221.14	MPa	
Most adverse compressive limit state stress	F_a	=	53.46	MPa	
Most adverse tensile limit state stress	F_a	=	267.87	MPa	
Most adverse compressive & Tensile capacity factor	f_a/F_a	=	0.00		PASS
BENDING - IN-PLANE					
3.4.13 Compression in beams, extreme fibre, gross section round or oval tubes					
Unbraced length for bending	L_b	=	2250	mm	
Second moment of area (weak axis)	I_y	=	2.18E+05	mm ⁴	
Torsion modulus	J	=	4.36E+05	mm ³	
Elastic section modulus	Z	=	6913.4751	mm ³	
	R_b/t	=	12.10		



Civil & Structural Engineering Design Services Pty. Ltd.

Limit 1	S_1	=	44.07		
Limit 2	S_2	=	78.23		
Factored limit state stress	ϕF_L	=	267.87	MPa	3.4.13
3.4.18 Compression in components of beams - curved plates with both edges supported					
	k_1	=	0.5		T3.3(D)
	k_2	=	2.04		T3.3(D)
mid-thickness radius of round tubular column or maximum mid-thickness radius	R_b	=	30.25	mm	
	t	=	2.5	mm	
Slenderness	R_b/t	=	12.1		
Limit 1	S_1	=	2.75		
Limit 2	S_2	=	78.23		
Factored limit state stress	ϕF_L	=	221.14	MPa	
Most adverse in-plane bending limit state stress	F_{bx}	=	221.14	MPa	
Most adverse in-plane bending capacity factor	f_{bx}/F_{bx}	=	0.60		PASS
BENDING - OUT-OF-PLANE					
<i>NOTE: Limit state stresses, ϕF_L are the same for out-of-plane bending (doubly symmetric section)</i>					
Factored limit state stress	ϕF_L	=	221.14	MPa	
Most adverse out-of-plane bending limit state stress	F_{by}	=	221.14	MPa	
Most adverse out-of-plane bending capacity factor	f_{by}/F_{by}	=	0.31		PASS
COMBINED ACTIONS					
4.1.1 Combined compression and bending					
	F_a	=	53.46	MPa	4.1.1
	F_{ao}	=	221.14	MPa	3.4.11
	F_{bx}	=	221.14	MPa	3.4.18
	F_{by}	=	221.14	MPa	3.4.18



Civil & Structural Engineering Design Services Pty. Ltd.

		$f_a/F_a = 0.005$		
Check:		$f_a/F_a + f_{bx}/F_{bx} + f_{by}/F_{by} \leq 1.0$		4.1.1
i.e.		$0.91 \leq 1.0$	PASS	
SHEAR				
3.4.24 Shear in webs (Major Axis)				3.4.24
	R	=	31.5 mm	
	t	=	2.5 mm	
Equivalent h/t	h/t	=	41.08	
Limit 1	S ₁	=	29.01	
Limit 2	S ₂	=	59.31	
Factored limit state stress	ϕF_L	=	118.88 MPa	
Stress From Shear force	f_{sx}	=	V/A _w	
		=	0.27 MPa	
3.4.25 Shear in webs (Minor Axis)				3.4.25
Clear web height	R	=	31.5 mm	
	t	=	2.5 mm	
Equivalent h/t	h/t	=	41.08	
Factored limit state stress	ϕF_L	=	118.88 MPa	
Stress From Shear force	f_{sy}	=	V/A _w	
		=	0.33 MPa	

6.2 Rafter

NAME	SYMBOL	VALUE	UNIT	NOTES	REF
D63x2.5	Rafter				
Alloy and temper	6061-T6				AS1664.1
Tension	F_{tu}	=	262 MPa	Ultimate	T3.3(A)
	F_{ty}	=	241 MPa	Yield	
Compression	F_{cy}	=	241 MPa		
Shear	F_{su}	=	165 MPa	Ultimate	
	F_{sy}	=	138 MPa	Yield	
Bearing	F_{bu}	=	551 MPa	Ultimate	
	F_{by}	=	386 MPa	Yield	
Modulus of elasticity	E	=	70000 MPa	Compressive	



Civil & Structural Engineering Design Services Pty. Ltd.

	k_t	=	1.0			
	k_c	=	1.0			T3.4(B)
FEM ANALYSIS RESULTS						
Axial force	P	=	0	kN	compression	
	P	=	0.06	kN	Tension	
In plane moment	M_x	=	0.0664	kNm		
Out of plane moment	M_y	=	0.1231	kNm		
DESIGN STRESSES						
Gross cross section area	A_g	=	475.1658	mm ²		
			9			
In-plane elastic section modulus	Z_x	=	6913.475	mm ³		
			1			
Out-of-plane elastic section mod.	Z_y	=	6913.475	mm ³		
			1			
Stress from axial force	f_a	=	P/A_g			
		=	0.00	MPa	compression	
		=	0.13	MPa	Tension	
Stress from in-plane bending	f_{bx}	=	M_x/Z_x			
		=	9.60	MPa	compression	
Stress from out-of-plane bending	f_{by}	=	M_y/Z_y			
		=	17.81	MPa	compression	
Tension						
3.4.3 Tension in rectangular tubes						
	ϕF_L	=	267.87	MPa		3.4.3
		O				
		R				
	ϕF_L	=	276.15	MPa		
COMPRESSION						
3.4.8 Compression in columns, axial, gross section						
1. General						
Unsupported length of member	L	=	3000	mm		3.4.8.1
Effective length factor	k	=	1			
Radius of gyration about buckling axis (Y)	r_y	=	21.41	mm		
Radius of gyration about buckling axis (X)	r_x	=	21.41	mm		
Slenderness ratio	kLb/r_y	=	140.13			
Slenderness ratio	kL/r_x	=	140.13			



Civil & Structural Engineering Design Services Pty. Ltd.

Slenderness parameter	λ	=	2.617		
	D_c^*	=	90.3		
	S_1^*	=	0.33		
	S_2^*	=	1.23		
	ϕ_{cc}	=	0.946		
Factored limit state stress	ϕF_L	=	33.30	MPa	
2. Sections not subject to torsional or torsional-flexural buckling					3.4.8.2
Largest slenderness ratio for flexural buckling	kL/r	=	140.13		
3.4.11 Uniform compression in components of columns, gross section - flat plates					
Uniform compression in components of columns, gross section - curved plates with both edges, walls of round or oval tube					3.4.11
	k_1	=	0.35		T3.3(D)
mid-thickness radius of round tubular column or maximum mid-thickness radius	R_m	=	30.25		
	t	=	2.5	mm	
Slenderness	R_m/t	=	12.1		
Limit 1	S_1	=	0.24		
Limit 2	S_2	=	672.46		
Factored limit state stress	ϕF_L	=	229.63	MPa	
Most adverse compressive limit state stress	F_a	=	33.30	MPa	
Most adverse tensile limit state stress	F_a	=	267.87	MPa	
Most adverse compressive & Tensile capacity factor	f_a/F_a	=	0.00		PASS
BENDING - IN-PLANE					
3.4.13 Compression in beams, extreme fibre, gross section round or oval tubes					
Unbraced length for bending	L_b	=	3000	mm	
Second moment of area (weak axis)	I_y	=	2.18E+05	mm ⁴	
Torsion modulus	J	=	4.36E+05	mm ³	
Elastic section modulus	Z	=	6913.475	mm ³	
	R_b/t	=	12.10		



Civil & Structural Engineering Design Services Pty. Ltd.

Limit 1	S_1	=	44.07		
Limit 2	S_2	=	78.23		
Factored limit state stress	ϕF_L	=	267.87	MPa	3.4.13
3.4.18 <i>Compression in components of beams - curved plates with both edges supported</i>					
	k_1	=	0.5		T3.3(D)
	k_2	=	2.04		T3.3(D)
mid-thickness radius of round tubular column or maximum mid-thickness radius	R_b	=	30.25	mm	
	t	=	2.5	mm	
Slenderness	R_b/t	=	12.1		
Limit 1	S_1	=	2.75		
Limit 2	S_2	=	78.23		
Factored limit state stress	ϕF_L	=	221.14	MPa	
Most adverse in-plane bending limit state stress	F_{bx}	=	221.14	MPa	
Most adverse in-plane bending capacity factor	f_{bx}/F_{bx}	=	0.04		PASS
BENDING - OUT-OF-PLANE					
<i>NOTE: Limit state stresses, ϕF_L are the same for out-of-plane bending (doubly symmetric section)</i>					
Factored limit state stress	ϕF_L	=	221.14	MPa	
Most adverse out-of-plane bending limit state stress	F_{by}	=	221.14	MPa	
Most adverse out-of-plane bending capacity factor	f_{by}/F_{by}	=	0.08		PASS
COMBINED ACTIONS					
4.1.1 <i>Combined compression and bending</i>					
	F_a	=	33.30	MPa	4.1.1
	F_{ao}	=	229.63	MPa	3.4.11
	F_{bx}	=	221.14	MPa	3.4.18
	F_{by}	=	221.14	MPa	3.4.18
	f_a/F_a	=	0.000		



Civil & Structural Engineering Design Services Pty. Ltd.

Check: $f_a/F_a + f_{bx}/F_{bx} + f_{by}/F_{by} \leq 1.0$			4.1.1
i.e.	0.12	$\leq$ 1.0	PASS
SHEAR			
3.4.24 Shear in webs (Major Axis)			3.4.24
	R	= 31.5 mm	
	t	= 2.5 mm	
Equivalent h/t	h/t	= 44.14	
Limit 1	S ₁	= 29.01	
Limit 2	S ₂	= 59.31	
Factored limit state stress	ϕF_L	= 115.78 MPa	
Stress From Shear force	f_{sx}	= V/A _w	
		0.27 MPa	
3.4.25 Shear in webs (Minor Axis)			3.4.24
Clear web height	R	= 31.5 mm	
	t	= 2.5 mm	
Equivalent h/t	h/t	= 44.14	
Factored limit state stress	ϕF_L	= 115.78 MPa	
Stress From Shear force	f_{sy}	= V/A _w	
		0.33 MPa	

6.3 Gable Beam

NAME	SYMBOL	VALUE	UNIT	NOTES	REF
D63x2.9	Gable Beam				
Alloy and temper	6061-T6				AS1664.1
Tension	F _{tu}	= 262	MPa	Ultimate	T3.3(A)
	F _{ty}	= 241	MPa	Yield	
Compression	F _{cy}	= 241	MPa		
Shear	F _{su}	= 165	MPa	Ultimate	
	F _{sy}	= 138	MPa	Yield	
Bearing	F _{bu}	= 551	MPa	Ultimate	
	F _{by}	= 386	MPa	Yield	
Modulus of elasticity	E	= 70000	MPa	Compressive	
	k _t	= 1.0			T3.4(B)



Civil & Structural Engineering Design Services Pty. Ltd.

	k_c	=	1.0		
FEM ANALYSIS RESULTS					
Axial force	P	=	0.047 kN	compression	
	P	=	0 kN	Tension	
In plane moment	M_x	=	0.2844 kNm		
Out of plane moment	M_y	=	0.2743 kNm		
DESIGN STRESSES					
Gross cross section area	A_g	=	475.16589 mm ²		
In-plane elastic section modulus	Z_x	=	6913.4751 mm ³		
Out-of-plane elastic section mod.	Z_y	=	6913.4751 mm ³		
Stress from axial force	f_a	=	P/A_g	compression	
		=	0.10 MPa	Tension	
		=	0.00 MPa		
Stress from in-plane bending	f_{bx}	=	M_x/Z_x	compression	
		=	41.14 MPa		
Stress from out-of-plane bending	f_{by}	=	M_y/Z_y	compression	
		=	39.68 MPa		
Tension					
3.4.3 Tension in rectangular tubes					3.4.3
	ϕF_L	=	267.87 MPa		
		OR			
	ϕF_L	=	276.15 MPa		
COMPRESSION					
3.4.8 Compression in columns, axial, gross section					
1. General					3.4.8.1
Unsupported length of member	L	=	4000 mm		
Effective length factor	k	=	1		
Radius of gyration about buckling axis (Y)	r_y	=	21.41 mm		
Radius of gyration about buckling axis (X)	r_x	=	21.41 mm		
Slenderness ratio	kLb/r_y	=	186.84		
Slenderness ratio	kL/r_x	=	186.84		
Slenderness parameter	λ	=	3.49		
	D_c^*	=	90.3		



Civil & Structural Engineering Design Services Pty. Ltd.

	S_1^*	=	0.33		
	S_2^*	=	1.23		
	ϕ_{cc}	=	0.950		
Factored limit state stress	ϕF_L	=	18.80	MPa	
<i>2. Sections not subject to torsional or torsional-flexural buckling</i>					3.4.8.2
Largest slenderness ratio for flexural buckling	kL/r	=	186.84		
3.4.11 <i>Uniform compression in components of columns, gross section - flat plates</i>					
<i>Uniform compression in components of columns, gross section - curved plates with both edges, walls of round or oval tube</i>					3.4.11
	k_1	=	0.35		T3.3(D)
mid-thickness radius of round tubular column or maximum mid-thickness radius	R_m	=	30.25		
	t	=	2.5	mm	
Slenderness	R_m/t	=	12.1		
Limit 1	S_1	=	0.24		
Limit 2	S_2	=	672.46		
Factored limit state stress	ϕF_L	=	229.63	MPa	
Most adverse compressive limit state stress	F_a	=	18.80	MPa	
Most adverse tensile limit state stress	F_a	=	267.87	MPa	
Most adverse compressive & Tensile capacity factor	f_a/F_a	=	0.01		PASS
BENDING - IN-PLANE					
3.4.13 <i>Compression in beams, extreme fibre, gross section round or oval tubes</i>					
Unbraced length for bending	L_b	=	4000	mm	
Second moment of area (weak axis)	I_y	=	217774.47	mm ⁴	
Torsion modulus	J	=	435548.93	mm ³	
Elastic section modulus	Z	=	6913.4751	mm ³	
	R_b/t	=	12.10		
Limit 1	S_1	=	44.07		



Civil & Structural Engineering Design Services Pty. Ltd.

Limit 2	S_2	=	78.23		
Factored limit state stress	ϕF_L	=	267.87	MPa	3.4.13
3.4.18 <i>Compression in components of beams - curved plates with both edges supported</i>					
	k_1	=	0.5		T3.3(D)
	k_2	=	2.04		T3.3(D)
mid-thickness radius of round tubular column or maximum mid-thickness radius	R_b	=	30.25	mm	
	t	=	2.5	mm	
Slenderness	R_b/t	=	12.1		
Limit 1	S_1	=	2.75		
Limit 2	S_2	=	78.23		
Factored limit state stress	ϕF_L	=	221.14	MPa	
Most adverse in-plane bending limit state stress	F_{bx}	=	221.14	MPa	
Most adverse in-plane bending capacity factor	f_{bx}/F_{bx}	=	0.19		PASS
BENDING - OUT-OF-PLANE					
<i>NOTE: Limit state stresses, ϕF_L are the same for out-of-plane bending (doubly symmetric section)</i>					
Factored limit state stress	ϕF_L	=	221.14	MPa	
Most adverse out-of-plane bending limit state stress	F_{by}	=	221.14	MPa	
Most adverse out-of-plane bending capacity factor	f_{by}/F_{by}	=	0.18		PASS
COMBINED ACTIONS					
4.1.1 <i>Combined compression and bending</i>					
	F_a	=	18.80	MPa	4.1.1
	F_{ao}	=	229.63	MPa	3.4.11
	F_{bx}	=	221.14	MPa	3.4.18
	F_{by}	=	221.14	MPa	3.4.18



Civil & Structural Engineering Design Services Pty. Ltd.

		$f_a/F_a = 0.005$		
Check:		$f_a/F_a + f_{bx}/F_{bx} + f_{by}/F_{by} \leq 1.0$		4.1.1
i.e.		$0.37 \leq 1.0$	PASS	
SHEAR				
3.4.24 Shear in webs (Major Axis)				3.4.24
	R	=	31.5 mm	
	t	=	2.5 mm	
Equivalent h/t	h/t	=	47.43	
Limit 1	S ₁	=	29.01	
Limit 2	S ₂	=	59.31	
Factored limit state stress	ϕF_L	=	112.45 MPa	
Stress From Shear force	f_{sx}	=	V/A_w	
		=	0.27 MPa	
3.4.25 Shear in webs (Minor Axis)				3.4.25
Clear web height	R	=	31.5 mm	
	t	=	2.5 mm	
Equivalent h/t	h/t	=	47.43	
Factored limit state stress	ϕF_L	=	112.45 MPa	
Stress From Shear force	f_{sy}	=	V/A_w	
		=	0.33 MPa	

6.4 Summary Forces

MEMBER(S)	Section	d	t	V _x	V _y	P (Axial) Negative -> Compression Positive -> Tension	M _x	M _y
		mm	mm	kN	kN	kN	kN.m	kN.m
Rafter	D63x2.5	63	2.5	0.063	-0.079	0.06	-0.0664	0.1231
Upright Support	D63x2.5	63	2.5	-0.06	0.648	0.606	-0.9187	-0.4713
Gable Beam	D63x2.9	63	2.5	0.214	0.192	-0.047	-0.2844	-0.2743



Civil & Structural Engineering Design Services Pty. Ltd.

7 Summary

7.1 Conclusions

- a. The 3m x 3m Pavilion Marquees as specified has been analyzed with a conclusion that it has the capacity to withstand wind speeds up to and including **60km/hr**.
- b. For forecast winds in excess of **60km/hr** – the structure should be completely dismantled.
- c. For uplift due to 60km/hr, 1.4 kN (140kg) holding down weight/per leg for upright support is required.
- d. The bearing pressure of soil should be clarified and checked by an engineer prior to any construction for considering foundation and base plate.
- e. **No Fabrics or doors should be used for covering the sides of unbraced Pavilion Marquees due to the lack of bracing within the system and insufficient out-of-plane stiffness of framing.**

Yours faithfully,

E.A. Bennett M.I.E. Aust. NPER 198230



Civil & Structural Engineering Design Services Pty. Ltd.

8 Appendix A – Base Anchorage Requirements

3m x 3m Pavilion Marquees:

Tent Span	Sile Type	Required Weight Per Leg
3 m	A	140kg
	B	140kg
	C	140kg
	D	140kg
	E	140kg

Definition of Soil Types:

Type A : Loose sand such as dunal sand. Uncompacted site filling may also be included in this soil type.

Type B : Medium to stiff clays or silty clays

Type C: Moderately compact sand or gravel eg. of alluvial origin.

Type D : Compact sand and gravel eg. Weathered sandstone or compacted quarry rubble hardstand

Type E : Concrete slab on ground .



9 Appendix "B" – Hold Down Method Details

