



## Civil & Structural Engineering Design Services Pty. Ltd.

**Client:** EXTREME MARQUEES PTY. LTD.  
**Project:** Design check – 3m Pinnacle Range Square Pagoda Tents for **70km/hr** Wind Speed.  
**Reference:** Extreme Marquees Pty Ltd Technical Data

Report by: KZ  
Checked by: EAB  
Date: 23/11/2016

JOB NO: E-11-264962-6



## Table of Contents

|       |                                                                                        |    |
|-------|----------------------------------------------------------------------------------------|----|
| 1     | Introduction .....                                                                     | 3  |
| 2     | Design Restrictions and Limitations.....                                               | 4  |
| 3     | Specifications .....                                                                   | 5  |
| 3.1   | General.....                                                                           | 5  |
| 3.2   | Aluminium Properties .....                                                             | 7  |
| 3.3   | Buckling Constants .....                                                               | 7  |
| 3.4   | Section Properties.....                                                                | 8  |
| 4     | Design Loads .....                                                                     | 8  |
| 4.1   | Ultimate .....                                                                         | 8  |
| 4.2   | Load Combinations.....                                                                 | 8  |
| 4.2.1 | Serviceability .....                                                                   | 8  |
| 4.2.2 | Ultimate .....                                                                         | 8  |
| 5     | Wind Analysis .....                                                                    | 9  |
| 5.1   | Parameters.....                                                                        | 9  |
| 5.2   | Pressure Coefficients ( $C_{fig}$ ).....                                               | 9  |
| 5.2.1 | Pressure summary .....                                                                 | 13 |
| 5.3   | Wind Load Diagrams.....                                                                | 14 |
| 5.3.1 | Wind (case 1) .....                                                                    | 14 |
| 5.3.2 | Wind (case 2) .....                                                                    | 14 |
| 5.3.3 | Max Bending Moment due to critical load combination in major axis.....                 | 15 |
| 5.3.4 | Max Bending Moment in minor axis due to critical load combination.....                 | 15 |
| 5.3.5 | Max Shear in due to critical load combination .....                                    | 16 |
| 5.3.6 | Max Axial force in upright support and roof beam due to critical load combination..... | 16 |
| 5.3.7 | Max reactions.....                                                                     | 17 |
| 5.3.8 | Summary Table: .....                                                                   | 17 |
| 6     | Checking Members Based on AS1664.1 ALUMINIUM LSD .....                                 | 17 |
| 6.1   | Upright Supports .....                                                                 | 17 |
| 6.2   | Eave .....                                                                             | 21 |
| 6.3   | Centre Pole .....                                                                      | 26 |
| 7     | Summary.....                                                                           | 30 |
| 7.1   | Conclusions.....                                                                       | 30 |
| 8     | Appendix A – Base Anchorage Requirements .....                                         | 31 |
| 9     | Appendix B – Hold Down Method Details.....                                             | 32 |




## 1 Introduction

This 'Certification' is the sole property for copyright to Mr. Ted Bennett of Civil & Structural Engineering Design Services Pty. Ltd.

The following structural drawings and calculations are for the transportable tents supplied by Extreme Marquees.

The frame consists principally of extruded '6061-T6' aluminium components with hot dipped galvanized steel ridge and knee connection inserts and base plate.

The report examines the effect of 3s gust wind of 70 km/hr on 3m × 3m Pinnacle Range Pagoda Tent as the worst-case scenario. The relevant Australian Standards AS1170.0:2002 General principles, AS1170.1:2002 Permanent, imposed and other actions and AS1170.2:2011 Wind actions are used. The design check is in accordance with AS/NZS 1664.1:1997 Aluminum limit state design and AS4100-1998 Steel Structures.

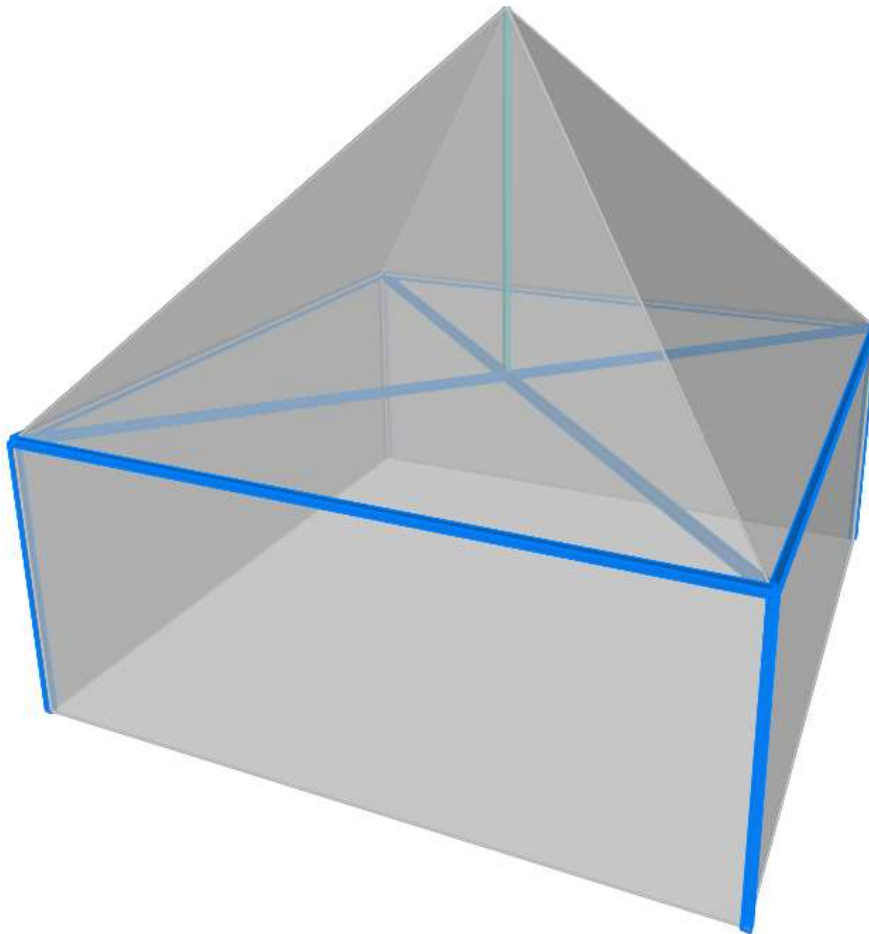



## 2 Design Restrictions and Limitations

- 2.1 The erected structure is for temporary use only.
- 2.2 It should be noted that if high gust wind speeds are anticipated or forecast in the locality of the tent, the temporary erected structure should be dismantled.
- 2.3 For forecast winds in excess of **(refer to summary)** – all fabric shall be removed from the frames, and the structure should be completely dismantled.  
(Please note that the locality squall or gust wind speed is affected by factors such as terrain exposure and site elevations.)
- 2.4 The structure may only be erected in regions with wind classifications no greater than the limits specified on the attached wind analysis.
- 2.5 The wind classifications are based upon Terrain Category 2. Considerations have also been made to the regional wind terrain category, topographical location and site shielding from adjacent structures. Please note that in many instances topographical factors such as a location on the crest of a hill or on top of an escarpment may yield a higher wind speed classification than that derived for a higher wind terrain category in a level topographical region. For this reason, particular regard shall be paid to the topographical location of the structure. For localities which do not conform to the standard prescribed descriptions for wind classes as defined above, a qualified Structural Engineer may be employed to determine an appropriate wind class for that the particular site.
- 2.6 The structures in no circumstances shall ever be erected in tropical or severe tropical cyclonic condition as defined on the Map of Australia in AS 1170.2-2011, Figure 3.1.
- 2.7 The tent structure has not been designed to withstand snow and ice loadings such as when erected in alpine regions.
- 2.8 For the projects, where the site conditions approach the design limits, extra consideration should be given to pullout tests of the stakes and professional assessment of the appropriate wind classification for the site.
- 2.9 The tents are stabilized as using rigid connections as shown on the drawings.



## Civil & Structural Engineering Design Services Pty. Ltd.

### 3 Specifications

#### 3.1 General

| Tent category |                  | Size    | Model          |
|---------------|------------------|---------|----------------|
| Material      | Aluminum 6061-T6 | 3m x 3m | Pinnacle Range |

### Pinnacle Range

3m / 4m / 5m / 6m

Product Photos

| Item                  | Specification                                                    |
|-----------------------|------------------------------------------------------------------|
| Clear-Span Width      | 3m / 4m / 5m / 6m                                                |
| Eave Height           | 2.5m                                                             |
| Ridge Height          | 4.2m / 4.8m / 5.2m / 5.8m                                        |
| Max Allowed Windspeed | 80km/hr<br>0.3kn/m <sup>2</sup>                                  |
| Eave Connection       | Hot-dip galvanized steel insert                                  |
| Framework Material    | Hard pressed extruded aluminium 6061/T6 (13HW)                   |
| Cover Material        | PVC, flame retardant to DIN 4102 B1, M2. 750-900g/m <sup>2</sup> |

Technical Diagrams

Technical diagrams showing various Pinnacle tent models with dimensions:

- Type: PAG0300/250/420
- Type: PAG0400/250/480
- Type: PAG0500/250/520
- Type: PAG0600/250/580

Product Info

The Pinnacle is the choice when impressions matter. Designed specifically for classy special events, the Pinnacle is versatile and stylish but built with substance. Quality 6061 T6 aluminium combined with a myriad of accessories across 4 sizes makes the Pinnacle a strong & flexible marquee choice.

**Accessories:**

- PVC window sidewalls
- Anchoring
- Rain gutter
- Lining & curtains
- Glass door units
- Hard walling system
- Glass walling system
- Transparent PVC cover & sidewall
- Flooring System
- Weight plate



Profiles

upright support  
square beam

level beam

centre pole

[www.extrememarquees.com.au](http://www.extrememarquees.com.au)
call 1300 850 832

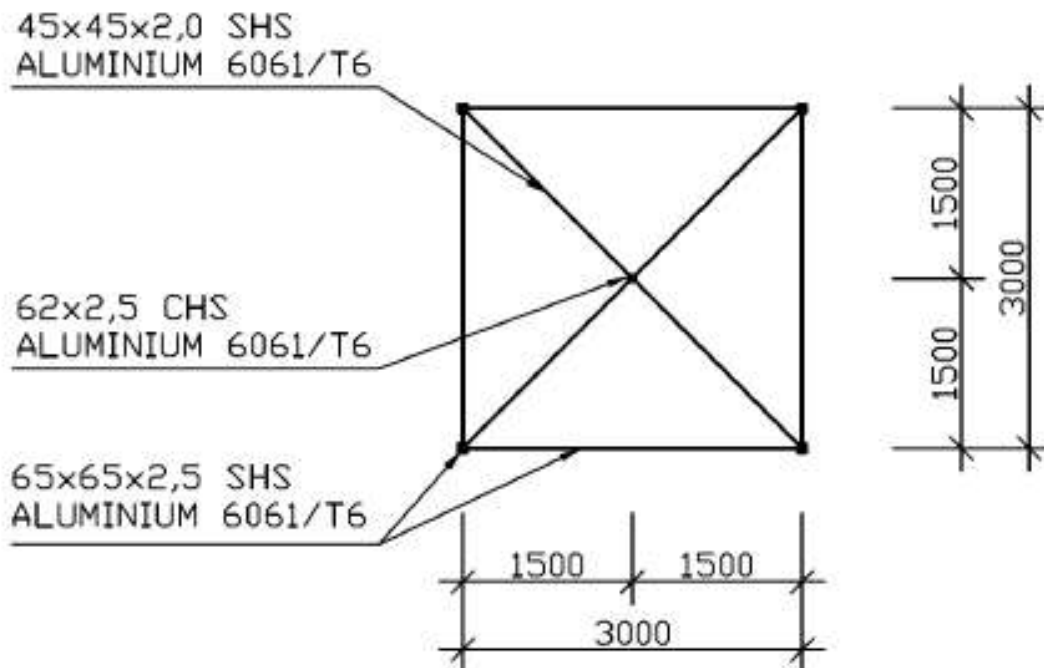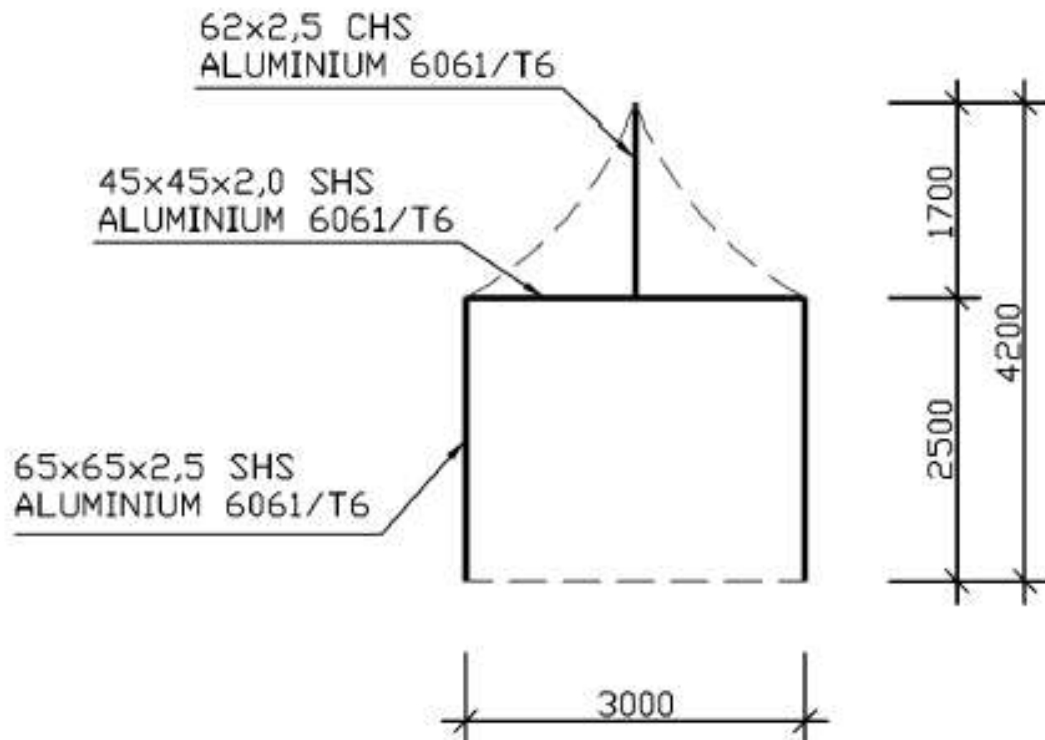



## Civil & Structural Engineering Design Services Pty. Ltd.

### 3.2 Aluminium Properties

| Aluminium Properties                       |             |           |
|--------------------------------------------|-------------|-----------|
| Compressive yield strength                 | Fcy         | 241 MPa   |
| Tensile yeild strength                     | Fty         | 241 MPa   |
| Tensile ultimate strength                  | Ftu         | 262 MPa   |
| Shear yield strength                       | Fsy         | 138 MPa   |
| Bearing yeild strength                     | Fby         | 386 MPa   |
| Bearing ultimate strength                  | Fbu         | 552 MPa   |
| Yield stress (min{Fcy:Fty})                | Fy          | 241 MPa   |
| Elastic modulus                            | E           | 70000 MPa |
| Shear modulus                              | G           | 26250 MPa |
| Value of coefficients                      | kt          | 1.00      |
|                                            | kc          | 1.00      |
| Capacity factor (general yield)            | $\phi_y$    | 0.95      |
| Capacity factor (ultimate)                 | $\phi_u$    | 0.85      |
| Capacity factor (bending)                  | $\phi_b$    | 0.85      |
| Capacity factor (elastic shear buckling)   | $\phi_v$    | 0.8       |
| Capacity factor (inelastic shear buckling) | $\phi_{vp}$ | 0.9       |

### 3.3 Buckling Constants


| Type of member and stresses                          | Intercept, MPa | Slope, MPa | Intersection |
|------------------------------------------------------|----------------|------------|--------------|
| Compression in columns and beam flanges              | BC= 242.87     | Dc= 1.43   | Cc= 69.61    |
| Compression in flat plates                           | Bp= 310.11     | Dp= 2.06   | Cp= 61.60    |
| Compressive bending stress in solid rectangular bars | Bbr= 459.89    | Dbr= 4.57  | Cbr= 67.16   |
| Compressive bending stress in round tubes            | Btb= 250.32    | Dtb= 14.18 | Ctb= 183.52  |
| Shear stress in flat plates                          | Bs= 178.29     | Ds= 0.90   | Cs= 81.24    |



## Civil & Structural Engineering Design Services Pty. Ltd.

### 3.4 Section Properties

| MEMBER(S)       | Section       | b    | d    | t   | y <sub>c</sub> | A <sub>g</sub>  | Z <sub>x</sub>  | Z <sub>y</sub>  | S <sub>x</sub>  | S <sub>y</sub>  | I <sub>x</sub>  | I <sub>y</sub>  | J               | r <sub>x</sub> | r <sub>y</sub> |
|-----------------|---------------|------|------|-----|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|
|                 |               | mm   | mm   | mm  | mm             | mm <sup>2</sup> | mm <sup>3</sup> | mm <sup>3</sup> | mm <sup>3</sup> | mm <sup>3</sup> | mm <sup>4</sup> | mm <sup>4</sup> | mm <sup>4</sup> | mm             | mm             |
| Upright Support | 64.5x64.5x2.5 | 64.5 | 64.5 | 2.5 | 32.3           | 620.0           | 12336.7         | 12336.7         | 14422.8         | 14422.8         | 397859.2        | 397859.2        | 595820.0        | 25.3           | 25.3           |
| Centre Pole     | 62x2.5CHS     | 62   | 62   | 2.5 | 31.0           | 467.3           | 6682.8          | 6682.8          | 8855.8          | 8855.8          | 207165.2        | 207165.2        | 414330.4        | 21.1           | 21.1           |
| Eave            | 45x45x2       | 45   | 45   | 2   | 22.5           | 344.0           | 4721.7          | 4721.7          | 5551.0          | 5551.0          | 106238.7        | 106238.7        | 159014.0        | 17.6           | 17.6           |

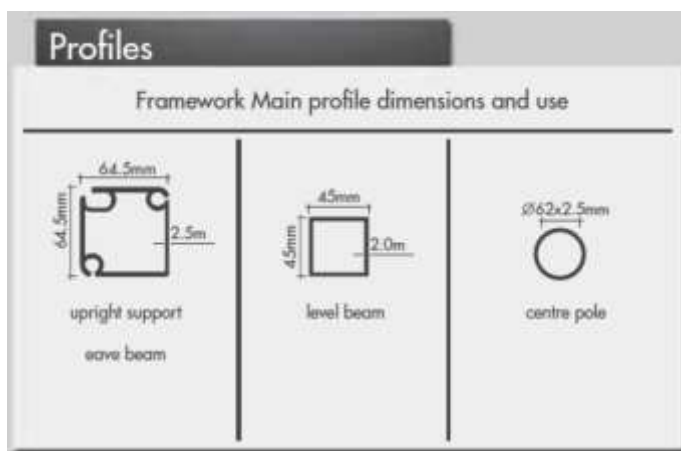

## 4 Design Loads

### 4.1 Ultimate

|                 |   | Distributed load (kPa) | Design load factor (-) | Factored imposed load (kPa)      |
|-----------------|---|------------------------|------------------------|----------------------------------|
| Live            | Q | -                      | 1.5                    | -                                |
| Self weight     | G | self weight            | 1.35, 1.2, 0.9         | 1.2 self weight, 0.9 self weight |
| 3s 70km/hr gust | W | 0.188 C <sub>fig</sub> | 1.0                    | 0.188 C <sub>fig</sub>           |

### 4.2 Load Combinations

#### 4.2.1 Serviceability

Gravity =  $1.0 \times G$

Wind =  $1.0 \times G + 1.0 \times W$

#### 4.2.2 Ultimate

Downward =  $1.35 \times G$   
=  $1.2 \times G + W_u$   
=  $1.2 \times G + W_u + W_{IS}$





## Civil & Structural Engineering Design Services Pty. Ltd.

$$\begin{aligned} \text{Upward} &= 0.9 \times G + W_u \\ &0.9 \times G + W_u + W_{IP} \end{aligned}$$

### 5 Wind Analysis

Wind towards surface (+ve), away from surface (-ve)

#### 5.1 Parameters

Terrain category = 2

Site wind speed ( $V_{sit,\beta}$ ) =  $V_R M_d (M_{z,cat} M_s M_t)$

$V_R = 19.44 \text{ m/s (70 km/hr)}$

(regional 3 s gust wind speed)

$M_d = 1$

$M_s = 1$

$M_t = 1$

$M_{z,cat} = 0.91$

(Table 4.1(B) AS1170.2)

$V_{sit,\beta} = 17.69 \text{ m/s}$

Height of structure (h) = 3.35 m

(mid of peak and eave)

Width of structure (w) = 3 m

Length of structure (l) = 3 m

Pressure (P) =  $0.5 \rho_{air} (V_{sit,\beta})^2 C_{fig} C_{dyn}$   
= 0.188  $C_{fig}$  kPa

#### 5.2 Pressure Coefficients ( $C_{fig}$ )

| Name                             | Symbol           | Value     | Unit  | Notes                                                | Ref.                             |
|----------------------------------|------------------|-----------|-------|------------------------------------------------------|----------------------------------|
| <b>Input</b>                     |                  |           |       |                                                      |                                  |
| Importance level                 |                  | 2         |       |                                                      | Table 3.1 - Table 3.2 (AS1170.0) |
| Annual probability of exceedance |                  | Temporary |       |                                                      | Table 3.3                        |
| Regional gust wind speed         |                  | 70        | Km/hr |                                                      | Table 3.1                        |
| Regional gust wind speed         | $V_R$            | 19.44     | m/s   |                                                      | Table 3.2 (AS1170.2)             |
| Wind Direction Multipliers       | $M_d$            | 1         |       |                                                      | Table 4.1                        |
| Terrain Category Multiplier      | $M_{Z,Cat}$      | 0.91      |       |                                                      | 4.3 (AS1170.2)                   |
| Shield Multiplier                | $M_s$            | 1         |       |                                                      | 4.4 (AS1170.2)                   |
| Topographic Multiplier           | $M_t$            | 1         |       |                                                      |                                  |
| Site Wind Speed                  | $V_{Site,\beta}$ | 17.69     | m/s   | $V_{Site,\beta} = V_R * M_d * M_{z,cat} * M_s * M_t$ |                                  |
| Pitch                            | $\alpha$         | 45        | Deg   |                                                      |                                  |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                               |          |       |     |
|-------------------------------|----------|-------|-----|
| Pitch                         | $\alpha$ | 0.785 | rad |
| Width                         | B        | 3     | m   |
| Width Span                    | $S_w$    | 3     | m   |
| Length                        | D        | 3     | m   |
| Height                        | Z        | 3.65  | m   |
| Bay Span                      |          | 3     | m   |
| Purlin Spacing                |          | 3.35  | m   |
| Number of Intermediate Purlin |          | -     |     |
|                               | h/d      | 1.22  |     |
|                               | h/b      | 1.22  |     |

### Wind Pressure

|                         |                  |       |                   |                                                                  |                |
|-------------------------|------------------|-------|-------------------|------------------------------------------------------------------|----------------|
| $\rho_{air}$            | $\rho$           | 1.2   | Kg/m <sup>3</sup> |                                                                  |                |
| dynamic response factor | $C_{dyn}$        | 1     |                   |                                                                  |                |
| Wind Pressure           | $\rho * C_{fig}$ | 0.188 | Kg/m <sup>2</sup> | $\rho = 0.5 \rho_{air} * (V_{des, \beta})^2 * C_{fig} * C_{dyn}$ | 2.4 (AS1170.2) |

### WIND DIRECTION 1 (Perpendicular to Length) Internal Pressure

Opening Assumption

With Dominant Opening ( $C_{pi} = n C_{pe}$ )

Internal Pressure Coefficient  
(Without Dominant) **MIN**

-0.1

Table 5.1 A

Internal Pressure Coefficient  
(Without Dominant) **MAX**

0.2

Internal Pressure Coefficient  
(With Dominant) **MIN**

-0.1

Table 5.1B

Internal Pressure Coefficient  
(With Dominant) **MAX**

0.2

N

0.6

$C_{pi} = N * C_{pe}$

Combination Factor

$K_{C,i}$

1

Internal Pressure Coefficient  
**MIN**

$C_{p,i}$

0.60

Internal Pressure Coefficient  
**MAX**

$C_{p,i}$

0.60



## Civil & Structural Engineering Design Services Pty. Ltd.

| External Pressure                                |             |       |          |             |
|--------------------------------------------------|-------------|-------|----------|-------------|
| <b>1. Windward Wall</b>                          |             |       |          |             |
| External Pressure Coefficient                    | $C_{p,e}$   | 0.7   |          | Table 5.2 A |
| Area Reduction Factor                            | $K_a$       | 1     |          | Table 5.4   |
| combination factor applied to internal pressures | $K_{C,e}$   | 0.8   |          |             |
| local pressure factor                            | $K_l$       | 1     |          |             |
| porous cladding reduction factor                 | $K_p$       | 1     |          |             |
| aerodynamic shape factor                         | $C_{fig,e}$ | 0.56  |          |             |
| Wind Wall Pressure                               | P           | 0.11  | kPa      |             |
| Edge Column Force                                | F           | 0.16  | kN/m     |             |
| Intermediate Column Force                        | F           | 0.32  | kN/m     |             |
| <b>2. Leeward Wall</b>                           |             |       |          |             |
| External Pressure Coefficient                    | $C_{p,e}$   | -0.5  |          | Table 5.2 B |
| Area Reduction Factor                            | $K_a$       | 1     |          | Table 5.4   |
| combination factor applied to internal pressures | $K_{C,e}$   | 0.8   |          |             |
| local pressure factor                            | $K_l$       | 1     |          |             |
| porous cladding reduction factor                 | $K_p$       | 1     |          |             |
| aerodynamic shape factor                         | $C_{fig,e}$ | -0.4  |          |             |
| Lee Wall Pressure                                | P           | -0.08 | kPa      |             |
| Edge Column Force                                | F           | -0.11 | kN/m     |             |
| Intermediate Column Force                        | F           | -0.23 | kN/m     |             |
| <b>3. Side Wall</b>                              |             |       |          |             |
| Area Reduction Factor                            | $K_a$       | 1     |          | Table 5.4   |
| combination factor applied to internal pressures | $K_{C,e}$   | 0.8   |          |             |
| local pressure factor                            | $K_l$       | 1     |          |             |
| porous cladding reduction factor                 | $K_p$       | 1     |          |             |
| External Pressure Coefficient                    | $C_{p,e}$   | -0.65 | 0 to 1h  |             |
| External Pressure Coefficient                    | $C_{p,e}$   | -0.5  | 1h to 2h |             |
| External Pressure Coefficient                    | $C_{p,e}$   | -0.3  | 2h to 3h |             |
| External Pressure Coefficient                    | $C_{p,e}$   | -0.2  | >3h      |             |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                          |             |              |            |          |
|--------------------------|-------------|--------------|------------|----------|
| aerodynamic shape factor | $C_{fig,e}$ | -0.52        |            | 0 to 1h  |
| aerodynamic shape factor | $C_{fig,e}$ | -0.4         |            | 1h to 2h |
| aerodynamic shape factor | $C_{fig,e}$ | -0.24        |            | 2h to 3h |
| aerodynamic shape factor | $C_{fig,e}$ | -0.16        |            | >3h      |
| Side Wall Pressure       | P           | <b>-0.10</b> | <b>kPa</b> | 0 to 1h  |
| Side Wall Pressure       | P           | <b>-0.08</b> | <b>kPa</b> | 1h to 2h |
| Side Wall Pressure       | P           | <b>-0.05</b> | <b>kPa</b> | 2h to 3h |
| Side Wall Pressure       | P           | <b>-0.03</b> | <b>kPa</b> | >3h      |

### 4. Roof Up Wind Slope

|                                                  |             |             |             |                     |
|--------------------------------------------------|-------------|-------------|-------------|---------------------|
| Area Reduction Factor                            | $K_a$       | 1           |             | $\alpha > 10^\circ$ |
| combination factor applied to internal pressures | $K_{C,e}$   | 0.8         |             |                     |
| local pressure factor                            | $K_l$       | 1           |             |                     |
| porous cladding reduction factor                 | $K_p$       | 1           |             |                     |
| External Pressure Coefficient <b>MIN</b>         | $C_{P,e}$   | 0           |             |                     |
| External Pressure Coefficient <b>MAX</b>         | $C_{P,e}$   | 0.565       |             |                     |
| aerodynamic shape factor <b>MIN</b>              | $C_{fig,e}$ | 0.00        |             |                     |
| aerodynamic shape factor <b>MAX</b>              | $C_{fig,e}$ | 0.45        |             |                     |
| Pressure <b>MIN</b>                              | P           | <b>0.00</b> | <b>kPa</b>  |                     |
| Pressure <b>MAX</b>                              | P           | <b>0.08</b> | <b>kPa</b>  |                     |
| Edge Rafter Force <b>MIN</b>                     | F           | <b>0.00</b> | <b>kN/m</b> |                     |
| Edge Rafter Force <b>Max</b>                     | F           | <b>0.13</b> | <b>kN/m</b> |                     |
| Intermediate Rafter Force <b>MIN</b>             | F           | <b>0.00</b> | <b>kN/m</b> |                     |
| Intermediate Rafter Force <b>MAX</b>             | F           | <b>0.25</b> | <b>kN/m</b> |                     |

### 5. Roof Down Wind Slope

|                                                  |             |              |            |  |
|--------------------------------------------------|-------------|--------------|------------|--|
| Area Reduction Factor                            | $K_a$       | 1            |            |  |
| combination factor applied to internal pressures | $K_{C,e}$   | 0.8          |            |  |
| local pressure factor                            | $K_l$       | 1            |            |  |
| porous cladding reduction factor                 | $K_p$       | 1            |            |  |
| External Pressure Coefficient                    | $C_{P,e}$   | -0.6         |            |  |
| aerodynamic shape factor                         | $C_{fig,e}$ | -0.48        |            |  |
| Pressure <b>MIN</b>                              | P           | <b>-0.09</b> | <b>kPa</b> |  |
| Pressure <b>MAX</b>                              | P           | <b>-0.09</b> | <b>kPa</b> |  |

Table 5.3 B

Table 5.3C




## Civil & Structural Engineering Design Services Pty. Ltd.


|                                      |   |       |      |
|--------------------------------------|---|-------|------|
| Edge Rafter Force <b>MIN</b>         | F | -0.14 | kN/m |
| Edge Rafter Force <b>MAX</b>         | F | -0.14 | kN/m |
| Intermediate Rafter Force <b>MIN</b> | F | -0.27 | kN/m |
| Intermediate Rafter Force <b>MAX</b> | F | -0.27 | kN/m |

### 5.2.1 Pressure summary

| WIND EXTERNAL PRESSURE |                              |       | Direction1 (Perpendicular to Length) |                   | Direction2 (Parallel to Length) |           |                   |           |           |
|------------------------|------------------------------|-------|--------------------------------------|-------------------|---------------------------------|-----------|-------------------|-----------|-----------|
| Windward (kPa)         |                              |       | 0.11                                 |                   | 0.00                            |           |                   |           |           |
| Leeward (kPa)          |                              |       | -0.08                                |                   | 0.00                            |           |                   |           |           |
| Sidewall (m)           | Length                       | (m)   | (m)                                  | (Kpa)             | (Kpa)                           |           |                   |           |           |
|                        | 0 - 1h                       | 0     | 3.65                                 | -0.10             | 0.00                            |           |                   |           |           |
|                        | 1h - 2h                      | 3.65  | 7.3                                  | -0.08             | 0.00                            |           |                   |           |           |
|                        | 2h - 3h                      | 7.3   | 10.95                                | -0.05             | 0.00                            |           |                   |           |           |
|                        | >3h                          | 10.95 | -                                    | -0.03             | 0.00                            |           |                   |           |           |
| Roof                   |                              |       | Min (Kpa)                            | Max (Kpa)         | Length                          | (m)       | (m)               | Min (Kpa) | Max (Kpa) |
|                        | Upwind Slope                 |       | 0.00                                 | 0.08              | 0-0.5h                          | 0.00      | 1.83              | 0.00      | 0.00      |
|                        | Downwind Slope               |       | -0.09                                | -0.09             | 0.5h-1h                         | 1.83      | 3.65              | 0.00      | 0.00      |
|                        |                              |       |                                      |                   | 1h-2h                           | 3.65      | 7.30              | 0.00      | 0.00      |
|                        |                              |       |                                      |                   | 2h-3h                           | 7.30      | 10.95             | 0.00      | 0.00      |
|                        |                              |       |                                      |                   | >3h                             | 10.95     | -                 | 0.00      | 0.00      |
|                        | Wind Internal Pressure (kPa) |       |                                      | Min (kPa)         | Max (kPa)                       | Min (kPa) |                   | Max (kPa) |           |
| Proportion of Cpe      |                              |       |                                      | Proportion of Cpe | Proportion of Cpe               |           | Proportion of Cpe |           |           |

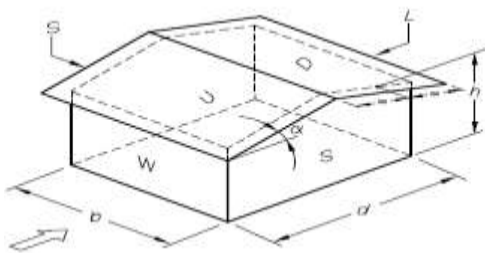

Direction 1

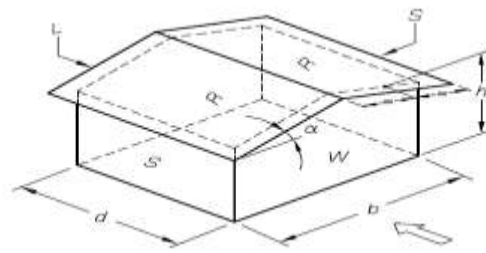

Direction 2


AS1170.2




## Civil & Structural Engineering Design Services Pty. Ltd.

### 5.3 Wind Load Diagrams

#### 5.3.1 Wind (case 1)

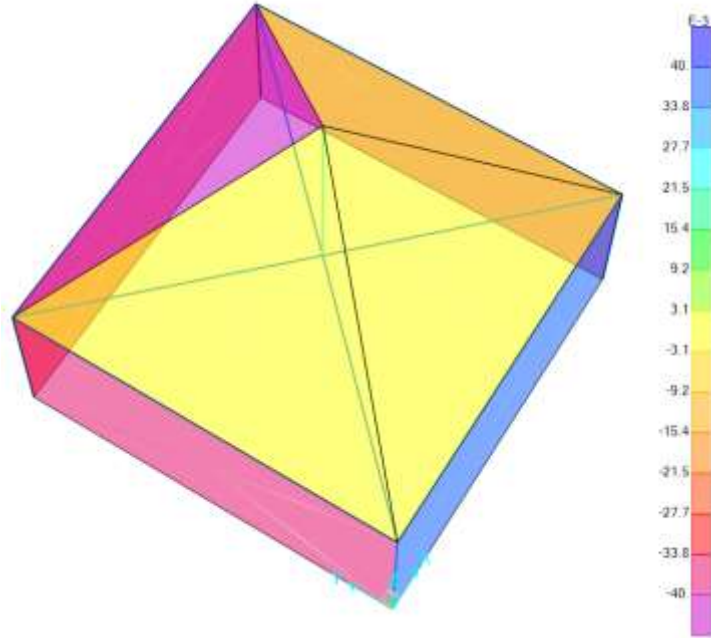

#### 5.3.2 Wind (case 2)

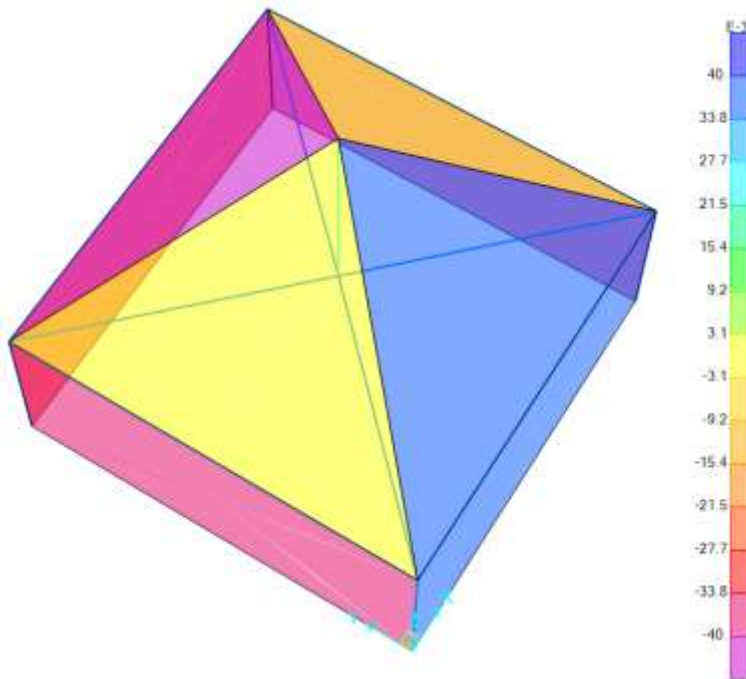


After 3D model analysis, each member is checked based on adverse load combination.

In this regard the maximum bending moment, shear and axial force due to adverse load combinations for each member are presented as below:




## Civil & Structural Engineering Design Services Pty. Ltd.

### 5.3.3 Max Bending Moment due to critical load combination in major axis

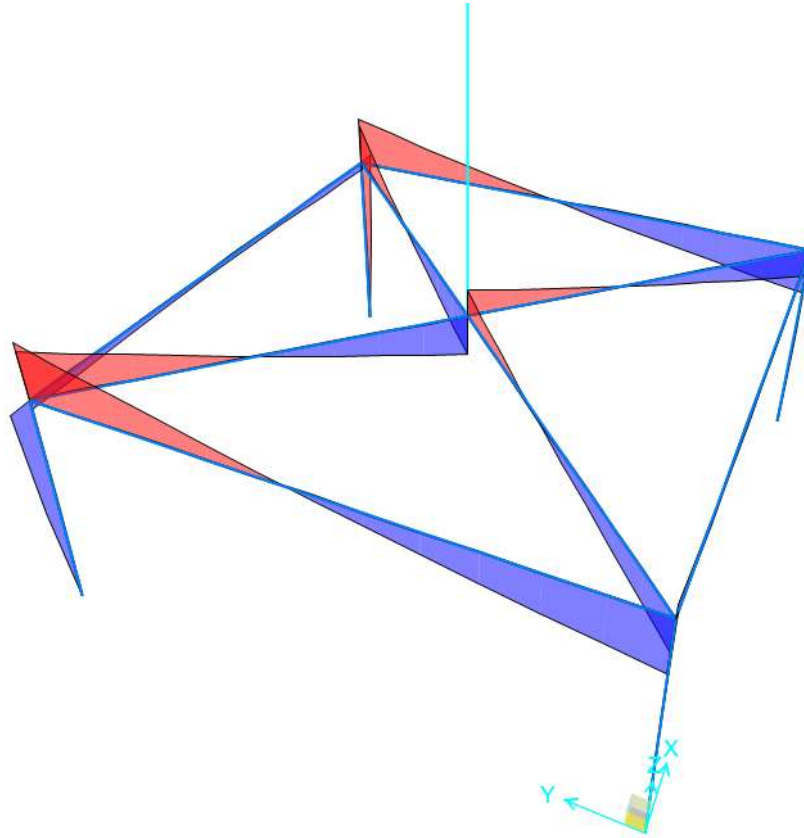


### 5.3.4 Max Bending Moment in minor axis due to critical load combination

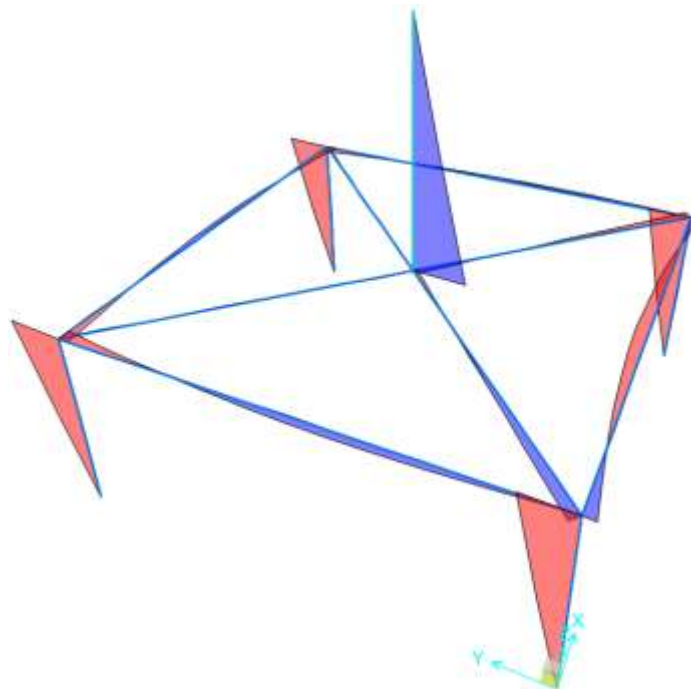




5.3.5 Max Shear in due to critical load combination

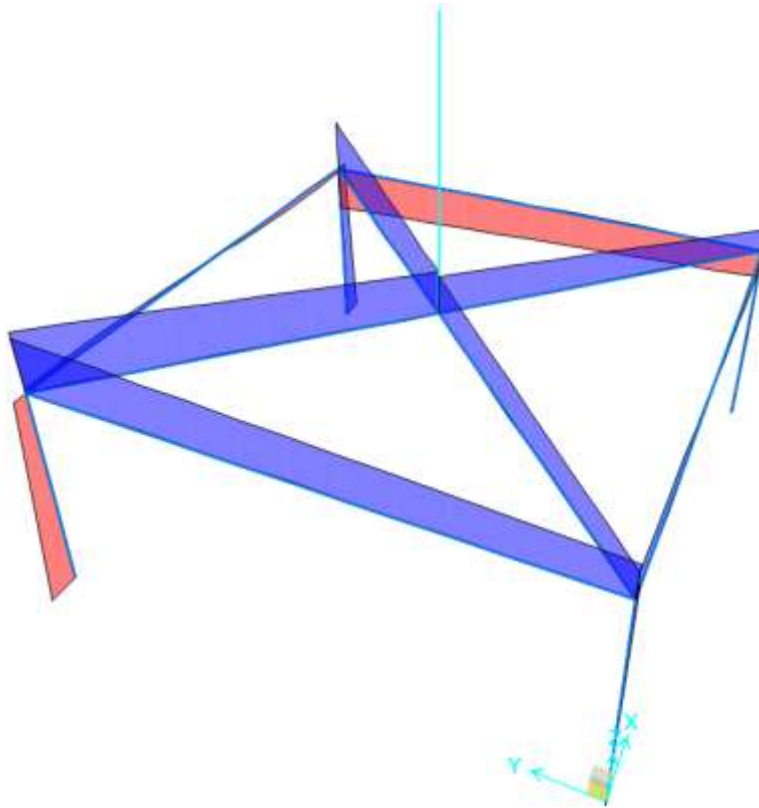

5.3.6 Max Axial force in upright support and roof beam due to critical load combination

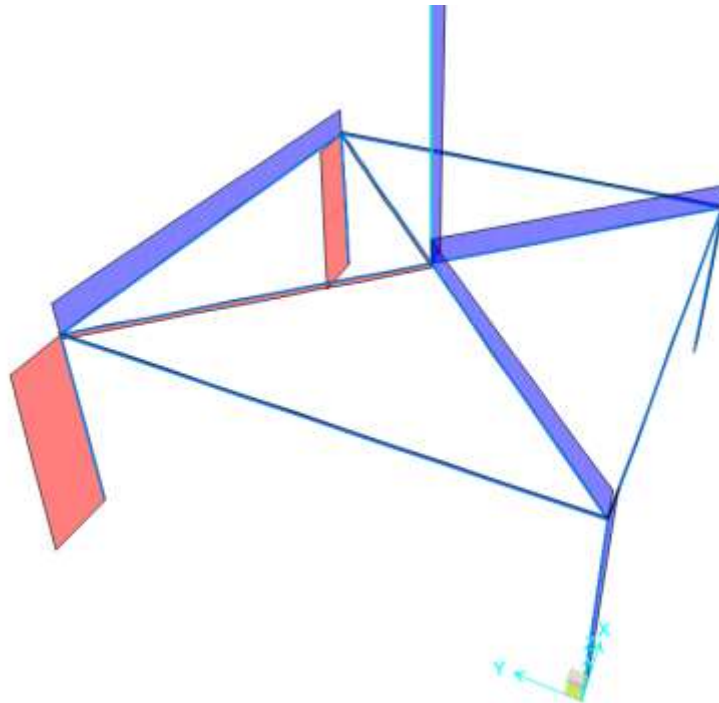






## Civil & Structural Engineering Design Services Pty. Ltd.

### 5.3.7 Max reactions

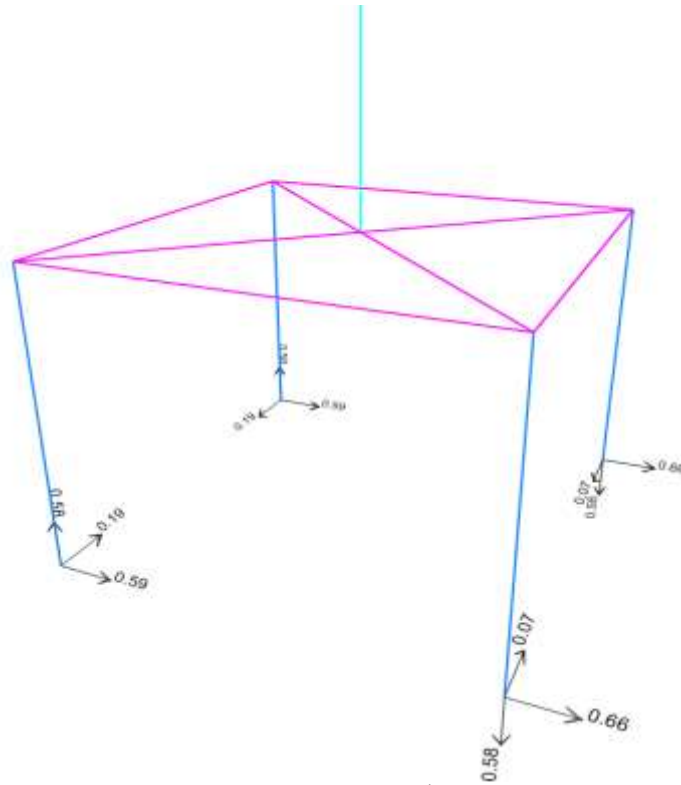

Max Reaction (Bearing)  $N^* = 0.8 \text{ kN}$   
 Max Reaction (Uplift)  $N^* = 0.63 \text{ kN}$

### 5.3.8 Summary Table:

| MEMBER(S)       | Section       | b    | d    | t   | Vx    | Vy    | P (Axial)<br>Negative -><br>Compression<br>Positive -><br>Tension | Mx         | My      |
|-----------------|---------------|------|------|-----|-------|-------|-------------------------------------------------------------------|------------|---------|
|                 |               | mm   | mm   | mm  | kN    | kN    | kN                                                                | kN.m       | kN.m    |
| Upright Support | 64.5x64.5x2.5 | 64.5 | 64.5 | 2.5 | -0.07 | 0.216 | -0.746                                                            | -0.1789    | -1.1125 |
| Centre Pole     | 62x2.5CHS     | 62   | 62   | 2.5 | 6E-18 | 0.231 | -0.00969                                                          | -4.067E-13 | 0.3925  |
| Eave            | 45x45x2       | 45   | 45   | 2   | -0.5  | -0.01 | -0.06                                                             | -0.7403    | -0.0161 |

## 6 Checking Members Based on AS1664.1 ALUMINIUM LSD

### 6.1 Upright Supports

| NAME             | SYMBOL          | VALUE | UNIT | NOTES | REF      |
|------------------|-----------------|-------|------|-------|----------|
| 64.5x64.5x2.5    | Upright Support |       |      |       |          |
| Alloy and temper | 6061-T6         |       |      |       | AS1664.1 |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                           |            |   |               |                 |             |         |
|-----------------------------------------------------------|------------|---|---------------|-----------------|-------------|---------|
| Tension                                                   | $F_{tu}$   | = | 262           | MPa             | Ultimate    | T3.3(A) |
|                                                           | $F_{ty}$   | = | 241           | MPa             | Yield       |         |
| Compression                                               | $F_{cy}$   | = | 241           | MPa             |             |         |
| Shear                                                     | $F_{su}$   | = | 165           | MPa             | Ultimate    |         |
|                                                           | $F_{sy}$   | = | 138           | MPa             | Yield       |         |
| Bearing                                                   | $F_{bu}$   | = | 551           | MPa             | Ultimate    |         |
|                                                           | $F_{by}$   | = | 386           | MPa             | Yield       |         |
| Modulus of elasticity                                     | $E$        | = | 70000         | MPa             | Compressive |         |
|                                                           | $k_t$      | = | 1.0           |                 |             | T3.4(B) |
|                                                           | $k_c$      | = | 1.0           |                 |             |         |
| <b>FEM ANALYSIS RESULTS</b>                               |            |   |               |                 |             |         |
| Axial force                                               | $P$        | = | 0.746         | kN              | compression |         |
|                                                           | $P$        | = | 0             | kN              | Tension     |         |
| In plane moment                                           | $M_x$      | = | 0.1789        | kNm             |             |         |
| Out of plane moment                                       | $M_y$      | = | 1.1125        | kNm             |             |         |
| <b>DESIGN STRESSES</b>                                    |            |   |               |                 |             |         |
| Gross cross section area                                  | $A_g$      | = | 620           | mm <sup>2</sup> |             |         |
| In-plane elastic section modulus                          | $Z_x$      | = | 12336.71<br>8 | mm <sup>3</sup> |             |         |
| Out-of-plane elastic section mod.                         | $Z_y$      | = | 12336.71<br>8 | mm <sup>3</sup> |             |         |
| Stress from axial force                                   | $f_a$      | = | $P/A_g$       |                 |             |         |
|                                                           |            | = | 1.20          | MPa             | compression |         |
|                                                           |            | = | 0.00          | MPa             | Tension     |         |
| Stress from in-plane bending                              | $f_{bx}$   | = | $M_x/Z_x$     |                 |             |         |
|                                                           |            | = | 14.50         | MPa             | compression |         |
| Stress from out-of-plane bending                          | $f_{by}$   | = | $M_y/Z_y$     |                 |             |         |
|                                                           |            | = | 90.18         | MPa             | compression |         |
| <b>Tension</b>                                            |            |   |               |                 |             |         |
| <b>3.4.3 Tension in rectangular tubes</b>                 |            |   |               |                 |             |         |
|                                                           | $\phi F_L$ | = | 228.95        | MPa             |             |         |
|                                                           |            | O |               |                 |             |         |
|                                                           | $\phi F_L$ | = | 222.70        | MPa             |             |         |
| <b>COMPRESSION</b>                                        |            |   |               |                 |             |         |
| <b>3.4.8 Compression in columns, axial, gross section</b> |            |   |               |                 |             |         |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                                                                               |             |   |            |              |
|---------------------------------------------------------------------------------------------------------------|-------------|---|------------|--------------|
| <b>1. General</b>                                                                                             |             |   |            | ... 3.4.8.1  |
| Unsupported length of member                                                                                  | L           | = | 2500 mm    |              |
| Effective length factor                                                                                       | k           | = | 1          |              |
| Radius of gyration about buckling axis (Y)                                                                    | $r_y$       | = | 25.33 mm   |              |
| Radius of gyration about buckling axis (X)                                                                    | $r_x$       | = | 25.33 mm   |              |
| Slenderness ratio                                                                                             | $kLb/r_y$   | = | 98.69      |              |
| Slenderness ratio                                                                                             | $kL/r_x$    | = | 98.69      |              |
| Slenderness parameter                                                                                         | $\lambda$   | = | 1.84       |              |
|                                                                                                               | $D_c^*$     | = | 90.3       |              |
|                                                                                                               | $S_1^*$     | = | 0.33       |              |
|                                                                                                               | $S_2^*$     | = | 1.23       |              |
|                                                                                                               | $\phi_{cc}$ | = | 0.838      |              |
| Factored limit state stress                                                                                   | $\phi F_L$  | = | 59.45 MPa  |              |
| <b>2. Sections not subject to torsional or torsional-flexural buckling</b>                                    |             |   |            | ... 3.4.8.2  |
| Largest slenderness ratio for flexural buckling                                                               | $kL/r$      | = | 98.69      |              |
| <b>3.4.10 Uniform compression in components of columns, gross section - flat plates</b>                       |             |   |            |              |
| <b>1. Uniform compression in components of columns, gross section - flat plates with both edges supported</b> |             |   |            | ... 3.4.10.1 |
|                                                                                                               | $k_1$       | = | 0.35       | T3.3(D)      |
| Max. distance between toes of fillets of supporting elements for plate                                        | $b'$        | = | 59.5       |              |
|                                                                                                               | $t$         | = | 2.5 mm     |              |
| Slenderness                                                                                                   | $b/t$       | = | 23.8       |              |
| Limit 1                                                                                                       | $S_1$       | = | 12.34      |              |
| Limit 2                                                                                                       | $S_2$       | = | 32.87      |              |
| Factored limit state stress                                                                                   | $\phi F_L$  | = | 196.79 MPa |              |
| Most adverse compressive limit state stress                                                                   | $F_a$       | = | 59.45 MPa  |              |
| Most adverse tensile limit state stress                                                                       | $F_a$       | = | 222.70 MPa |              |
| Most adverse compressive & Tensile capacity factor                                                            | $f_a/F_a$   | = | 0.02       | PASS         |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                                                                                                                      |                 |   |                          |      |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---|--------------------------|------|-----------|
| <b>BENDING - IN-PLANE</b>                                                                                                                            |                 |   |                          |      |           |
| <b>3.4.15</b> <i>Compression in beams, extreme fibre, gross section rectangular tubes, box sections</i>                                              |                 |   |                          |      |           |
| Unbraced length for bending                                                                                                                          | $L_b$           | = | 2500 mm                  |      |           |
| Second moment of area (weak axis)                                                                                                                    | $I_y$           | = | 3.98E+05 mm <sup>4</sup> |      |           |
| Torsion modulus                                                                                                                                      | $J$             | = | 5.96E+05 mm <sup>3</sup> |      |           |
| Elastic section modulus                                                                                                                              | $Z$             | = | 12336.71 mm <sup>3</sup> |      |           |
| Slenderness                                                                                                                                          | $S$             | = | 126.69                   |      |           |
| Limit 1                                                                                                                                              | $S_1$           | = | 0.39                     |      |           |
| Limit 2                                                                                                                                              | $S_2$           | = | 1695.86                  |      |           |
| Factored limit state stress                                                                                                                          | $\phi F_L$      | = | 204.57 MPa               |      | 3.4.15(2) |
| <b>3.4.17</b> <i>Compression in components of beams (component under uniform compression), gross section - flat plates with both edges supported</i> |                 |   |                          |      |           |
|                                                                                                                                                      | $k_1$           | = | 0.5                      |      | T3.3(D)   |
|                                                                                                                                                      | $k_2$           | = | 2.04                     |      | T3.3(D)   |
| Max. distance between toes of fillets of supporting elements for plate                                                                               | $b'$            | = | 59.5 mm                  |      |           |
|                                                                                                                                                      | $t$             | = | 2.5 mm                   |      |           |
| Slenderness                                                                                                                                          | $b/t$           | = | 23.8                     |      |           |
| Limit 1                                                                                                                                              | $S_1$           | = | 12.34                    |      |           |
| Limit 2                                                                                                                                              | $S_2$           | = | 46.95                    |      |           |
| Factored limit state stress                                                                                                                          | $\phi F_L$      | = | 196.79 MPa               |      |           |
| Most adverse in-plane bending limit state stress                                                                                                     | $F_{bx}$        | = | 196.79 MPa               |      |           |
| Most adverse in-plane bending capacity factor                                                                                                        | $f_{bx}/F_{bx}$ | = | 0.07                     | PASS |           |
| <b>BENDING - OUT-OF-PLANE</b>                                                                                                                        |                 |   |                          |      |           |
| <i>NOTE: Limit state stresses, <math>\phi F_L</math> are the same for out-of-plane bending (doubly symmetric section)</i>                            |                 |   |                          |      |           |
| Factored limit state stress                                                                                                                          | $\phi F_L$      | = | 196.79 MPa               |      |           |
| Most adverse out-of-plane bending limit state stress                                                                                                 | $F_{by}$        | = | 196.79 MPa               |      |           |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                   |                                                    |        |         |     |      |              |
|---------------------------------------------------|----------------------------------------------------|--------|---------|-----|------|--------------|
| Most adverse out-of-plane bending capacity factor | $f_{by}/F_{by}$                                    | =      | 0.46    |     | PASS |              |
| COMBINED ACTIONS                                  |                                                    |        |         |     |      |              |
| <b>4.1.1 Combined compression and bending</b>     |                                                    |        |         |     |      |              |
|                                                   | $F_a$                                              | =      | 59.45   | MPa |      | ... 4.1.1(2) |
|                                                   | $F_{ao}$                                           | =      | 196.79  | MPa |      | ... 3.4.8    |
|                                                   | $F_{bx}$                                           | =      | 196.79  | MPa |      | ... 3.4.10   |
|                                                   | $F_{by}$                                           | =      | 196.79  | MPa |      | ... 3.4.17   |
|                                                   | $f_a/F_a$                                          | =      | 0.020   |     |      | ... 3.4.17   |
| Check:                                            | $f_a/F_a + f_{bx}/F_{bx} + f_{by}/F_{by} \leq 1.0$ |        |         |     |      | ... 4.1.1(3) |
| i.e.                                              | 0.55                                               | $\leq$ | 1.0     |     | PASS |              |
| SHEAR                                             |                                                    |        |         |     |      |              |
| <b>3.4.24 Shear in webs (Major Axis)</b>          |                                                    |        |         |     |      |              |
| Clear web height                                  | $h$                                                | =      | 59.5    | mm  |      | ... 4.1.1(2) |
|                                                   | $t$                                                | =      | 2.5     | mm  |      |              |
| Slenderness                                       | $h/t$                                              | =      | 23.8    |     |      |              |
| Limit 1                                           | $S_1$                                              | =      | 29.01   |     |      |              |
| Limit 2                                           | $S_2$                                              | =      | 59.31   |     |      |              |
| Factored limit state stress                       | $\phi F_L$                                         | =      | 131.10  | MPa |      |              |
| Stress From Shear force                           | $f_{sx}$                                           | =      | $V/A_w$ |     |      |              |
|                                                   |                                                    |        | 0.24    | MPa |      |              |
| <b>3.4.25 Shear in webs (Minor Axis)</b>          |                                                    |        |         |     |      |              |
| Clear web height                                  | $b$                                                | =      | 59.5    | mm  |      |              |
|                                                   | $t$                                                | =      | 2.5     | mm  |      |              |
| Slenderness                                       | $b/t$                                              | =      | 23.8    |     |      |              |
| Factored limit state stress                       | $\phi F_L$                                         | =      | 131.10  | MPa |      |              |
| Stress From Shear force                           | $f_{sy}$                                           | =      | $V/A_w$ |     |      |              |
|                                                   |                                                    |        | 0.73    | MPa |      |              |

### 6.2 Eave

| NAME | SYMBOL | VALUE | UNIT | NOTES | REF |
|------|--------|-------|------|-------|-----|
|------|--------|-------|------|-------|-----|



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                           |             |        |               |                 |             |              |
|-------------------------------------------|-------------|--------|---------------|-----------------|-------------|--------------|
| <b>45x45x2</b>                            | <b>Eave</b> |        |               |                 |             |              |
| Alloy and temper                          | 6061-T6     |        |               |                 |             | AS1664.<br>1 |
| Tension                                   | $F_{tu}$    | =      | 262           | MPa             | Ultimate    | T3.3(A)      |
|                                           | $F_{ty}$    | =      | 241           | MPa             | Yield       |              |
| Compression                               | $F_{cy}$    | =      | 241           | MPa             |             |              |
| Shear                                     | $F_{su}$    | =      | 165           | MPa             | Ultimate    |              |
|                                           | $F_{sy}$    | =      | 138           | MPa             | Yield       |              |
| Bearing                                   | $F_{bu}$    | =      | 551           | MPa             | Ultimate    |              |
|                                           | $F_{by}$    | =      | 386           | MPa             | Yield       |              |
| Modulus of elasticity                     | E           | =      | 70000         | MPa             | Compressive |              |
|                                           | $k_t$       | =      | 1.0           |                 |             | T3.4(B)      |
|                                           | $k_c$       | =      | 1.0           |                 |             |              |
| <b>FEM ANALYSIS RESULTS</b>               |             |        |               |                 |             |              |
| Axial force                               | P           | =      | 0.06          | kN              | compression |              |
|                                           | P           | =      | 0             | kN              | Tension     |              |
| In plane moment                           | $M_x$       | =      | 0.7403        | kNm             |             |              |
| Out of plane moment                       | $M_y$       | =      | 0.0161        | kNm             |             |              |
| <b>DESIGN STRESSES</b>                    |             |        |               |                 |             |              |
| Gross cross section area                  | $A_g$       | =      | 344           | mm <sup>2</sup> |             |              |
| In-plane elastic section modulus          | $Z_x$       | =      | 4721.718<br>5 | mm <sup>3</sup> |             |              |
| Out-of-plane elastic section mod.         | $Z_y$       | =      | 4721.718<br>5 | mm <sup>3</sup> |             |              |
| Stress from axial force                   | $f_a$       | =      | P/ $A_g$      |                 |             |              |
|                                           |             | =      | 0.17          | MPa             | compression |              |
|                                           |             | =      | 0.00          | MPa             | Tension     |              |
| Stress from in-plane bending              | $f_{bx}$    | =      | $M_x/Z_x$     |                 |             |              |
|                                           |             | =      | 156.79        | MPa             | compression |              |
| Stress from out-of-plane bending          | $f_{by}$    | =      | $M_y/Z_y$     |                 |             |              |
|                                           |             | =      | 3.41          | MPa             | compression |              |
| <b>Tension</b>                            |             |        |               |                 |             |              |
| <b>3.4.3 Tension in rectangular tubes</b> |             |        |               |                 |             |              |
|                                           | $\phi F_L$  | =      | 228.95        | MPa             |             |              |
|                                           |             | O<br>R |               |                 |             |              |
|                                           | $\phi F_L$  | =      | 222.70        | MPa             |             |              |



## Civil & Structural Engineering Design Services Pty. Ltd.

| COMPRESSION                                                                                                   |                    |   |        |     |  |              |
|---------------------------------------------------------------------------------------------------------------|--------------------|---|--------|-----|--|--------------|
| <b>3.4.8</b> <i>Compression in columns, axial, gross section</i>                                              |                    |   |        |     |  |              |
| <i>1. General</i>                                                                                             |                    |   |        |     |  | ... 3.4.8.1  |
| Unsupported length of member                                                                                  | L                  | = | 3000   | mm  |  |              |
| Effective length factor                                                                                       | k                  | = | 1      |     |  |              |
| Radius of gyration about buckling axis (Y)                                                                    | r <sub>y</sub>     | = | 17.57  | mm  |  |              |
| Radius of gyration about buckling axis (X)                                                                    | r <sub>x</sub>     | = | 17.57  | mm  |  |              |
| Slenderness ratio                                                                                             | kLb/r <sub>y</sub> | = | 170.71 |     |  |              |
| Slenderness ratio                                                                                             | kL/r <sub>x</sub>  | = | 170.71 |     |  |              |
| Slenderness parameter                                                                                         | λ                  | = | 3.19   |     |  |              |
|                                                                                                               | D <sub>c</sub> *   | = | 90.3   |     |  |              |
|                                                                                                               | S <sub>1</sub> *   | = | 0.33   |     |  |              |
|                                                                                                               | S <sub>2</sub> *   | = | 1.23   |     |  |              |
|                                                                                                               | φ <sub>cc</sub>    | = | 0.950  |     |  |              |
| Factored limit state stress                                                                                   | φF <sub>L</sub>    | = | 22.52  | MPa |  |              |
| <i>2. Sections not subject to torsional or torsional-flexural buckling</i>                                    |                    |   |        |     |  | ... 3.4.8.2  |
| Largest slenderness ratio for flexural buckling                                                               | kL/r               | = | 170.71 |     |  |              |
| <b>3.4.10</b> <i>Uniform compression in components of columns, gross section - flat plates</i>                |                    |   |        |     |  |              |
| <i>1. Uniform compression in components of columns, gross section - flat plates with both edges supported</i> |                    |   |        |     |  | ... 3.4.10.1 |
|                                                                                                               | k <sub>1</sub>     | = | 0.35   |     |  | T3.3(D)      |
| Max. distance between toes of fillets of supporting elements for plate                                        | b'                 | = | 41     |     |  |              |
|                                                                                                               | t                  | = | 2      | mm  |  |              |
| Slenderness                                                                                                   | b/t                | = | 20.5   |     |  |              |
| Limit 1                                                                                                       | S <sub>1</sub>     | = | 12.34  |     |  |              |
| Limit 2                                                                                                       | S <sub>2</sub>     | = | 32.87  |     |  |              |
| Factored limit state stress                                                                                   | φF <sub>L</sub>    | = | 206.05 | MPa |  |              |
| Most adverse compressive limit state stress                                                                   | F <sub>a</sub>     | = | 22.52  | MPa |  |              |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                                                                                                               |                 |   |          |                 |      |           |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---|----------|-----------------|------|-----------|
| Most adverse tensile limit state stress                                                                                                       | $F_a$           | = | 222.70   | MPa             |      |           |
| Most adverse compressive & Tensile capacity factor                                                                                            | $f_a/F_a$       | = | 0.01     |                 | PASS |           |
| <b>BENDING - IN-PLANE</b>                                                                                                                     |                 |   |          |                 |      |           |
| <b>3.4.15 Compression in beams, extreme fibre, gross section rectangular tubes, box sections</b>                                              |                 |   |          |                 |      |           |
| Unbraced length for bending                                                                                                                   | $L_b$           | = | 3000     | mm              |      |           |
| Second moment of area (weak axis)                                                                                                             | $I_y$           | = | 106238.6 | mm <sup>4</sup> |      |           |
| Torsion modulus                                                                                                                               | $J$             | = | 159014   | mm <sup>3</sup> |      |           |
| Elastic section modulus                                                                                                                       | $Z$             | = | 4721.718 | mm <sup>3</sup> |      |           |
| Slenderness                                                                                                                                   | $S$             | = | 217.97   |                 |      |           |
| Limit 1                                                                                                                                       | $S_1$           | = | 0.39     |                 |      |           |
| Limit 2                                                                                                                                       | $S_2$           | = | 1695.86  |                 |      |           |
| Factored limit state stress                                                                                                                   | $\phi F_L$      | = | 196.52   | MPa             |      | 3.4.15(2) |
| <b>3.4.17 Compression in components of beams (component under uniform compression), gross section - flat plates with both edges supported</b> |                 |   |          |                 |      |           |
|                                                                                                                                               | $k_1$           | = | 0.5      |                 |      | T3.3(D)   |
|                                                                                                                                               | $k_2$           | = | 2.04     |                 |      | T3.3(D)   |
| Max. distance between toes of fillets of supporting elements for plate                                                                        | $b'$            | = | 41       | mm              |      |           |
|                                                                                                                                               | $t$             | = | 2        | mm              |      |           |
| Slenderness                                                                                                                                   | $b/t$           | = | 20.5     |                 |      |           |
| Limit 1                                                                                                                                       | $S_1$           | = | 12.34    |                 |      |           |
| Limit 2                                                                                                                                       | $S_2$           | = | 46.95    |                 |      |           |
| Factored limit state stress                                                                                                                   | $\phi F_L$      | = | 206.05   | MPa             |      |           |
| Most adverse in-plane bending limit state stress                                                                                              | $F_{bx}$        | = | 196.52   | MPa             |      |           |
| Most adverse in-plane bending capacity factor                                                                                                 | $f_{bx}/F_{bx}$ | = | 0.80     |                 | PASS |           |
| <b>BENDING - OUT-OF-PLANE</b>                                                                                                                 |                 |   |          |                 |      |           |





## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                                                                         |                                                    |   |            |      |               |
|---------------------------------------------------------------------------------------------------------|----------------------------------------------------|---|------------|------|---------------|
| NOTE: Limit state stresses, $\phi F_L$ are the same for out-of-plane bending (doubly symmetric section) |                                                    |   |            |      |               |
| Factored limit state stress                                                                             | $\phi F_L$                                         | = | 196.52 MPa |      |               |
| Most adverse out-of-plane bending limit state stress                                                    | $F_{by}$                                           | = | 196.52 MPa |      |               |
| Most adverse out-of-plane bending capacity factor                                                       | $f_{by}/F_{by}$                                    | = | 0.02       | PASS |               |
| COMBINED ACTIONS                                                                                        |                                                    |   |            |      |               |
| 4.1.1 Combined compression and bending                                                                  |                                                    |   |            |      | ...           |
|                                                                                                         | $F_a$                                              | = | 22.52 MPa  |      | 4.1.1(2)      |
|                                                                                                         | $F_{ao}$                                           | = | 206.05 MPa |      | ... 3.4.8     |
|                                                                                                         | $F_{bx}$                                           | = | 196.52 MPa |      | ... 3.4.10    |
|                                                                                                         | $F_{by}$                                           | = | 196.52 MPa |      | ... 3.4.17    |
|                                                                                                         | $f_a/F_a$                                          | = | 0.008      |      | ... 3.4.17    |
| Check:                                                                                                  | $f_a/F_a + f_{bx}/F_{bx} + f_{by}/F_{by} \leq 1.0$ |   |            |      | ... 4.1.1 (3) |
| i.e.                                                                                                    | 0.82                                               | ≤ | 1.0        | PASS |               |
| SHEAR                                                                                                   |                                                    |   |            |      |               |
| 3.4.24 Shear in webs (Major Axis)                                                                       |                                                    |   |            |      | ...           |
|                                                                                                         |                                                    |   |            |      | 4.1.1(2)      |
| Clear web height                                                                                        | $h$                                                | = | 41 mm      |      |               |
|                                                                                                         | $t$                                                | = | 2 mm       |      |               |
| Slenderness                                                                                             | $h/t$                                              | = | 20.5       |      |               |
| Limit 1                                                                                                 | $S_1$                                              | = | 29.01      |      |               |
| Limit 2                                                                                                 | $S_2$                                              | = | 59.31      |      |               |
| Factored limit state stress                                                                             | $\phi F_L$                                         | = | 131.10 MPa |      |               |
| Stress From Shear force                                                                                 | $f_{sx}$                                           | = | $V/A_w$    |      |               |
|                                                                                                         |                                                    |   | 3.07 MPa   |      |               |
| 3.4.25 Shear in webs (Minor Axis)                                                                       |                                                    |   |            |      |               |
| Clear web height                                                                                        | $b$                                                | = | 41 mm      |      |               |
|                                                                                                         | $t$                                                | = | 2 mm       |      |               |
| Slenderness                                                                                             | $b/t$                                              | = | 20.5       |      |               |
| Factored limit state stress                                                                             | $\phi F_L$                                         | = | 131.10 MPa |      |               |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                         |          |   |             |            |
|-------------------------|----------|---|-------------|------------|
| Stress From Shear force | $f_{sy}$ | = | $V/A_w$     |            |
|                         |          |   | <b>0.06</b> | <b>MPa</b> |

### 6.3 Centre Pole

| NAME                              | SYMBOL             | VALUE         | UNIT            | NOTES       | REF      |
|-----------------------------------|--------------------|---------------|-----------------|-------------|----------|
| <b>62x2.5CHS</b>                  | <b>Centre Pole</b> |               |                 |             |          |
| Alloy and temper                  | 6061-T6            |               |                 |             | AS1664.1 |
| Tension                           | $F_{tu}$           | = 262         | MPa             | Ultimate    | T3.3(A)  |
|                                   | $F_{ty}$           | = 241         | MPa             | Yield       |          |
| Compression                       | $F_{cy}$           | = 241         | MPa             |             |          |
| Shear                             | $F_{su}$           | = 165         | MPa             | Ultimate    |          |
|                                   | $F_{sy}$           | = 138         | MPa             | Yield       |          |
| Bearing                           | $F_{bu}$           | = 551         | MPa             | Ultimate    |          |
|                                   | $F_{by}$           | = 386         | MPa             | Yield       |          |
| Modulus of elasticity             | E                  | = 70000       | MPa             | Compressive |          |
|                                   | $k_t$              | = 1.0         |                 |             | T3.4(B)  |
|                                   | $k_c$              | = 1.0         |                 |             |          |
| <b>FEM ANALYSIS RESULTS</b>       |                    |               |                 |             |          |
| Axial force                       | P                  | = 0.00969     | kN              | compression |          |
|                                   | P                  | = 0           | kN              | Tension     |          |
| In plane moment                   | $M_x$              | = 4.067E-13   | kNm             |             |          |
| Out of plane moment               | $M_y$              | = 0.3925      | kNm             |             |          |
| <b>DESIGN STRESSES</b>            |                    |               |                 |             |          |
| Gross cross section area          | $A_g$              | = 467.3       | mm <sup>2</sup> |             |          |
| In-plane elastic section modulus  | $Z_x$              | = 6682.75     | mm <sup>3</sup> |             |          |
| Out-of-plane elastic section mod. | $Z_y$              | = 6682.75     | mm <sup>3</sup> |             |          |
| Stress from axial force           | $f_a$              | = $P/A_g$     |                 |             |          |
|                                   |                    | = <b>0.02</b> | <b>MPa</b>      | compression |          |
|                                   |                    | = <b>0.00</b> | <b>MPa</b>      | Tension     |          |
| Stress from in-plane bending      | $f_{bx}$           | = $M_x/Z_x$   |                 |             |          |
|                                   |                    | = <b>0.00</b> | <b>MPa</b>      | compression |          |
| Stress from out-of-plane          | $f_{by}$           | = $M_y/Z_y$   |                 |             |          |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                                                                        |             |        |        |             |              |
|--------------------------------------------------------------------------------------------------------|-------------|--------|--------|-------------|--------------|
| bending                                                                                                | =           | 58.73  | MPa    | compression |              |
| Tension                                                                                                |             |        |        |             |              |
| 3.4.3 Tension in rectangular tubes                                                                     |             |        |        |             |              |
| $\phi F_L$                                                                                             | =           | 228.95 | MPa    |             |              |
|                                                                                                        | OR          |        |        |             |              |
| $\phi F_L$                                                                                             | =           | 222.70 | MPa    |             |              |
| COMPRESSION                                                                                            |             |        |        |             |              |
| 3.4.8 Compression in columns, axial, gross section                                                     |             |        |        |             |              |
| 1. General                                                                                             |             |        |        |             | ... 3.4.8.1  |
| Unsupported length of member                                                                           | L           | =      | 1700   | mm          |              |
| Effective length factor                                                                                | k           | =      | 2.2    |             |              |
| Radius of gyration about buckling axis (Y)                                                             | $r_y$       | =      | 21.05  | mm          |              |
| Radius of gyration about buckling axis (X)                                                             | $r_x$       | =      | 21.05  | mm          |              |
| Slenderness ratio                                                                                      | $kLb/ry$    | =      | 177.67 |             |              |
| Slenderness ratio                                                                                      | $kL/rx$     | =      | 177.67 |             |              |
| Slenderness parameter                                                                                  | $\lambda$   | =      | 3.32   |             |              |
|                                                                                                        | $D_c^*$     | =      | 90.3   |             |              |
|                                                                                                        | $S_1^*$     | =      | 0.33   |             |              |
|                                                                                                        | $S_2^*$     | =      | 1.23   |             |              |
|                                                                                                        | $\phi_{cc}$ | =      | 0.950  |             |              |
| Factored limit state stress                                                                            | $\phi F_L$  | =      | 20.79  | MPa         |              |
| 2. Sections not subject to torsional or torsional-flexural buckling                                    |             |        |        |             | ... 3.4.8.2  |
| Largest slenderness ratio for flexural buckling                                                        | $kL/r$      | =      | 177.67 |             |              |
| 3.4.10 Uniform compression in components of columns, gross section - flat plates                       |             |        |        |             |              |
| 1. Uniform compression in components of columns, gross section - flat plates with both edges supported |             |        |        |             | ... 3.4.10.1 |
|                                                                                                        | $k_1$       | =      | 0.35   |             | T3.3(D)      |
| Max. distance between toes of fillets of supporting elements for plate                                 | $b'$        | =      | 57     |             |              |
|                                                                                                        | t           | =      | 2.5    | mm          |              |
| Slenderness                                                                                            | $b/t$       | =      | 22.8   |             |              |
| Limit 1                                                                                                | $S_1$       | =      | 12.34  |             |              |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                                                                                                                      |            |   |                          |      |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---|--------------------------|------|-----------|
| Limit 2                                                                                                                                              | $S_2$      | = | 32.87                    |      |           |
| Factored limit state stress                                                                                                                          | $\phi F_L$ | = | 199.59 MPa               |      |           |
| Most adverse compressive limit state stress                                                                                                          | $F_a$      | = | 20.79 MPa                |      |           |
| Most adverse tensile limit state stress                                                                                                              | $F_a$      | = | 222.70 MPa               |      |           |
| Most adverse compressive & Tensile capacity factor                                                                                                   | $f_a/F_a$  | = | 0.00                     | PASS |           |
| <b>BENDING - IN-PLANE</b>                                                                                                                            |            |   |                          |      |           |
| <b>3.4.15</b> <i>Compression in beams, extreme fibre, gross section rectangular tubes, box sections</i>                                              |            |   |                          |      |           |
| Unbraced length for bending                                                                                                                          | $L_b$      | = | 1700 mm                  |      |           |
| Second moment of area (weak axis)                                                                                                                    | $I_y$      | = | 207165.2 mm <sup>4</sup> |      |           |
| Torsion modulus                                                                                                                                      | $J$        | = | 414330.4 mm <sup>3</sup> |      |           |
| Elastic section modulus                                                                                                                              | $Z$        | = | 6682.75 mm <sup>3</sup>  |      |           |
| Slenderness                                                                                                                                          | $S$        | = | 77.55                    |      |           |
| Limit 1                                                                                                                                              | $S_1$      | = | 0.39                     |      |           |
| Limit 2                                                                                                                                              | $S_2$      | = | 1695.86                  |      |           |
| Factored limit state stress                                                                                                                          | $\phi F_L$ | = | 210.19 MPa               |      | 3.4.15(2) |
| <b>3.4.17</b> <i>Compression in components of beams (component under uniform compression), gross section - flat plates with both edges supported</i> |            |   |                          |      |           |
|                                                                                                                                                      | $k_1$      | = | 0.5                      |      | T3.3(D)   |
|                                                                                                                                                      | $k_2$      | = | 2.04                     |      | T3.3(D)   |
| Max. distance between toes of fillets of supporting elements for plate                                                                               | $b'$       | = | 57 mm                    |      |           |
|                                                                                                                                                      | $t$        | = | 2.5 mm                   |      |           |
| Slenderness                                                                                                                                          | $b/t$      | = | 22.8                     |      |           |
| Limit 1                                                                                                                                              | $S_1$      | = | 12.34                    |      |           |
| Limit 2                                                                                                                                              | $S_2$      | = | 46.95                    |      |           |
| Factored limit state stress                                                                                                                          | $\phi F_L$ | = | 199.59 MPa               |      |           |
| Most adverse in-plane bending limit state stress                                                                                                     | $F_{bx}$   | = | 199.59 MPa               |      |           |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                                                                                                                           |                                                    |        |                  |      |               |
|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------|------------------|------|---------------|
| Most adverse in-plane bending capacity factor                                                                             | $f_{bx}/F_{bx}$                                    | =      | 0.00             | PASS |               |
| <b>BENDING - OUT-OF-PLANE</b>                                                                                             |                                                    |        |                  |      |               |
| <i>NOTE: Limit state stresses, <math>\phi F_L</math> are the same for out-of-plane bending (doubly symmetric section)</i> |                                                    |        |                  |      |               |
| Factored limit state stress                                                                                               | $\phi F_L$                                         | =      | 199.59 MPa       |      |               |
| Most adverse out-of-plane bending limit state stress                                                                      | $F_{by}$                                           | =      | 199.59 MPa       |      |               |
| Most adverse out-of-plane bending capacity factor                                                                         | $f_{by}/F_{by}$                                    | =      | 0.29             | PASS |               |
| <b>COMBINED ACTIONS</b>                                                                                                   |                                                    |        |                  |      |               |
| <b>4.1.1 Combined compression and bending</b>                                                                             |                                                    |        |                  |      |               |
|                                                                                                                           | $F_a$                                              | =      | 20.79 MPa        |      | ... 4.1.1(2)  |
|                                                                                                                           | $F_{a0}$                                           | =      | 199.59 MPa       |      | ... 3.4.8     |
|                                                                                                                           | $F_{bx}$                                           | =      | 199.59 MPa       |      | ... 3.4.10    |
|                                                                                                                           | $F_{by}$                                           | =      | 199.59 MPa       |      | ... 3.4.17    |
|                                                                                                                           | $f_a/F_a$                                          | =      | 0.001            |      | ... 3.4.17    |
| Check:                                                                                                                    | $f_a/F_a + f_{bx}/F_{bx} + f_{by}/F_{by} \leq 1.0$ |        |                  |      | ... 4.1.1 (3) |
| i.e.                                                                                                                      | 0.30                                               | $\leq$ | 1.0              | PASS |               |
| <b>SHEAR</b>                                                                                                              |                                                    |        |                  |      |               |
| <b>3.4.24 Shear in webs (Major Axis)</b>                                                                                  |                                                    |        |                  |      |               |
| Clear web height                                                                                                          | $h$                                                | =      | 57 mm            |      | ... 4.1.1(2)  |
|                                                                                                                           | $t$                                                | =      | 2.5 mm           |      |               |
| Slenderness                                                                                                               | $h/t$                                              | =      | 22.8             |      |               |
| Limit 1                                                                                                                   | $S_1$                                              | =      | 29.01            |      |               |
| Limit 2                                                                                                                   | $S_2$                                              | =      | 59.31            |      |               |
| Factored limit state stress                                                                                               | $\phi F_L$                                         | =      | 131.10 MPa       |      |               |
| Stress From Shear force                                                                                                   | $f_{sx}$                                           | =      | V/A <sub>w</sub> |      |               |
|                                                                                                                           |                                                    |        | 0.00 MPa         |      |               |
| <b>3.4.25 Shear in webs (Minor Axis)</b>                                                                                  |                                                    |        |                  |      |               |
| Clear web height                                                                                                          | $b$                                                | =      | 57 mm            |      |               |



## Civil & Structural Engineering Design Services Pty. Ltd.

|                             |            |   |               |            |  |  |
|-----------------------------|------------|---|---------------|------------|--|--|
|                             | t          | = | 2.5           | mm         |  |  |
| Slenderness                 | b/t        | = | 22.8          |            |  |  |
| Factored limit state stress | $\phi F_L$ | = | <b>131.10</b> | <b>MPa</b> |  |  |
| Stress From Shear force     | $f_{sy}$   | = | $V/A_w$       |            |  |  |
|                             |            |   | <b>0.81</b>   | <b>MPa</b> |  |  |

## 7 Summary

### 7.1 Conclusions

- The 3m x 3m Pinnacle Range Pagoda Tent structure as specified has been analyzed with a conclusion that it has the capacity to withstand wind speeds up to and including **70km/hr**.
- For forecast winds in excess of **70km/hr** – all fabric shall be removed from the frames, and the structure should be completely dismantled.
- For uplift due to 60km/hr, 1.4 kN (140kg) holding down weight/per leg for upright support is required.
- The bearing pressure of soil should be clarified and checked by an engineer prior to any construction for considering foundation and base plate.

| MEMBER(S)                  | Section       | b    | d    | t   |
|----------------------------|---------------|------|------|-----|
|                            |               | mm   | mm   | mm  |
| <b>Upright Support</b>     | 64.5x64.5x2.5 | 64.5 | 64.5 | 2.5 |
| <b>Centre Pole (Steel)</b> | 76.1x3.2CHS   | 76.1 | -    | 3.2 |
| <b>Eave</b>                | 64.5x64.5x2.5 | 64.5 | 64.5 | 2.5 |

Yours faithfully,

E.A. Bennett M.I.E. Aust. NPER 198230



## 8 Appendix A – Base Anchorage Requirements

| Tent Span | Sile Type | Required Weight<br>Per Leg |
|-----------|-----------|----------------------------|
| 3 m       | A         | 125kg                      |
|           | B         | 125kg                      |
|           | C         | 125kg                      |
|           | D         | 125kg                      |
|           | E         | 125kg                      |

### Definition of Soil Types:

Type A : Loose sand such as dunal sand. Uncompacted site filling may also be included in this soil type.

Type B : Medium to stiff clays or silty clays

Type C: Moderately compact sand or gravel eg. of alluvial origin.

Type D : Compact sand and gravel eg. Weathered sandstone or compacted quarry rubble hardstand

Type E : Concrete slab on ground. Number of dyna bolts and slab thickness to be designed.



## 9 Appendix B – Hold Down Method Details

