



AUSTRALIA'S PREMIER SUPPLIER OF CUSTOM PRINTED MARQUEES

3m x 3m DO137877 - Opera Australia





EXTREME MARQUEES

WHAT YOU'LL NEED

Drill

Socket Set

Ladder

Mallet

Forklift / Crane / Scissor Lift *

Tape Measure

Stringline

Level

Marking Pencil

Stanley Knife

Alan Key (supplied)

Warning read instructions carefully before use.

Recommended procedure to follow in this document.

For safety reasons it is recommended that four persons set up any Crest Marquee.

Ensure area is free from any sharp objects & overhead objects.




www.extrememarquees.com.au 1300 850 832


3m x 3m DO137877 - Opera Australia **PACKING LIST**

Content	Item Name	Specification	Unit	Qty	Packing
Pagodas Steel Parts and PVC fabric	base plate	265*265*180	pc	12	Pallet
	corner connector	226*268*260	pc	12	
	top cap	Φ290*346	pc	3	
	ridge connector	113*113*500	pc	3	
	bolts and nuts	M10X100	set	14	
	roof cover-3m pagoda	2350*3005	pc	2	
	side wall-3m pagoda	2560*2900	pair	8	
	installing stripe-3m pagoda	Φ8*3000	pc	8	
	roof cover-4m pagoda	3070*4000	pc	1	
	side wall-4m pagoda	2560*3900	pair	4	
	installing stripe-4m pagoda	Φ8*4000	pc	4	
C3X3 Aluminum Frame	eave purlin	63*63*2846	pc	8	In bundles
	roof purlin	45*45*2035	pc	8	
	side legs	63*63*2394	pc	8	
	adjustable tube	Φ32*730	pc	2	
	bearing bar for side wall	Φ26*3000	pc	8	
C4x4 Aluminum Frame	eave purlin	63*63*3846	pc	4	In bundles
	roof purlin	45*45*2780	pc	4	
	side legs	63*63*2394	pc	4	
	adjustable tube	Φ32*1040	pc	1	
	bearing bar for side wall	φ26*4000	pc	4	


3m x 3m DO137877 - Opera Australia SETOUT PLAN

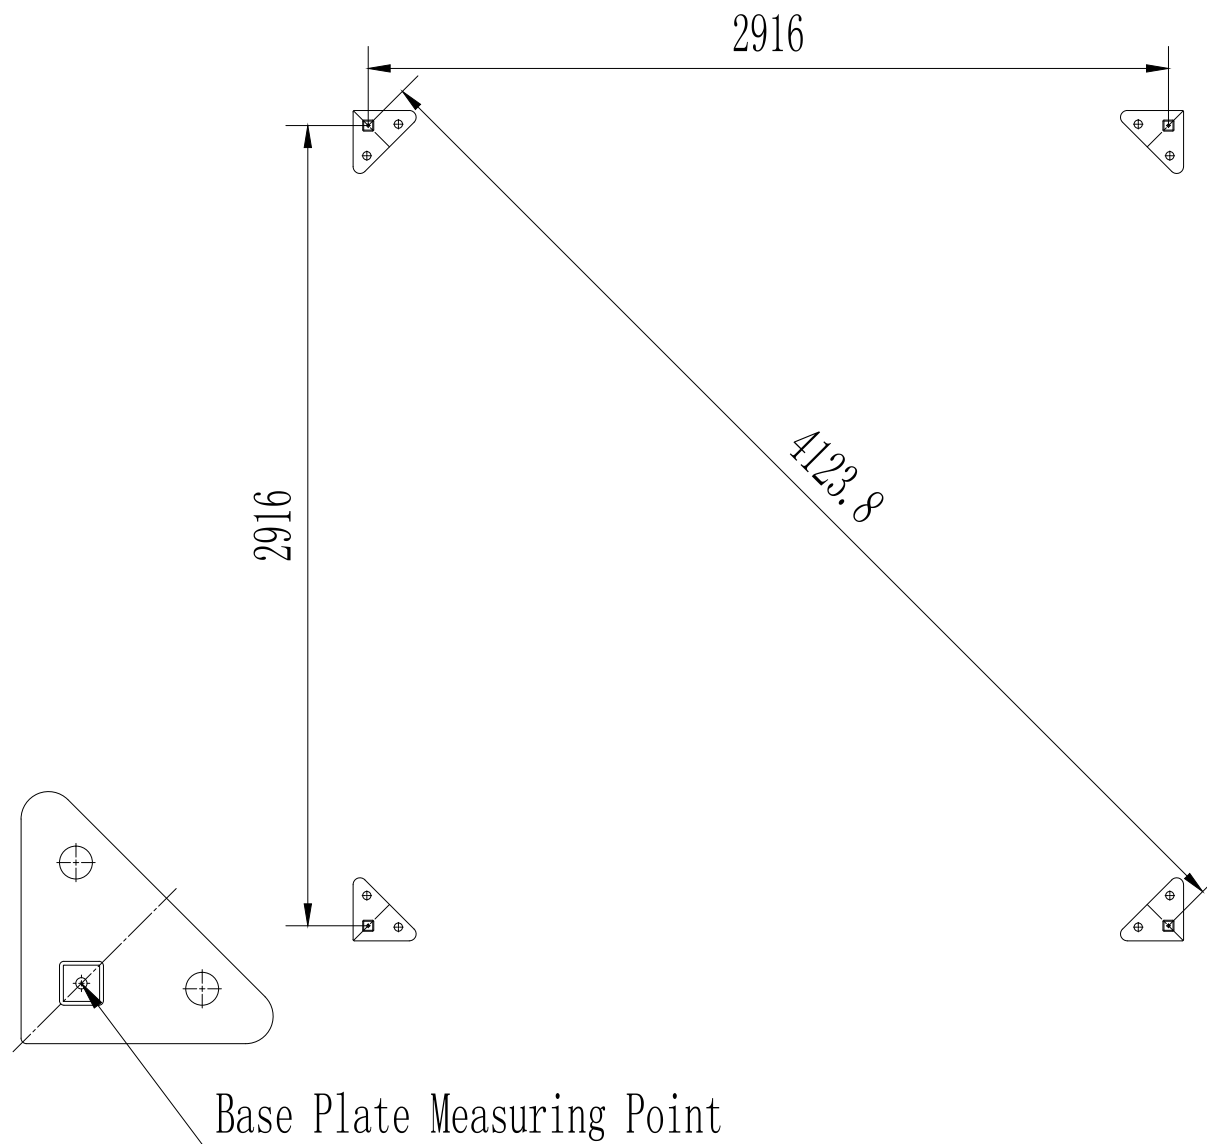

ELEVATION

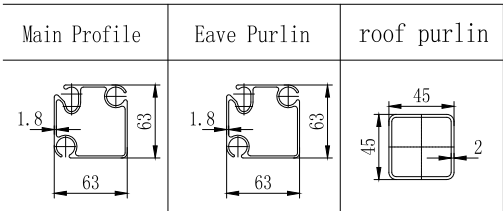


1

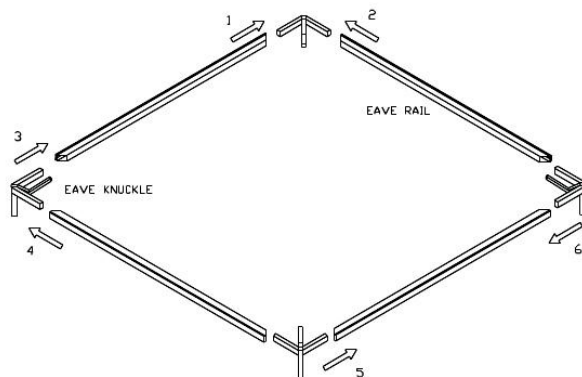


Lay out 4 x Eave Rails and 4 x Corner Connectors as above.

2

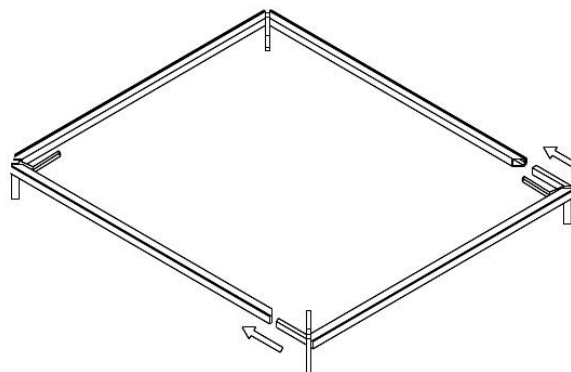


Fit together as shown.

3

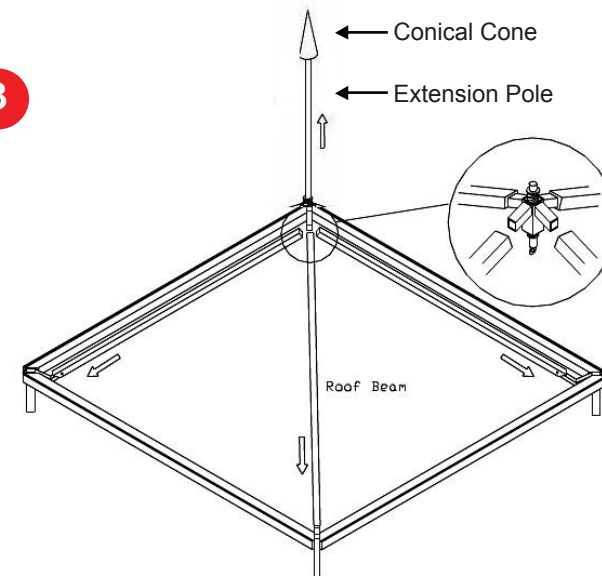


Insert 4 x Roof Beams to Corner Connectors then fit Roof Adjuster (make sure it is wound down to the lowest point).

4

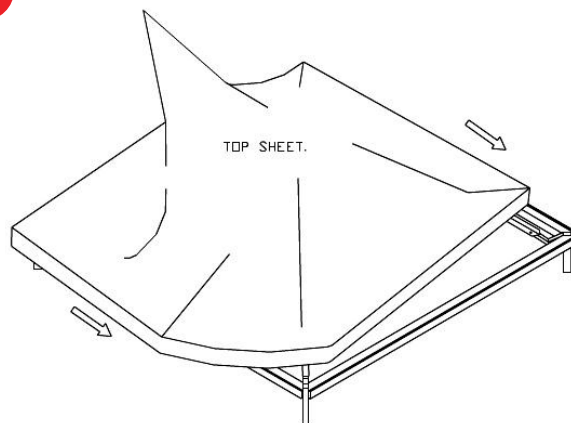

Fit roof over the frame.


5

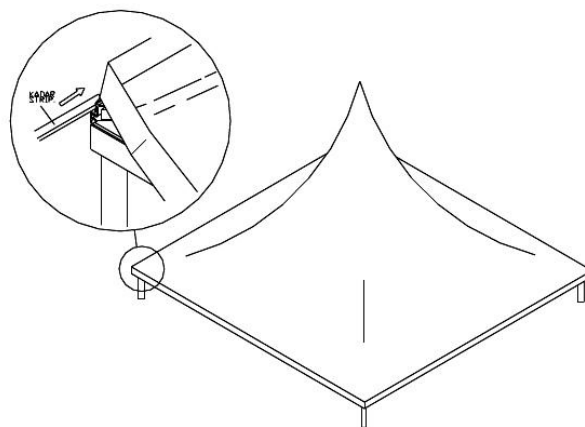

Fit Roof Keder into outer sail track on the side of the Eave Beam. Insert Kedar strip into the top of the roof in this same track.


Repeat on all sides.

6

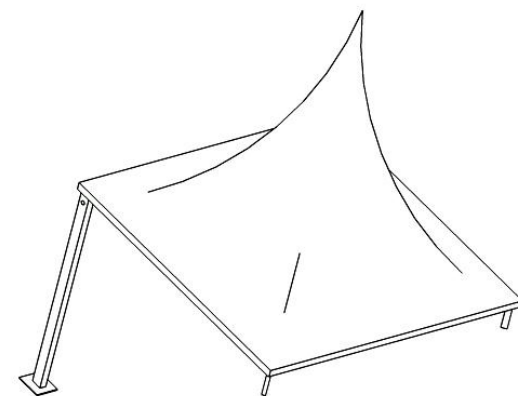


Fit foot plates to all legs using 2 or more people. Raise one side and fit 2 x legs. Fit extension pole and conical cone before fitting remaining legs.

7

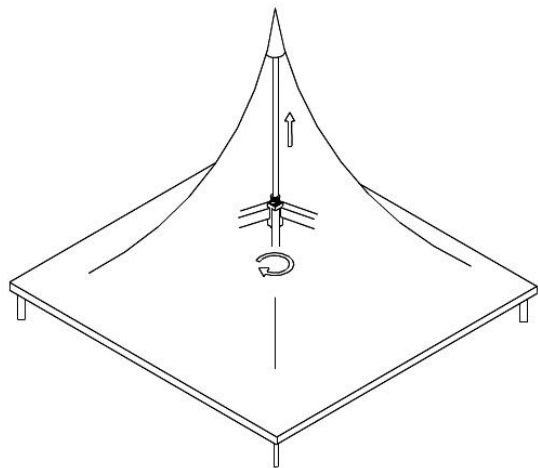

Wind up Roof Adjuster until tight.


8

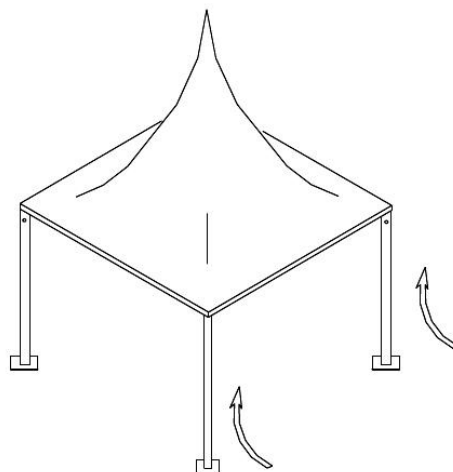

Raise other side and fit legs.


Make sure Marquee is secured to ground by approved methods.

9


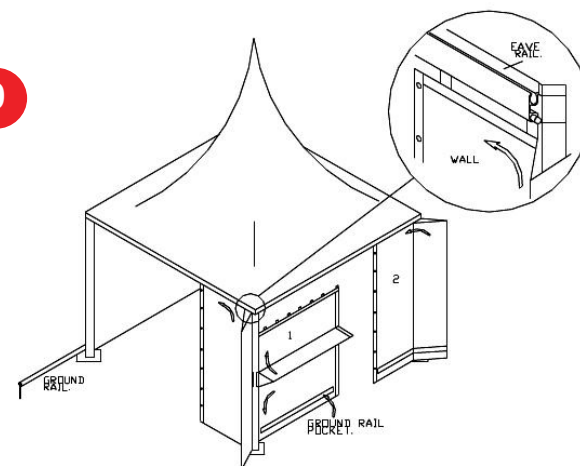


Fit walls into sail track.


1 Assemble Frames on ground and prepare for erection.

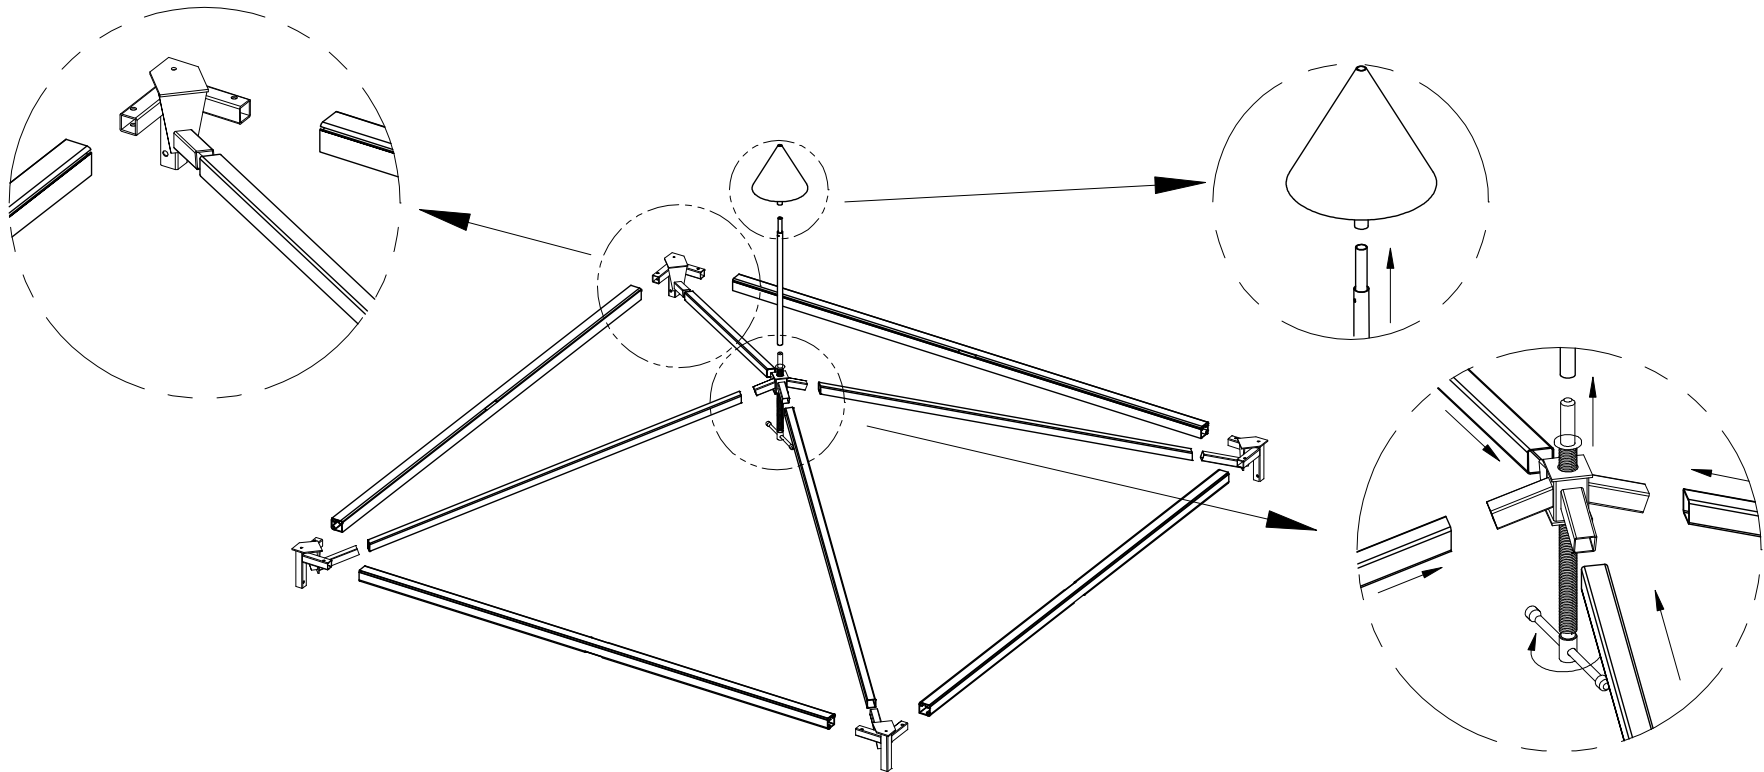

2 Roof Cover

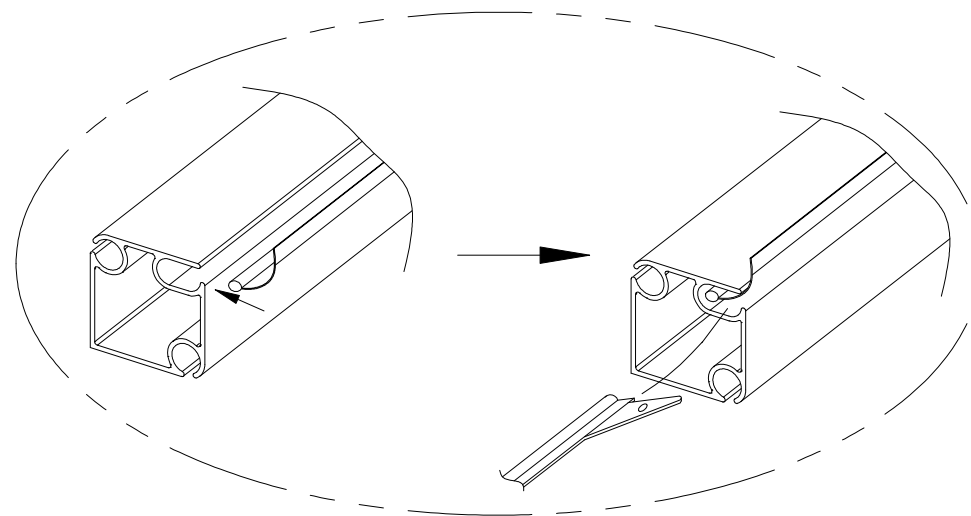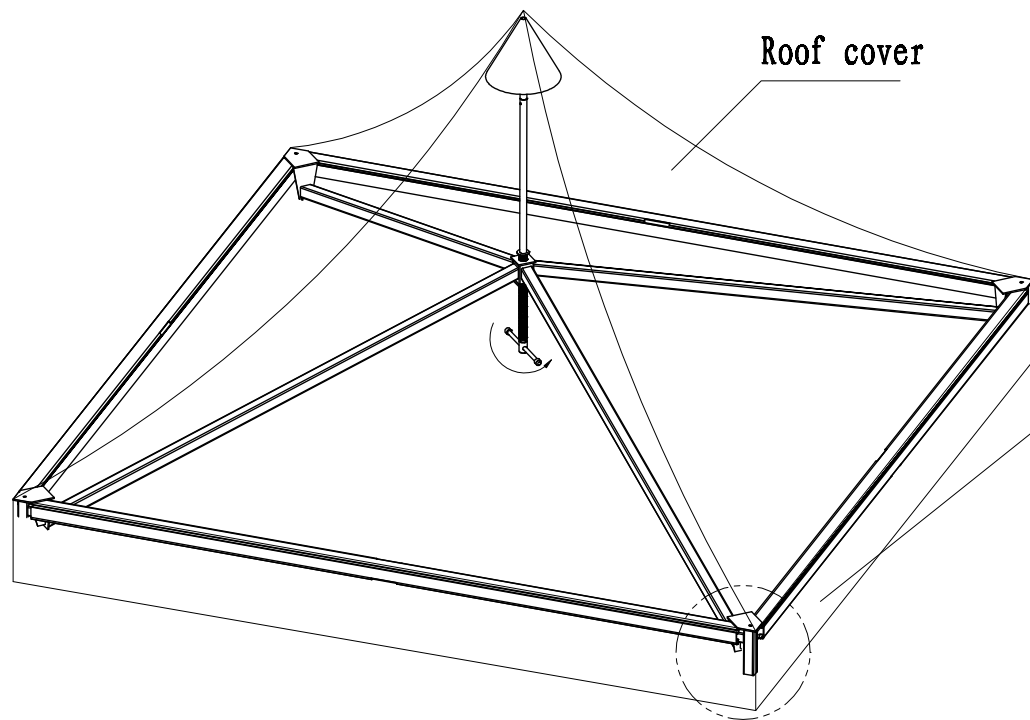

3 Upright Support

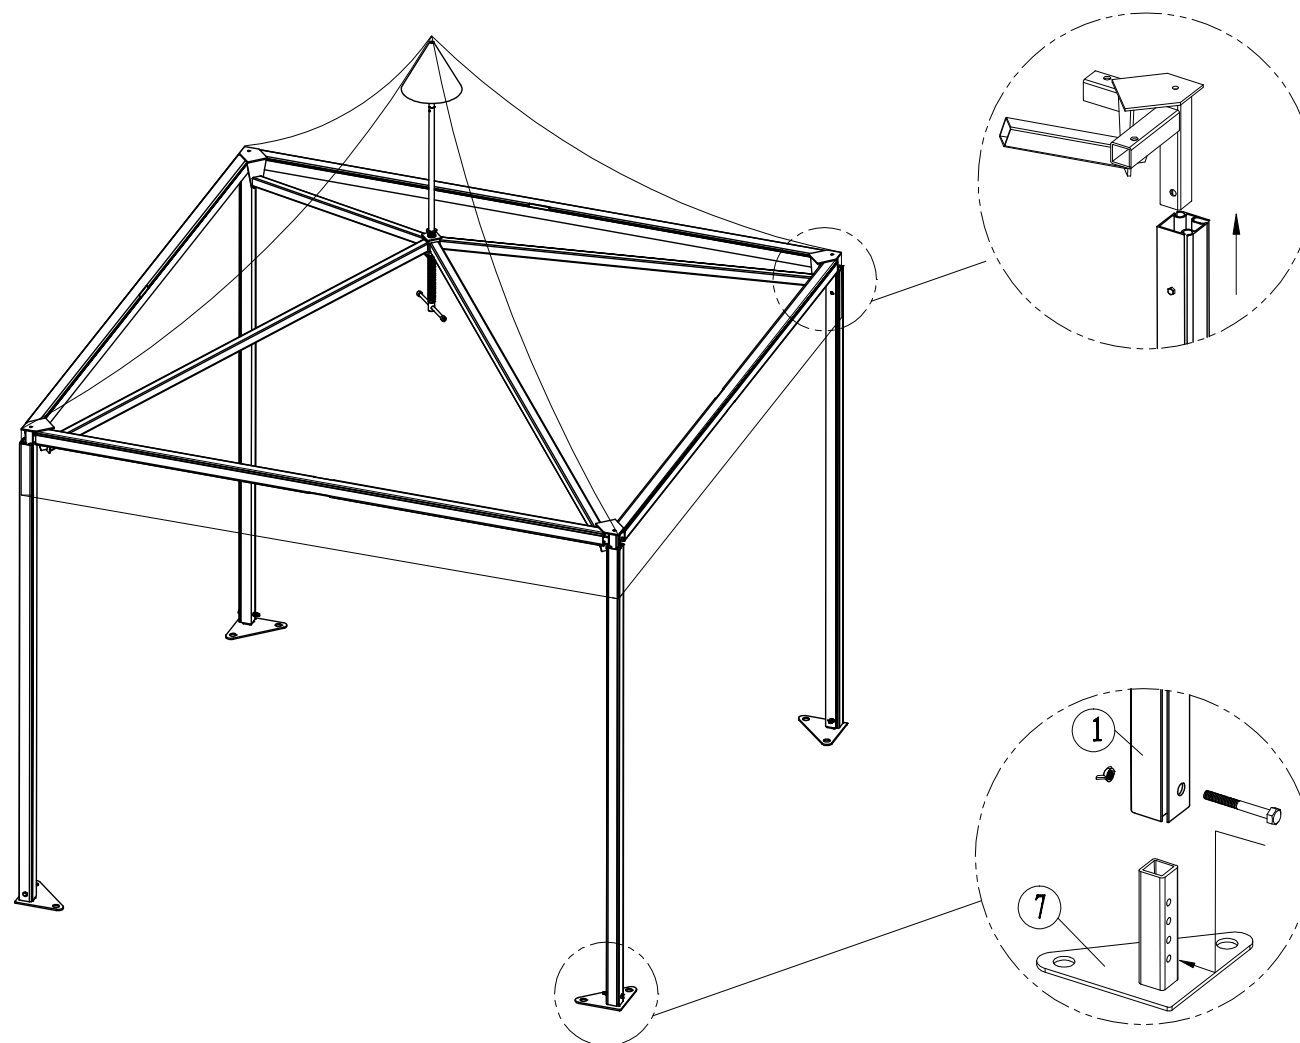

4 Sidewalls

