





WHAT YOU'LL NEED

Drill

Socket Set

Ladder

Mallet

Forklift / Crane / Scissor Lift *

Tape Measure

Stringline

Level

Marking Pencil

Stanley Knife

Alan Key (supplied)

Warning read instructions carefully before use.

Recommended procedure to follow in this document. For safety reasons it is recommended that four persons set up any Crest Marquee.


Ensure area is free from any sharp objects & overhead objects.

3m x 3m & 4m x 4m DO137877 - Opera Australia PACKING LIST


Content	Item Name	Specification	Unit	Qty	Packing
Pagodas Steel Parts and PVC fabric	base plate	265*265*180	рс	12	Pallet
	corner connector	226*268*260	рс	12	
	top cap	Ф290*346	рс	3	
	ridge connector	113*113*500	рс	3	
	bolts and nuts	M10X100	set	14	
	roof cover-3m pagoda	2350*3005	рс	2	
	side wall-3m pagoda	2560*2900	pair	8	
	installing stripe-3m pagoda	Ф8*3000	рс	8	
	roof cover-4m pagoda	3070*4000	рс	1	
	side wall-4m pagoda	2560*3900	pair	4	
	installing stripe-4m pagoda	Ф8*4000	рс	4	
C3X3 Aluminum Frame	eave purlin	63*63*2846	рс	8	In bundles
	roof purlin	45*45*2035	рс	8	
	side legs	63*63*2394	рс	8	
	adjustable tube	Ф32*730	рс	2	
	bearing bar for side wall	Ф26*3000	рс	8	
C4x4 Aluminum Frame	eave purlin	63*63*3846	рс	4	In bundles
	roof purlin	45*45*2780	рс	4	
	side legs	63*63*2394	рс	4	
	adjustable tube	Ф32*1040	рс	1	
	bearing bar for side wall	ф26*4000	рс	4	




4m x 4m DO137877 - Opera Australia SETOUT PLAN

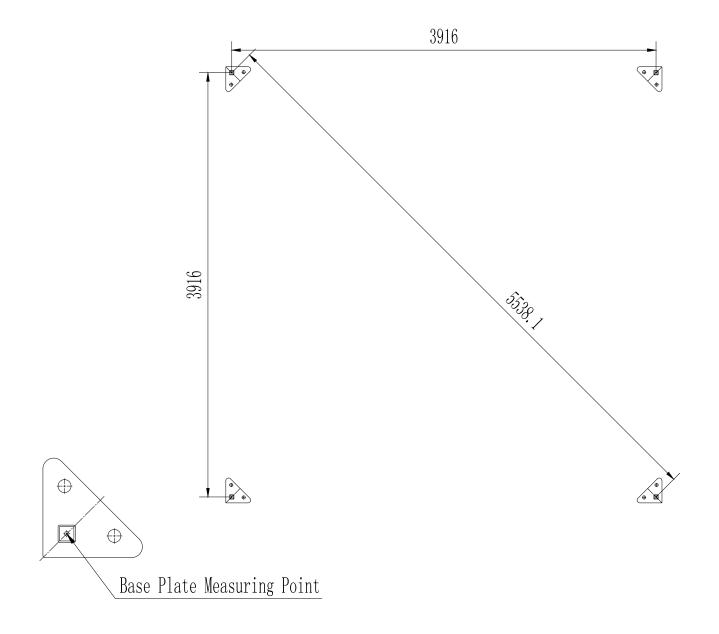

4m x 4m DO137877 - Opera Australia ELEVATION

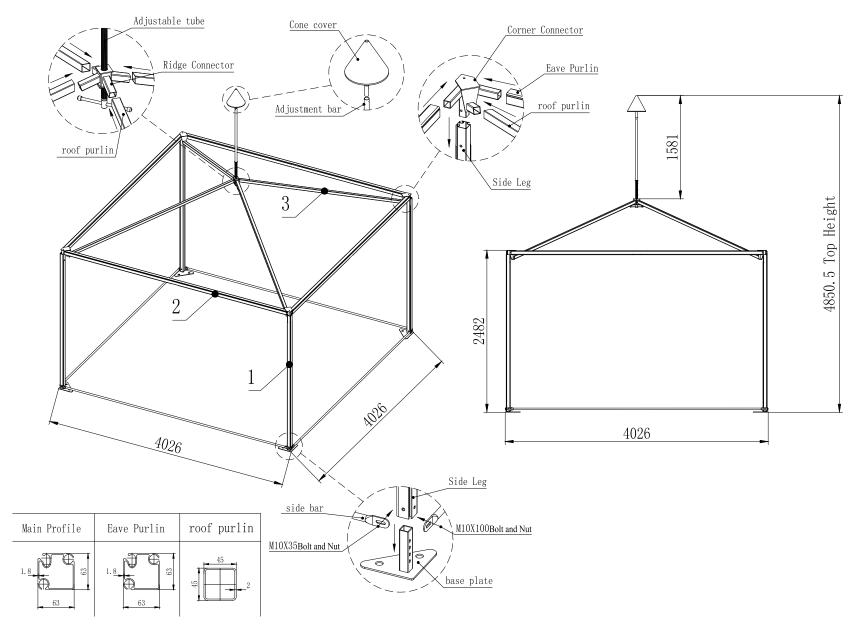


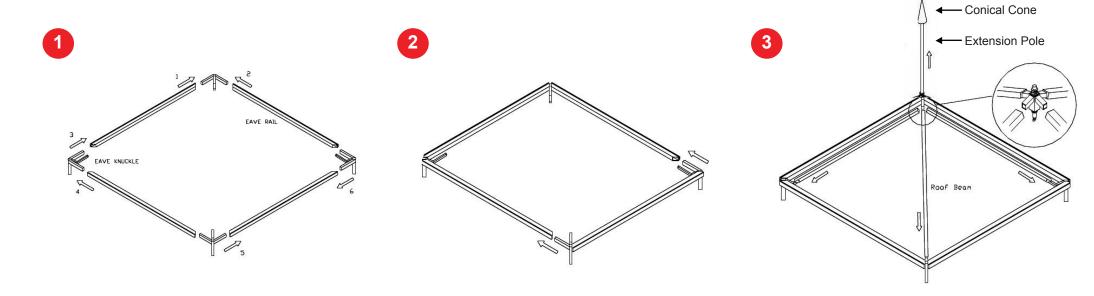



Lay out 4 x Eave Rails and 4 x Corner Connectors as above.

Fit together as shown.

Insert 4 x Roof Beams to Corner Connectors then fit Roof Adjuster (make sure it is wound down to the lowest point).

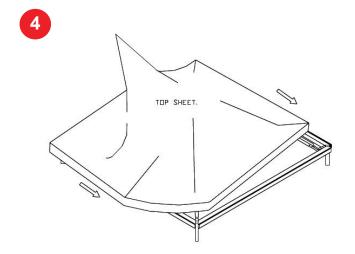







Fit roof over the frame.


Fit Roof Keder into outer sail track on the side of the Eave Beam. Insert Kedar strip into the top of the roof in this same track.

Repeat on all sides.

Fit foot plates to all legs using 2 or more people. Raise one side and fit 2 x legs. Fit extension pole and conical cone before fitting remaining legs.







Wind up Roof Adjuster until tight.

Raise other side and fit legs.

Make sure Marquee is secured to ground by approved methods.

Fit walls into sail track.



Assemble Frames on ground and prepare for erection.

