

The logo features a stylized red and black swoosh above the company name.

# **EXTREME MARQUEES**

AUSTRALIA'S PREMIER SUPPLIER OF CUSTOM PRINTED MARQUEES







# EXTREME MARQUEES

## WHAT YOU'LL NEED

Drill

Socket Set

Ladder

Mallet

Forklift / Crane / Scissor Lift \*

Tape Measure

Stringline

Level

Marking Pencil

Stanley Knife

Alan Key (supplied)

***Warning read instructions carefully before use.***

Recommended procedure to follow in this document.


For safety reasons it is recommended that four persons set up any Crest Marquee.

Ensure area is free from any sharp objects & overhead objects.




[www.extrememarquees.com.au](http://www.extrememarquees.com.au) 1300 850 832

## SETOUT PLAN

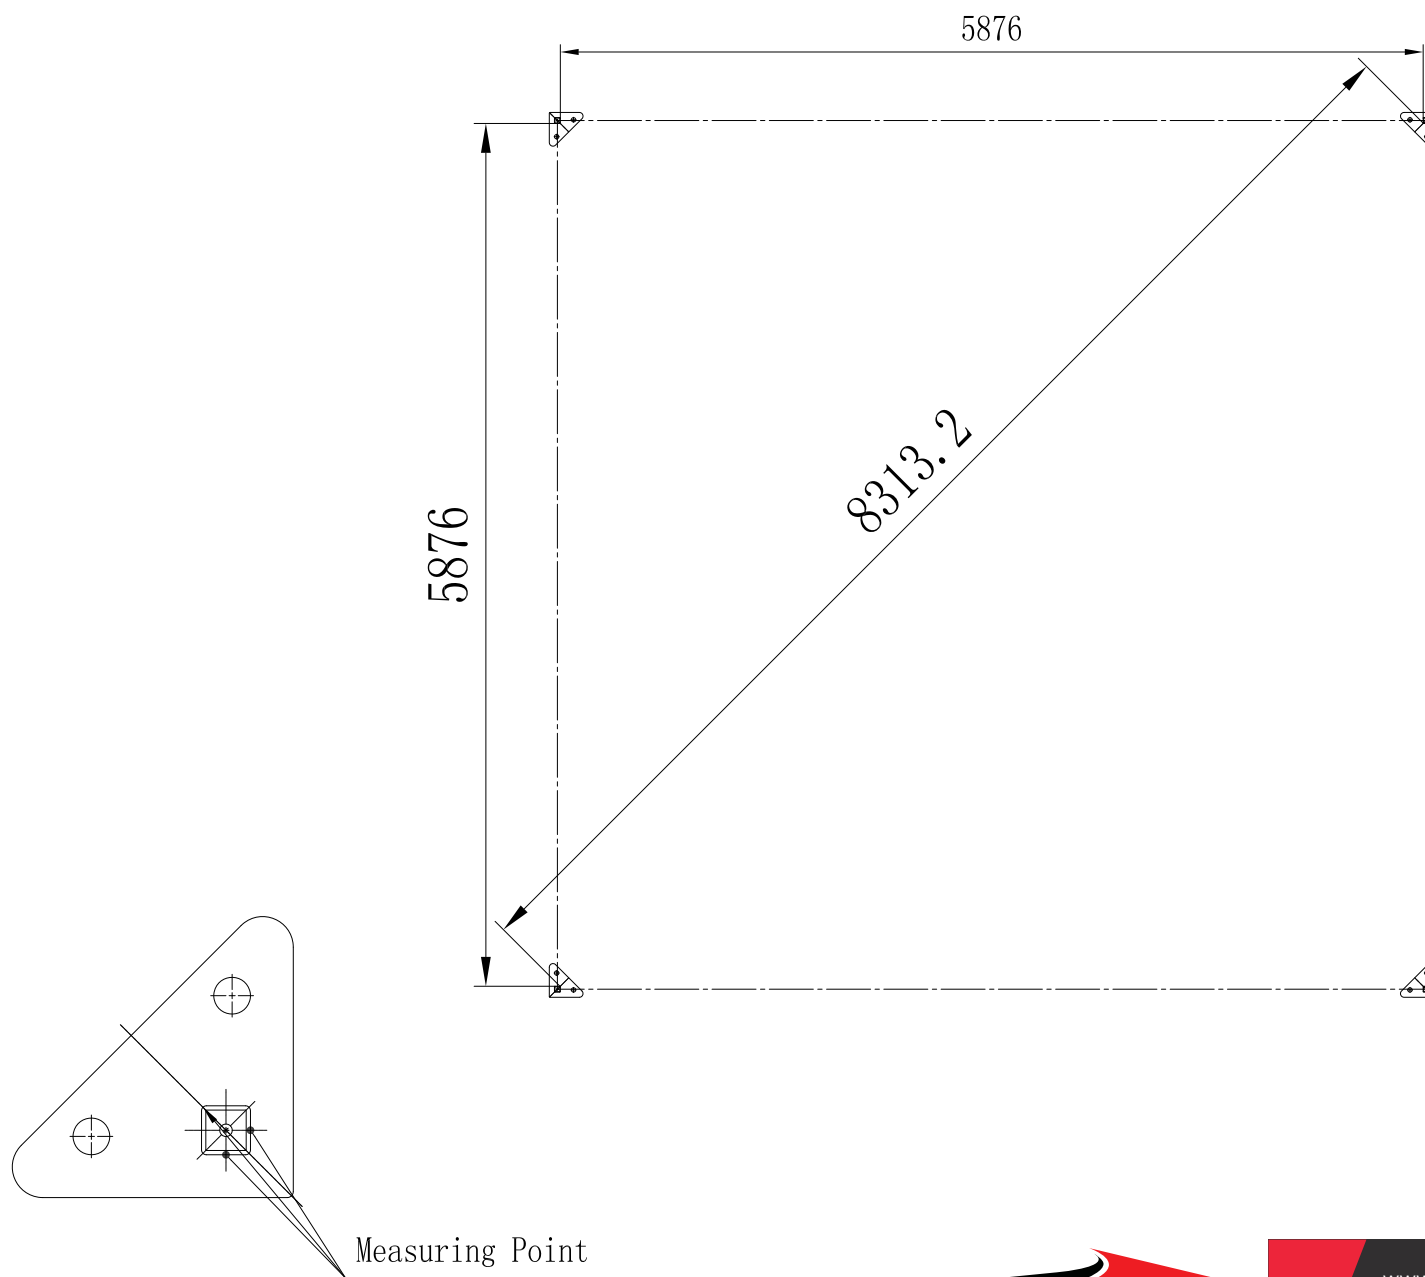


# ELEVATION

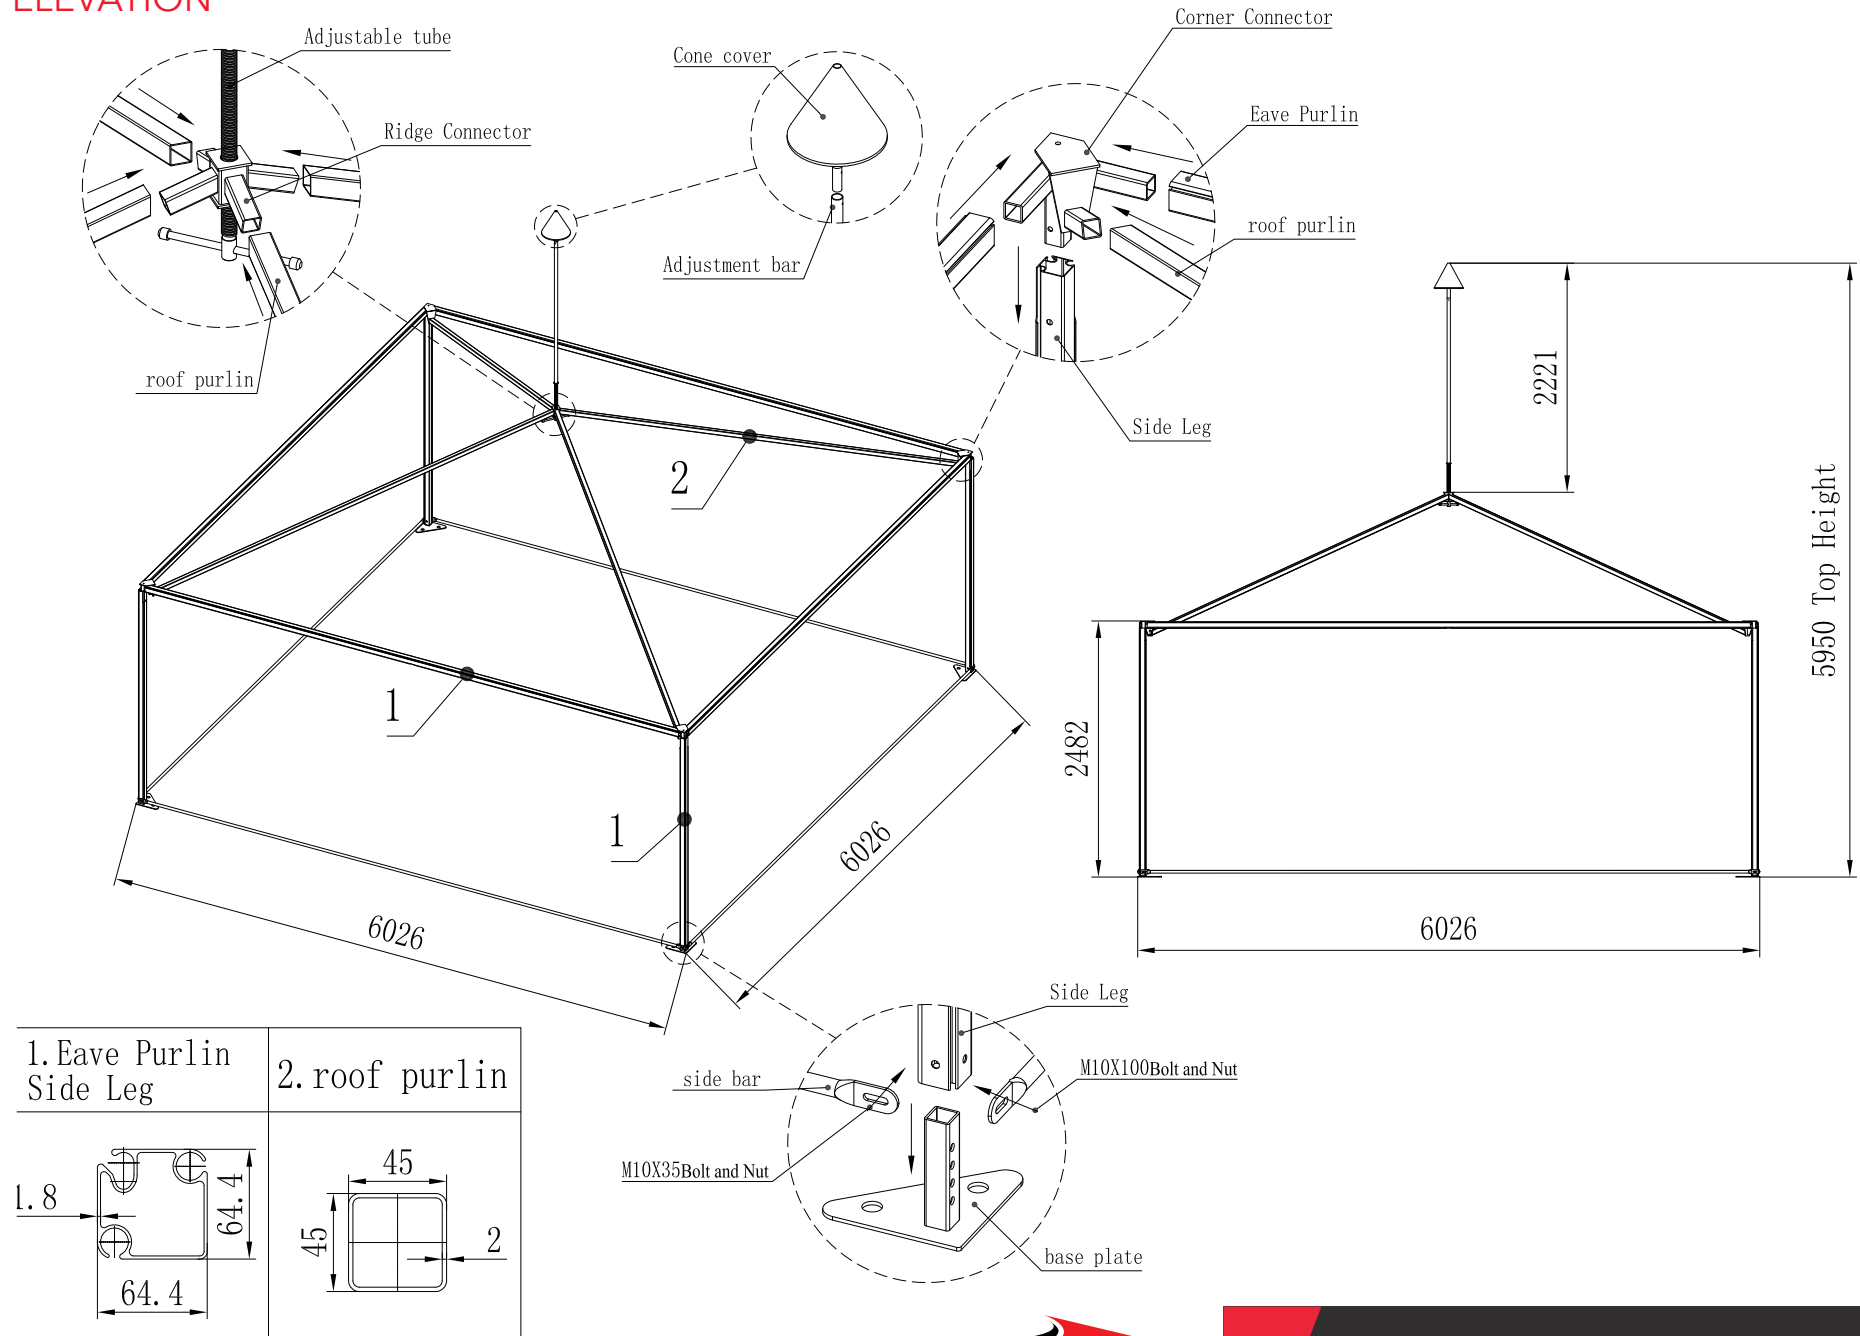

## PACKING LIST


Packing Number	Item Name	Specifications	Unit	Qty	U.W.	T.W.	CBM
1#	base plate for side legs	265*265*180	PCS	8	2.2	17.6	2
	eave connector	226*268*260	PCS	8	4	32	
	top cap	Φ290*346	PCS	2	2.34	4.68	
	ridge connector	113*113*500	PCS	2	4.5	9	
	bolts	M10*100	PCS	10	0.1	1	
	bolts	M10*35	PCS	10	0.01	0.1	
	nuts	M10	PCS	10	0.01	0.1	
	roof cover	2350*6000	PCS	2	16.99	33.97	
	plastic bar for installation	Φ8*6000	PCS	8	0.7	5.6	
	side wall cover	2560*5900	PCS	8	17.84	142.7	
	packing bag for roof cover	1100*600*300	PCS	2	1.4	2.8	
	packing bag for side wall	1000*450*400	PCS	2	1.148	2.296	
	weight bearing plate	500*760*20	PCS	8	15.67	125.4	
	expansion bolts	M12*120	PCS	18	0.13	2.34	
	big washer	Φ14*Φ40*3	PCS	18	0.03	0.54	
	bolts	M16*30	PCS	18	0.16	2.88	
	flat washer	Φ20*Φ50*3	PCS	18	0.03	0.54	
	PVC bag with logo for bolts	100*250*400	PCS	2	0.59	1.18	

1

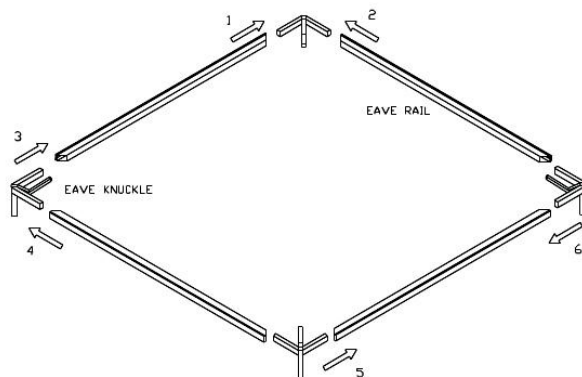


Lay out 4 x Eave Rails and 4 x Corner Connectors as above.

2

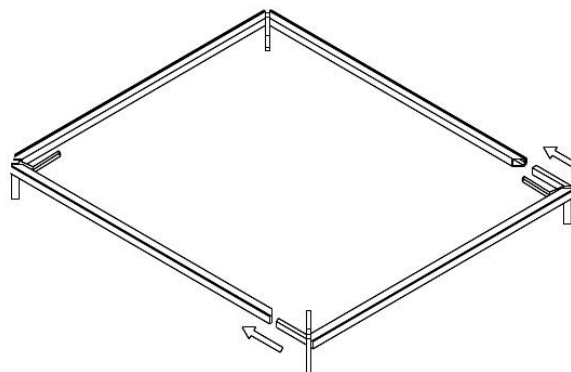


Fit together as shown.

3

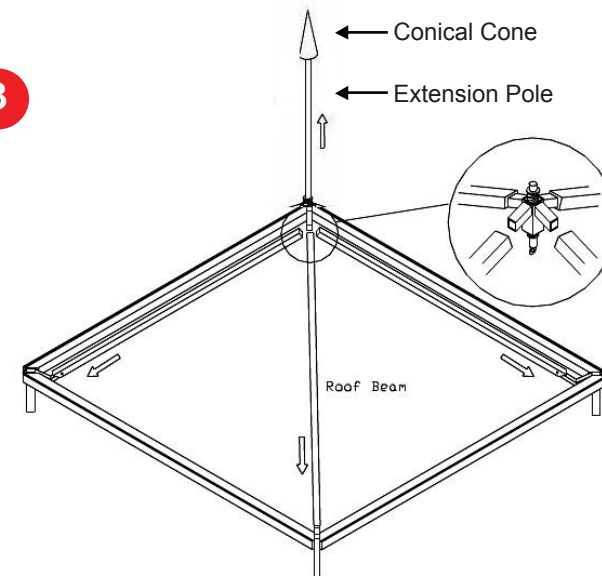


Insert 4 x Roof Beams to Corner Connectors then fit Roof Adjuster (make sure it is wound down to the lowest point).

4

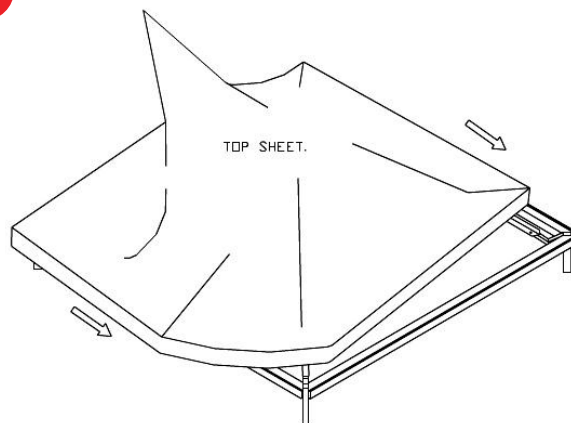

Fit roof over the frame.


5

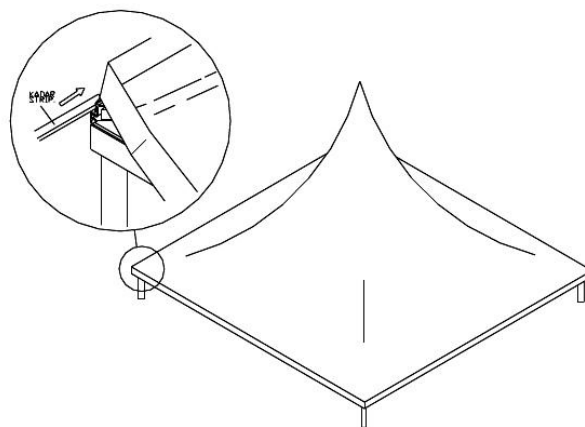

Fit Roof Keder into outer sail track on the side of the Eave Beam. Insert Kedar strip into the top of the roof in this same track.


Repeat on all sides.

6

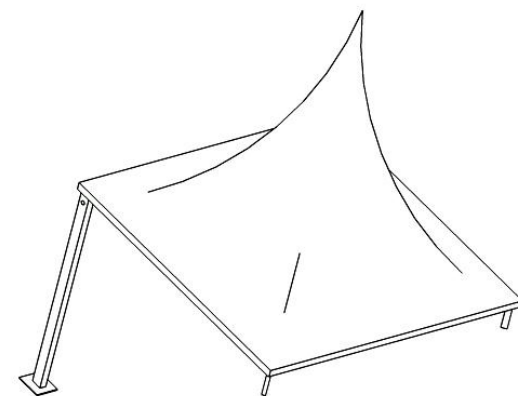


Fit foot plates to all legs using 2 or more people. Raise one side and fit 2 x legs. Fit extension pole and conical cone before fitting remaining legs.

7

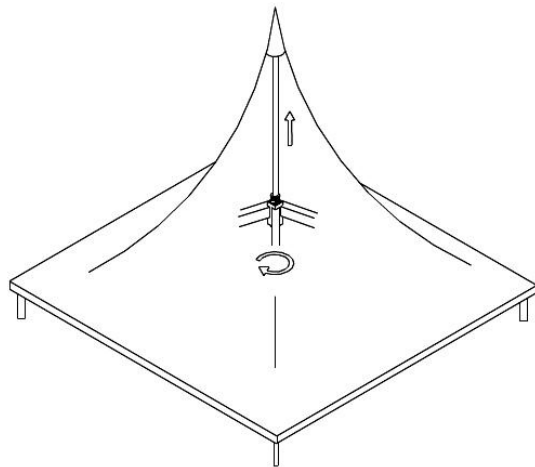

Wind up Roof Adjuster until tight.


8

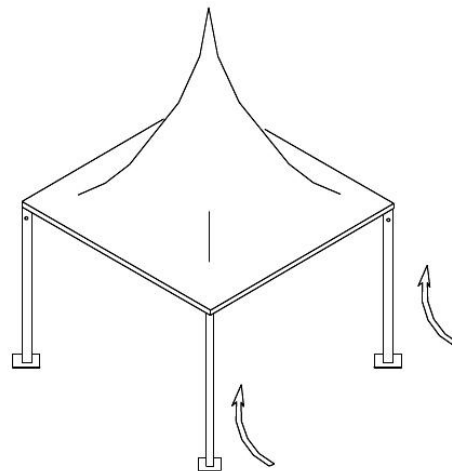

Raise other side and fit legs.

Make sure Marquee is secured to ground by approved methods.


9

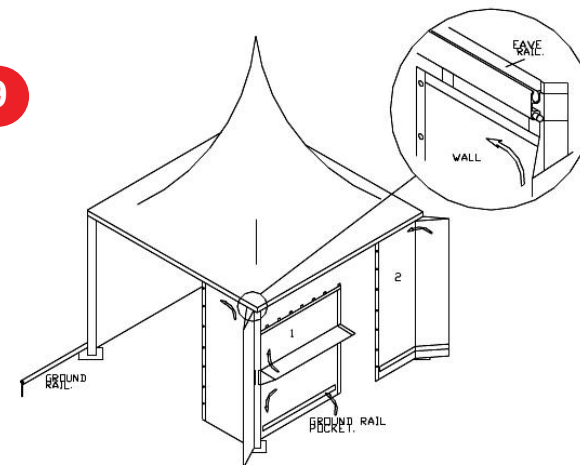



Fit walls into sail track.




**1** Assemble Frames on ground and prepare for erection.

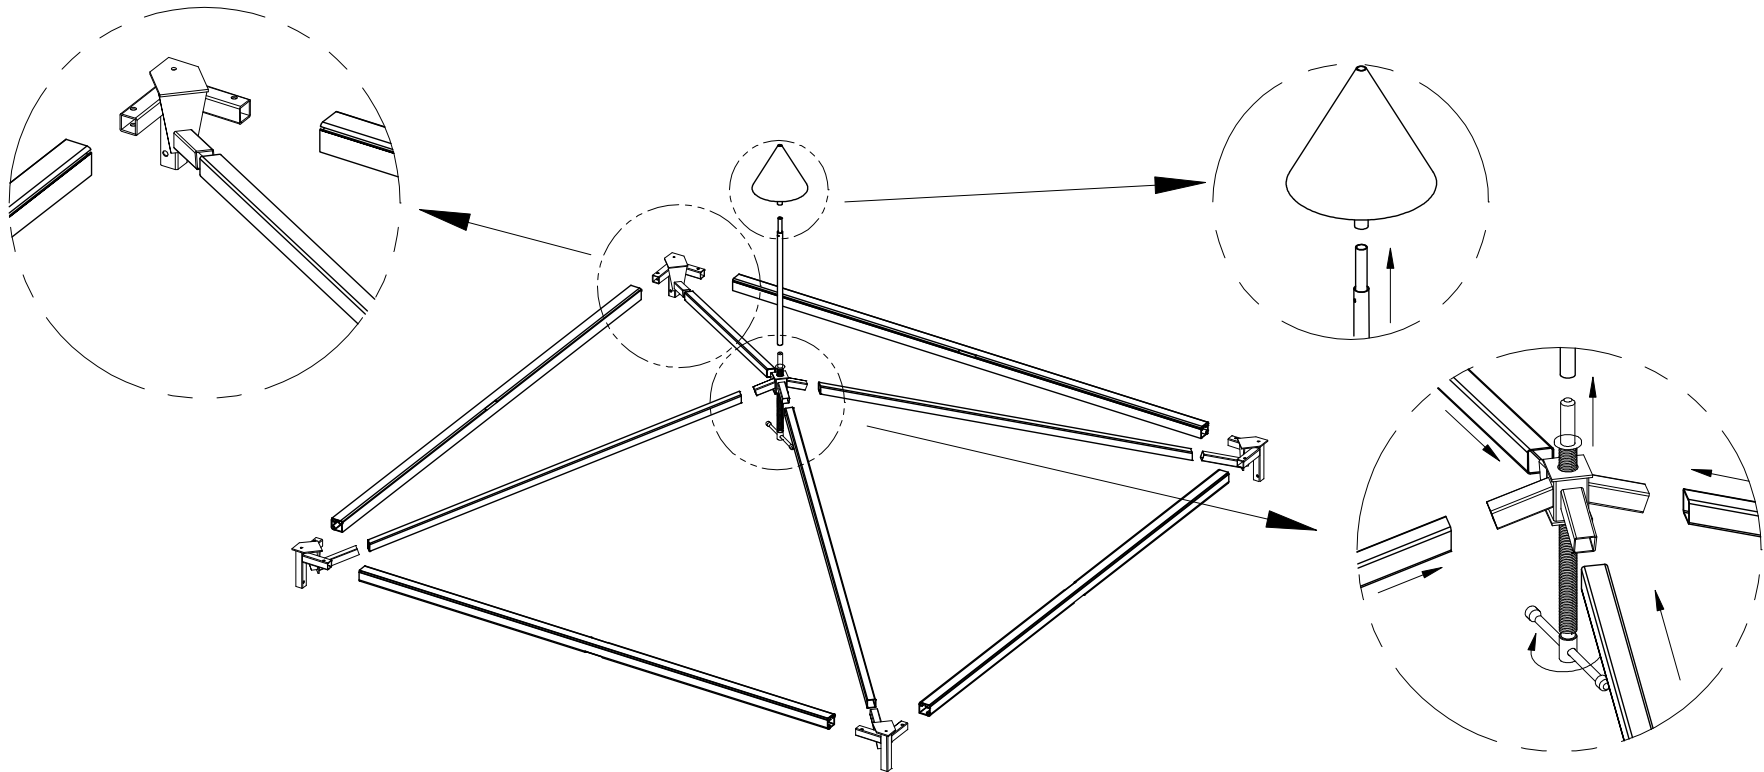

## 2 Roof Cover

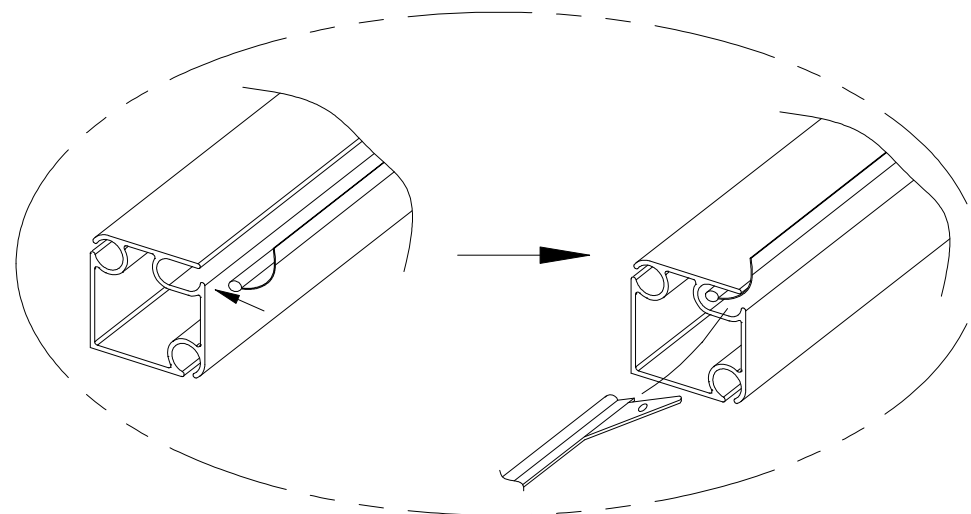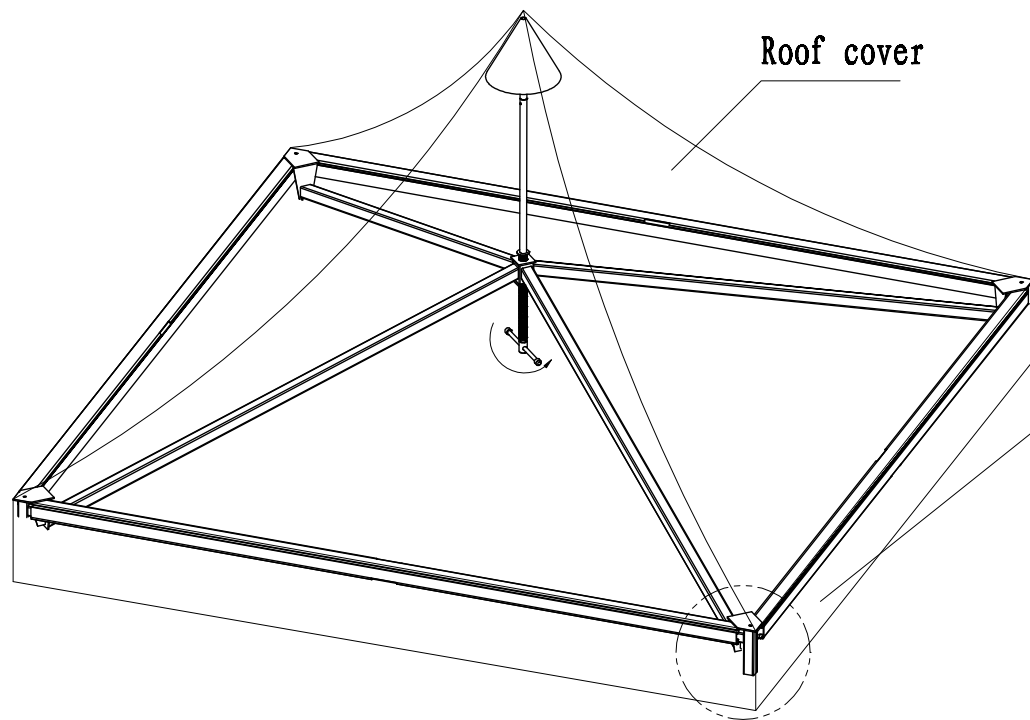

### 3 Upright Support

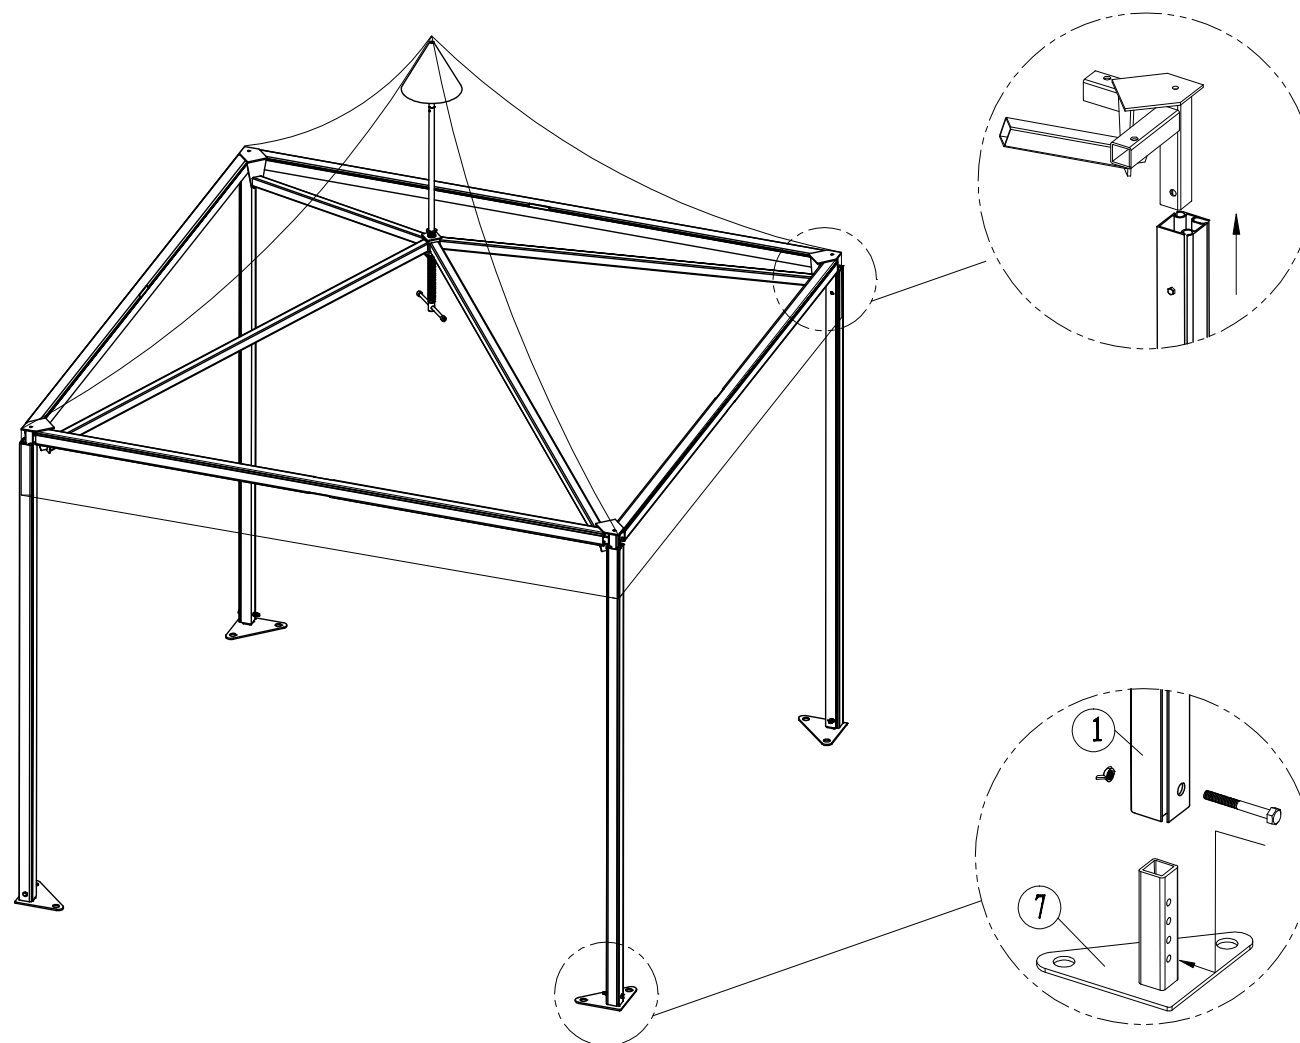

## 4 Sidewalls

